

VIBIA

Recommended sales prices - VAT
not included in this price list updates
models and finishes in production,
which may differ from photographs
published in catalogue.





Index

Africa 328	Dots Outdoor 274	Mayfair Mini 318	Sticks Solo 478
Algorithm Grid 70	Duo 286	Meridiano 278	Structural 178
Algorithm Free 80	Duo Petra 290	Musa 488	Suite 378
Alpha 500	Empty 254	North 332	Tempo 348
Array 130	Flamingo 96	Offset 112	Top 92
Balance 304	Flamingo Mini 100	Origami 260	Tube Free 382
Bamboo 282	Flat 360	Out 256	Up 258
Bigger 240	Funnel 142	Palma 232	Warm 296
Bind 430	Ghost 300	Palo Alto 264	Wind 246
Bind Solo 448	Guise 152	Pin 104	Wireflow 48
Break 250	Halo 158	Plusminus 388	Wireflow Chandelier 64
Break Plus 252	Halo Jewel 168	Plusminus Solo 416	Wireflow Free 58
Brisa 266	I.Cono 68	Puck 306	Wireflow Lineal 54
Circle 190	Jazz 94	Puck Wall Art 310	
Circus 10	June 280	Rhythm Horizontal 144	
Circus Solo 28	Knit 490	Rhythm Vertical 149	Item coding 8
Class 184	Kontorno 424	Set 498	Light source 505
Cosmos 174	Lily 344	Skan 40	Glossary 506
Dama 186	Line 200	Slim 84	Lighting control systems 507
Dots 268	Match 502	Spa 372	
Dots Glass 272	Mayfair 320	Sticks 466	

Item coding

Some pendant models offer different electrical connection typology, these will require additional coding.

Reference

1160

10

/

1

A

_

18

Model

Finish

LED Colour Temperature

Control

Electrical connection

4 digits

2 digits

1 digit

1 digit

2 digits

0 Without LED

1 2700 K

2 3000 K

3 3500 K

4 4000 K

7 2200 K

8 Tunable White

9 Tunable Red

A Infinite Colour (TW + RGB)

F Dim-To-Warm

0 On/ Off

1 DALI-2

2 0-10V

3 1-10V

4 TRIAC

5 Push

6 Sensor

7 Lutron

8 Push 2

A Push; 1-10V; DALI-2

B Push; 1-10V

C 1-10V; DALI-2

D Push; DALI-2

E Casambi PTP; On/ Off

F Simultaneous line Push 1-10V; DALI-2; Casambi

G DALI; Casambi; ProtoPixel

H On/ Off; DALI-2; Casambi

M Without driver

W Wiz

Y ProtoPixel

Z Casambi *

1 Surface

2 Built-in

3 Remote

4 Bolt-down

T Track

0 Basic

1 Micro

2 XXS

3 XS

4 S

5 M

6 L

8 Free Wire

9 Mud kit

A Trim

B Trimless

X Track Surface

Z Track Trimless

* Casambi refers to wireless dimming solutions. Ask for more information.

Should you need a non-standard product.
Please, request sales conditions.




Circus

Design by Antoni Arola

Circus is defined by its minimalist structure and signature conductive bar, delicately balanced by opposing elements to create a festival of light. A creative toolkit full of possibilities to explore and enjoy that offers total freedom of composition, multiple components and a myriad of diffuse and accented lighting effects.

Pendant Ceiling - Volumetric Diffuser

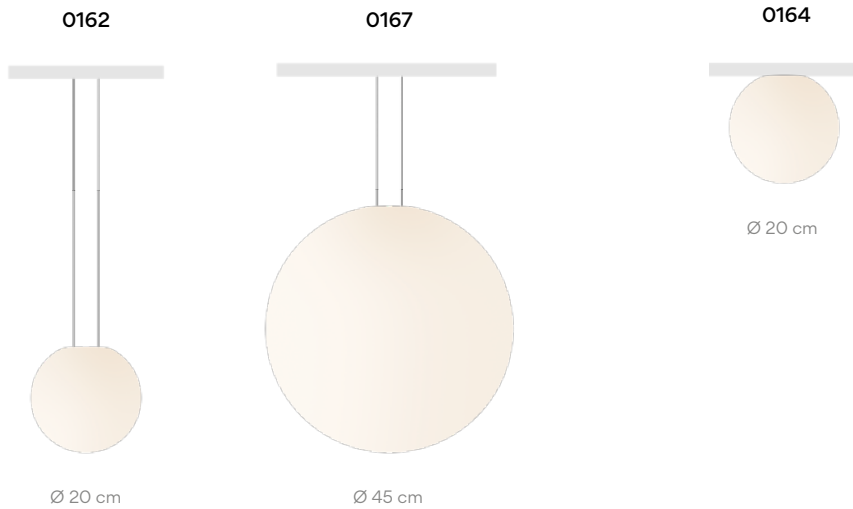

0162

- Finishes**
- 11/ _ _ Black (NCS S 8500-N)
 - 24/ _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 759 lm

F >

/2 _ 3000 K - 794 lm

/3 _ 3500 K - 822 lm

E >

Tunable White

/8 _ (1800 K - 4000 K)

452 lm - 709 lm

Tunable Red

/9 _ (Red - 2700 K)

172 lm - 468 lm

F >

CRI >90

Control

0162 _ _ / _ _

- _ _ / _ 1 Static White + DALI-2 (P2P)
- _ _ / _ Z Static White + Casambi (P2P)
- _ _ / 8Z Tunable White + Casambi (P2P)
- _ _ / 9Z Tunable Red + Casambi (P2P)

Materials

Sphere: PE- Polyethylene.
Top cover: Aluminum. Track adapter: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 6,7 W 400 mA

Tunable White:

1 x LED 6,7 W 385 mA

Tunable Red:

1 x LED PLATE 7,7 W 400 mA

Packaging

1 Box 0,26 x 0,26 x 0,26 m

Vol 0,0175 m³

Gross weight 1,16 Kg Net weight 0,53 Kg

Notes

Extra cable length.

LED > IP20 CE UK ENE >

0164

Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	Static White /1 _ 2700 K - 759 lm F /2 _ 3000 K - 794 lm /3 _ 3500 K - 822 lm E Tunable White /8 _ (1800 K - 4 000 K) 452 lm - 709 lm Tunable Red /9 _ (Red - 2700 K) 172 lm - 468 lm F CRI >90	0164 _ _ / _ _ _ _ / _ 1 Static White + DALI-2 (P2P) _ _ / _ Z Static White + Casambi (P2P) _ _ / 8Z Tunable White + Casambi (P2P) _ _ / 9Z Tunable Red + Casambi (P2P)

Materials

Sphere: PE- Polyethylene. Top cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 6,7 W 400 mA

Tunable White:

1 x LED 6,7 W 385 mA

Tunable Red:

1 x LED PLATE 7,7 W 400 mA

Packaging

1 Box 0,26 x 0,26 x 0,26 m

Vol 0,0175 m³

Gross weight 1,16 Kg Net weight 0,53 Kg

LED IP20 CE UK ENE

0167

Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	Static White /1 _ 2700 K - 2588 lm /2 _ 3000 K - 2706 lm /3 _ 3500 K - 2804 lm Tunable White /8 _ (1800 K - 4000 K) 1403 lm - 2615 lm E Tunable Red /9 _ (Red - 2700 K) 339 lm - 1582 lm F CRI >90	0167 _ _ / _ _ _ _ / _ 1 Static White + DALI-2 (P2P) _ _ / _ Z Static White + Casambi (P2P) _ _ / 8Z Tunable White + Casambi (P2P) _ _ / 9Z Tunable Red + Casambi (P2P)

Materials

Sphere: PE- Polyethylene. Top cover: Aluminum.
Track adapter: PC- Polycarbonate .

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 19,6 W 600 mA

Casambi:

1 x LED 15,7 W 485 mA

Tunable White:

1 x LED 17,7 W 525 mA

Tunable Red:

1 x LED PLATE 15,7 W 500 mA

Packaging

1 Box 0,55 x 0,55 x 0,65 m

Vol 0,1966 m³

Gross weight 4,6 Kg Net weight 2,35 Kg

Notes

Static White + Casambi -18% Flux.

Extra cable length.

LED IP20 CE UK ENE

Pendant Ceiling - Hidden Diffuser



0155	Finishes		LED Colour Temperature	Control
	● 11/ _ _ Black (NCS S 8500-N)	Static White /1 _ 2700 K - 1763 lm /2 _ 3000 K - 1843 lm E /3 _ 3500 K - 1910 lm D Tunable White /8 _ (1800 K - 4000 K) 1340 lm - 2501 lm D Tunable Red /9 _ (Red - 2700 K) 339,6 lm - 1582 lm F CRI >90		
	● 24/ _ _ Beige M1 (NCS S 2005-Y50R)			
		0155 _ _ / _ _		
		_ _ / _ 1 Static White + DALI-2 (P2P)		
		_ _ / _ Z Static White + Casambi (P2P)		
		_ _ / 8Z Tunable White + Casambi (P2P)		
		_ _ / 9Z Tunable Red + Casambi (P2P)		

O157

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 1763 lm

/2 _ 3000 K - 1843 lm

E >

/3 _ 3500 K - 1910 lm

D >

Tunable White

/8 _ (1800 K - 4000 K)
1340 lm - 2501 lm

D >

Tunable Red

/9 _ (Red - 2700 K)
339,6 lm - 1582 lm

F >

CRI >90

Control

O157 _ _ / _ _

- _ _ / _ 1 Static White + DALI-2 (P2P)
- _ _ / _ Z Static White +
Casambi (P2P)
- _ _ / 8Z Tunable White +
Casambi (P2P)
- _ _ / 9Z Tunable Red +
Casambi (P2P)

Materials

Shade: Aluminum. Top cover: PC- Polycarbonate.
Diffuser: PC- Polycarbonate.
Track adapter: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 12,8 W 400 mA

Tunable White:
1 x LED 16,8 W 500 mA


Tunable Red:
1 x LED 15,7 W 500 mA

Packaging

1 Box 0,480 x 0,480 x 0,115 m
Vol 0,0265 m³
Gross weight 2,5 Kg Net weight 0,92 Kg

LED > IP20 CE UK ENE >

Pendant Ceiling - Accent Spotlight

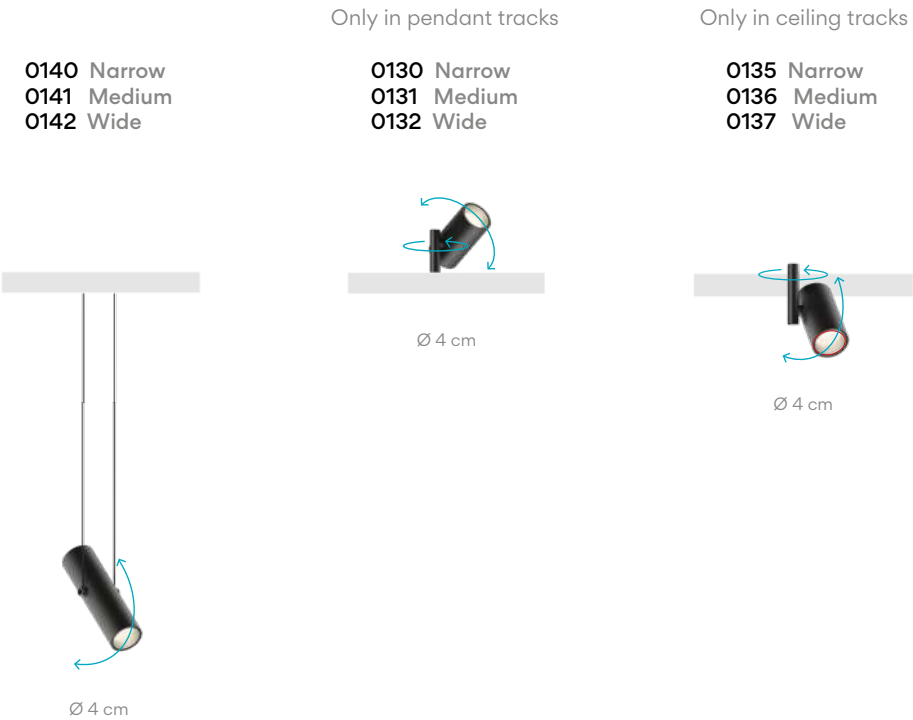

O141 Medium

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

Tunable Red
/F _ (Red - 2700 K)
147 lm - 535 lm

G

CRI >90

Control

O141 _ _ / _ _

_ _ / _ 1 Static White + DALI-2 (P2P)

_ _ / _ Z Static White +
Casambi (P2P)

_ _ / 8Z Tunable White +
Casambi (P2P)

_ _ / 9Z Tunable Red +
Casambi (P2P)

Materials

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA

Tunable White:
1 x LED 5,5 W 150 mA

Tunable Red:
1 x LED PLATE 7 W 460 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,89 Kg Net weight 0,59 Kg

Notes

Extra cable length.

LED IP20 CE UK ENE

O142 Wide

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

O142 _ _ / _ _

_ _ / _ 1 Static White + DALI-2 (P2P)

_ _ / _ Z Static White +
Casambi (P2P)

_ _ / 8Z Tunable White +
Casambi (P2P)

Materials

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA

Tunable White:
1 x LED 5,5 W 150 mA


Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,89 Kg Net weight 0,59 Kg

Notes

Extra cable length.

LED IP20 CE UK ENE

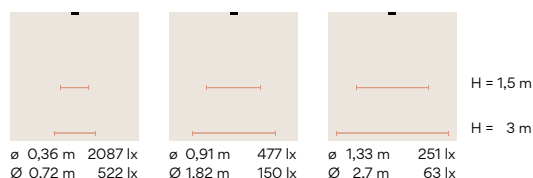

0130 Narrow	0130 Narrow		
0131 Medium	Finishes	LED Colour Temperature	Control
0132 Wide	11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K - 680 lm	0130 _ _ / _ _
	24/ _ _ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 711 lm	
		/3 _ 3500 K - 737 lm	_ _ / _ 1 Static White + DALI-2 (P2P)
		F	_ _ / _ Z Static White + Casambi (P2P)
		CRI >90	
	Materials	Packaging	
	Body: Aluminum. Snoot and cover: PC- Polycarbonate.	1 Box 0,15 x 0,15 x 0,075 m	
	Track adapter: PC- Polycarbonate. Lens: PMMA.	Vol 0,0017 m³	
	Light Source and electronics	Gross weight 0,44 Kg Net weight 0,14 Kg	
	1 x LED 7,2 W 400 mA	LED IP20 CE UK ETL	



0131 Medium

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 24/  Beige M1 (NCS S 2005-Y50R)	Static White /1 2700 K - 680 lm /2 3000 K - 711 lm /3 3500 K - 737 lm Tunable White /8 (1800 K - 4000 K) 308 lm - 504 lm  Tunable Red /9 (Red - 2700 K) 147 lm - 535 lm  CRI >90	0131       Static White + DALI-2 (P2P)   Static White + Casambi (P2P)   Tunable White + Casambi (P2P)   Tunable Red + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA

Tunable White:
1 x LED 5,5 W 150 mA

Tunable Red:
1 x LED PLATE 7W 460mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

0132 Wide

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 24/  Beige M1 (NCS S 2005-Y50R)	Static White /1 2700 K - 680 lm /2 3000 K - 711 lm /3 3500 K - 737 lm Tunable White /8 (1800 K - 4000 K) 308 lm - 504 lm  CRI >90	0132       Static White + DALI-2 (P2P)   Static White + Casambi (P2P)   Tunable White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics


2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA

Tunable White:
1 x LED 5,5 W 150 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

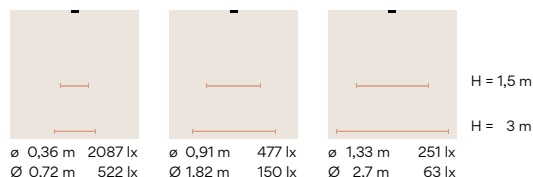

0135 Narrow 0136 Medium 0137 Wide	0135 Narrow Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R) LED Colour Temperature /1 _ 2700 K - 680 lm /2 _ 3000 K - 711 lm /3 _ 3500 K - 737 lm F CRI >90 Control 0135 _ _ / _ _ _ _ / _ 1 Static White + DALI-2 (P2P) _ _ / _ Z Static White + Casambi (P2P)
	Materials Body: Aluminum. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA. Light Source and electronics 1 x LED 7,2 W 400 mA Packaging 1 Box 0,15 x 0,15 x 0,075 m Vol 0,0017 m³ Gross weight 0,44 Kg Net weight 0,14 Kg LED IP20 CE UK EAC
	0136 Medium Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R) LED Colour Temperature Static White /1 _ 2700 K - 680 lm /2 _ 3000 K - 711 lm /3 _ 3500 K - 737 lm Tunable White /8 _ (1800 K - 4000 K) 308 lm - 504 lm F Tunable Red /9 _ (Red - 2700 K) 147 lm - 535 lm G CRI >90 Control 0136 _ _ / _ _ _ _ / _ 1 Static White + DALI-2 (P2P) _ _ / _ Z Static White + Casambi (P2P) _ _ / 8Z Tunable White + Casambi (P2P) _ _ / 9Z Tunable Red + Casambi (P2P)
	Materials Body: Aluminum. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED 7,2 W 400 mA Tunable White: 1 x LED 5,5 W 150 mA Tunable Red: 1 x LED 7 W 460mA Packaging 1 Box 0,15 x 0,15 x 0,075 m Vol 0,0017 m³ Gross weight 0,44 Kg Net weight 0,14 Kg LED IP20 CE UK EAC

0137 Wide

Finishes
 ● **11/** _ _ Black
 (NCS S 8500-N)
 ● **24/** _ _ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
 /1 _ 2700 K - 680 lm
 /2 _ 3000 K - 711 lm
 /3 _ 3500 K - 737 lm

Tunable White
 /8 _ (1800 K - 4000 K)
 308 lm - 504 lm

☐

CRI >90

Control

0137 _ _ / _ _

_ _ / _ 1 Static White + DALI-2 (P2P)

_ _ / _ Z Static White +
Casambi (P2P)

_ _ / 8Z Tunable White +
Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
 Track adapter: PC- Polycarbonate. Lens: PMMA.

Packaging




1 Box 0,15 x 0,15 x 0,075 m
 Vol 0,0017 m³
 Gross weight 0,44 Kg Net weight 0,14 Kg

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED 7,2 W 400 mA

Tunable White:
 1 x LED 5,5 W 150 mA

LED IP20 CE UK ENEC

			H = 1,5 m
ø 0,36 m 2087 lx Ø 0,72 m 522 lx	ø 0,91 m 477 lx Ø 1,82 m 150 lx	ø 1,33 m 251 lx Ø 2,7 m 63 lx	H = 3 m



Pendant Ceiling - Accent Downlight

0151 Narrow
0152 Medium
0153 Wide



0151
Narrow
0152
Medium
0153
Wide

0151 Narrow

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm



CRI >90

Control

0151 _ _ / _ _
_ _ / _ 1 Static White + DALI-2 (P2P)
_ _ / _ Z Static White +
Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

1 x LED 7,2 W 400 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,41 Kg Net weight 0,11 Kg



0152 Medium

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 24/  Beige M1 (NCS S 2005-Y50R)	Static White /1 2700 K - 680 lm /2 3000 K - 711 lm /3 3500 K - 737 lm Tunable White /8 (1800 K - 4000 K) 308 lm - 504 lm  Tunable Red /9 (Red - 2700 K) 147 lm - 535 lm  CRI >90	0152    
		1 Static White + DALI-2 (P2P) Z Static White + Casambi (P2P) 8Z Tunable White + Casambi (P2P) 9Z Tunable Red + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA
Tunable Red:
1 x LED PLATE 7 W 460mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,41 Kg Net weight 0,11 Kg

LED  IP20    

0153 Wide

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 24/  Beige M1 (NCS S 2005-Y50R)	Static White /1 2700 K - 680 lm /2 3000 K - 711 lm /3 3500 K - 737 lm Tunable White /8 (1800 K - 4000 K) 308 lm - 504 lm  CRI >90	0153   
		1 Static White + DALI-2 (P2P) Z Static White + Casambi (P2P) 8Z Tunable White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.


Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA


Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,41 Kg Net weight 0,11 Kg

LED  IP20    

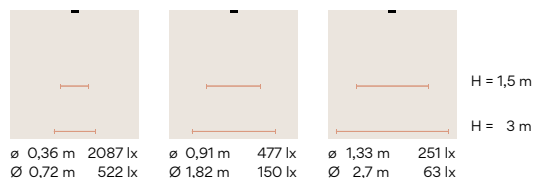


Pendant Ceiling - Light Reflector

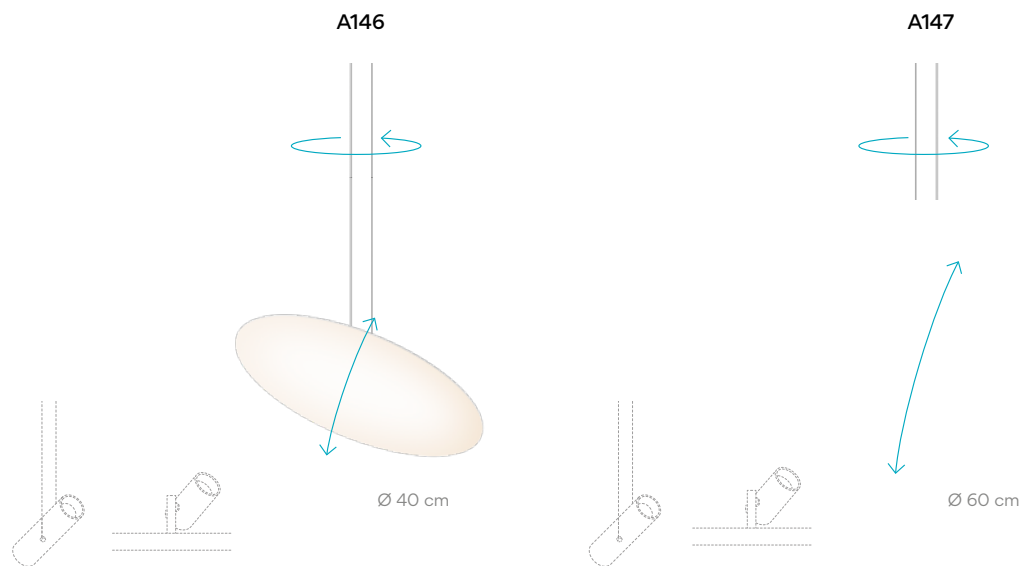

A146	Finishes	Control
	● 11/ _ _ Black (NCS S 8500-N)	A146 11 / OM
	Materials	Packaging
	Body: Aluminum.	1 Box 0,48 x 0,48 x 0,12 m Vol 0,00276 m³ Gross weight 1,5 Kg Net weight 0,74 Kg
A147	Finishes	Control
	● 11/ _ _ Black (NCS S 8500-N)	A147 11 / OM
	Materials	Packaging
	Body: Aluminum.	1 Box 0,68 x 0,68 x 0,12 m Vol 0,00555 m³ Gross weight 2,5 Kg Net weight 1,56 Kg

Select your model at vibia.com and adjust

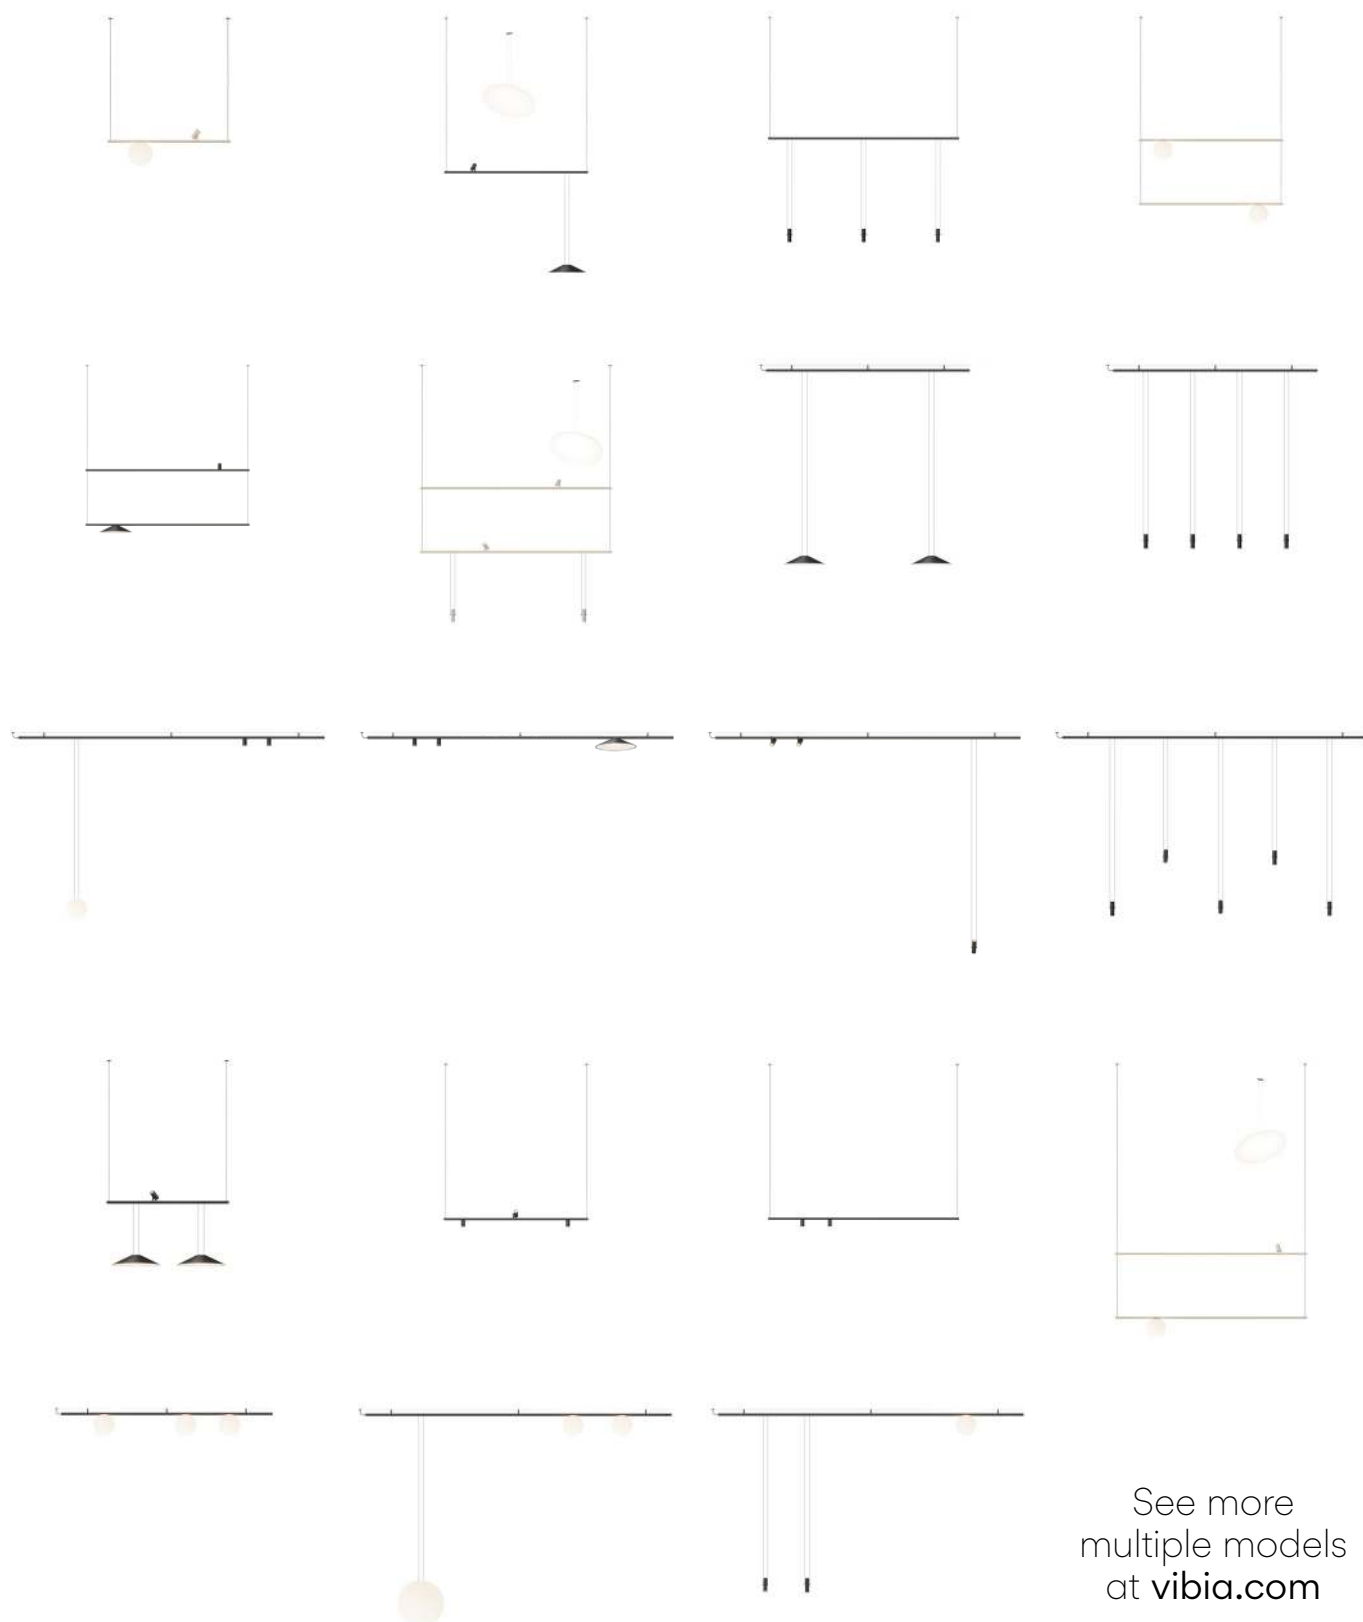

See more
multiple models
at vibia.com

Tracks

Ceiling Tracks

A352 210 cm



A355 300 cm



Ceiling Tracks 210 cm

A352 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

Ceiling Tracks 300 cm

A355 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

Finishes		Packaging A352	Packaging A355
● 11/ OM	Black (NCS S 8500-N)	1 Box	1 Box
● 24/ OM	Beige M1 (NCS S 2005-Y50R)	0,125 x 0,125 x 2,25 m	0,125 x 0,125 x 3,25 m
Surface Materials		Vol 0,0351 m³	Vol 0,0508 m³
Track: Aluminum. Top cover: PVC.		Gross weight 3,87 Kg	Gross weight 5,42 Kg
		Net weight 1,62 Kg	Net weight 2,17 Kg
IP20 CE UK EN 6			

Accessories included with the Ceiling tracks

⚡ Select Eletrical connection



Built-in Remote



Surface	Built-in XS	Remote Micro
Ø 6,5 cm	25 x 3 x 2 cm	25 x 3 x 2 cm
33 x 6 cm		

Pendant Single Tracks

A358 (H 3m)
A359 (H 9m)

110 cm



Height 3 m 110 cm

A358 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

Height 9 m 110 cm

A359 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

A364 (H 3m)
A365 (H 9m)

150 cm



Height 3 m 150 cm

A364 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

Height 9 m 150 cm

A365 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

A370 (H 3m)
A371 (H 9m)

200 cm



Height 3 m 200 cm

A370 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

Height 9 m 200 cm

A371 __ / OM __

__ / OM 10

__ / OM 23

__ / OM 31

Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
Top cover: PVC.
Ceiling supports: PC- Polycarbonate.



Packaging A358 - A359

1 Box
0,125 x 0,125 x 1,25 m
Vol 0,0195 m³
Gross weight 2,34 kg
Net weight 1,09 kg

Packaging A364 - A365

1 Box
0,125 x 0,125 x 1,6 m
Vol 0,025 m³
Gross weight 2,94 Kg
Net weight 1,34 Kg

Packaging A370 - A371

1 Box
0,125 x 0,125 x 2,25 m
Vol 0,0351 m³
Gross weight 3,89 Kg
Net weight 1,64 Kg

Accessories included with the Ceiling tracks

⚡ Select Eletrical connection



Surface

Built-in

Remote



Surface
Ø 6,5 cm
33 x 6 cm

Built-in XS
25 x 3 x 2 cm

Remote Micro
25 x 3 x 2 cm

Counterweight

Only for pendant track.
1 counterweight required for 3 or 4 spots
and 2 counterweights required for 5 spots.

A160 __ / OM


Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

Pendant Double Tracks

A376 (H 3m)
A377 (H 9m)

110 cm

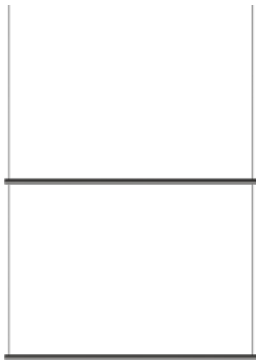

Height 3 m 110 cm

A376 __ / OM __
__ / OM 10
__ / OM 23
__ / OM 31

Height 9 m 110 cm

A377 __ / OM __
__ / OM 10
__ / OM 23
__ / OM 31

A382 (H 3m)
A383 (H 9m)

150 cm



Height 3 m 150 cm

A382 __ / OM __
__ / OM 10
__ / OM 23
__ / OM 31

Height 9 m 150 cm

A383 __ / OM __
__ / OM 10
__ / OM 23
__ / OM 31

A388 (H 3m)
A389 (H 9m)

200 cm



Height 3 m 200 cm

A388 __ / OM __
__ / OM 10
__ / OM 23
__ / OM 31

Height 9 m 200 cm

A389 __ / OM __
__ / OM 10
__ / OM 23
__ / OM 31

Finishes			
● 11/ OM Black (NCS S 8500-N)			
● 24/ OM Beige M1 (NCS S 2005-Y50R)			
Materials			
Track: Aluminum.			
Top cover: PVC.			
Ceiling supports: PC- Polycarbonate.			
Packaging A376 - A377		Packaging A382 - A383	Packaging A388 - A389
1 Box		1 Box	1 Box
0,125 x 0,125 x 1,25 m		0,125 x 0,125 x 1,6 m	0,125 x 0,125 x 2,25 m
Vol 0,0195 m³		Vol 0,025 m³	Vol 0,0351 m³
Gross weight 3,34 Kg		Gross weight 4,09 Kg	Gross weight 5,49 Kg
Net weight 1,99 Kg		Net weight 2,49 Kg	Net weight 3,09 Kg

Accessories included with the Ceiling tracks

⚡ Select Eletrical connection

Surface	Built-in	Remote	Surface	Built-in XS	Remote Micro
			Ø 6,5 cm 33 x 6 cm	25 x 3 x 2 cm	25 x 3 x 2 cm

Counterweight
Only for pendant track.
1 counterweight required for 3 or 4 spots
and 2 counterweights required for 5 spots.

A160 __ / OM
Finishes
● 11/ OM Black (NCS S 8500-N)
● 24/ OM Beige M1 (NCS S 2005-Y50R)

Electrical connection options

Driver for pendant

Control

A394 _ _ / _ _ _ _ _

_ _ / OG _ 10 30W + DALI-2 (P2P), Casambi (P2P), + Surface

80 / OG _ 23 30W + DALI-2 (P2P), Casambi (P2P), + Built-in XS

80 / OG _ 31 30W + DALI-2 (P2P), Casambi (P2P), + Remote Micro

_ _ / OZ _ 10 30W + Casambi Simultaneous line + Surface

80 / OZ _ 23 30W + Casambi Simultaneous line + Built-in XS

80 / OZ _ 31 30W + Casambi Simultaneous line + Remote Micro

A395 _ _ / _ _ _ _ _

_ _ / OG _ 10 48W + DALI-2 (P2P), Casambi (P2P), + Surface

80 / OG _ 23 48W + DALI-2 (P2P), Casambi (P2P), + Built-in XS

80 / OG _ 31 48W + DALI-2 (P2P), Casambi (P2P), + Remote Micro

_ _ / OZ _ 10 48W + Casambi Simultaneous line + Surface

80 / OZ _ 23 48W + Casambi Simultaneous line + Built-in XS

80 / OZ _ 31 48W + Casambi Simultaneous line + Remote Micro

A396 _ _ / _ _ _ _ _

_ _ / OG _ 10 84W + DALI-2 (P2P), Casambi (P2P), + Surface

80 / OG _ 23 84W + DALI-2 (P2P), Casambi (P2P), + Built-in XS

80 / OG _ 31 84W + DALI-2 (P2P), Casambi (P2P), + Remote Micro

_ _ / OZ _ 10 84W + Casambi Simultaneous line + Surface

80 / OZ _ 23 84W + Casambi Simultaneous line + Built-in XS

80 / OZ _ 31 84W + Casambi Simultaneous line + Remote Micro

Driver for ceiling

Control

A397 _ _ / _ _ _ _ _

_ _ / OG _ 10 30W + DALI-2 (P2P), Casambi (P2P), + Surface

80 / OG _ 23 30W + DALI-2 (P2P), Casambi (P2P), + Built-in XS

80 / OG _ 31 30W + DALI-2 (P2P), Casambi (P2P), + Remote Micro

_ _ / OZ _ 10 30W + Casambi Simultaneous line + Surface

80 / OZ _ 23 30W + Casambi Simultaneous line + Built-in XS

80 / OZ _ 31 30W + Casambi Simultaneous line + Remote Micro

A398 _ _ / _ _ _ _ _

_ _ / OG _ 10 48W + DALI-2 (P2P), Casambi (P2P), + Surface

80 / OG _ 23 48W + DALI-2 (P2P), Casambi (P2P), + Built-in XS

80 / OG _ 31 48W + DALI-2 (P2P), Casambi (P2P), + Remote Micro

_ _ / OZ _ 10 48W + Casambi Simultaneous line + Surface

80 / OZ _ 23 48W + Casambi Simultaneous line + Built-in XS

80 / OZ _ 31 48W + Casambi Simultaneous line + Remote Micro

A399 _ _ / _ _ _ _ _

_ _ / OG _ 10 84W + DALI-2 (P2P), Casambi (P2P), + Surface

80 / OG _ 23 84W + DALI-2 (P2P), Casambi (P2P), + Built-in XS

80 / OG _ 31 84W + DALI-2 (P2P), Casambi (P2P), + Remote Micro

_ _ / OZ _ 10 84W + Casambi Simultaneous line + Surface

80 / OZ _ 23 84W + Casambi Simultaneous line + Built-in XS

80 / OZ _ 31 84W + Casambi Simultaneous line + Remote Micro

Finishes

- 11/ O _ Black (NCS S 8500-N)
- 24/ O _ Beige M1 (NCS S 2005-Y50R)
- 80/ O _ Without finish for Built-in and Remote.

Materiales

Aluminum + PC-Polycarbonate.
(Surface version only)



Electrical connection

Driver Constant Voltage 48V
220~240V 50/60Hz
Casambi Simultaneous line **Bi-volt**

Packaging

1 Box 0,12 x 0,10 x 0,37 m
Vol 0,0044 m³
Gross weight 0,95 Kg Net weight 0,53 Kg

Included tracks electrical connections

Select Eletrical connection




Pendant

Ceiling
Pendant

Built-in

Remote

9 m electrical cable included



Ceiling

Surface
Ø 6,5 cm
33 x 6 cm

Pendant

Surface
Ø 6,5 cm
33 x 6 cm

Ceiling
Pendant

Built-in XS
25 x 3 x 2 cm

Ceiling
Pendant

Remote Micro
25 x 3 x 2 cm

Circus Solo

Design by Antoni Arola

The Circus system incorporates a range of independent elements that can be surface mounted to the ceiling, including spots, downlights and general lighting fixtures. This line allows professionals to create harmonic compositions and subtle atmospheres that break with the standards.


Pendant - Volumetric Diffuser

0185



Ø 20 cm

0187

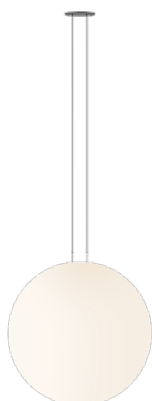

Ø 45 cm

0193



Ø 20 cm

150 cm

0185

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 759 lm

[F] >

/2 _ 3000 K - 794 lm

/3 _ 3500 K - 822 lm

[E] >

Tunable White

/8 _ (1800 K - 4000 K)

452 lm - 709 lm

Tunable Red

/9 _ (Red - 2700 K)

172 lm - 468 lm

[F] >

CRI >90

Control

0185 _ _ / _ _

_ _ / _ D Static White +
Push, DALI-2

_ _ / _ Z Static White +
Casambi

_ _ / 8Z Tunable White +
Casambi

_ _ / 9Z Tunable Red +
Casambi



Select Electrical connection



Surface



Built-in XS

Materials

Sphere: PE- Polyethylene. Top cover: Aluminum.

Canopy (Surface): Aluminum.

Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 6,7 W 400 mA

Constant Current 400 mA

220~240V 50/60Hz

Tunable White:

1 x LED 6,7 W 385 mA

Constant Voltage 48V

220~240V 50/60Hz

Tunable Red:

1 x LED PLATE 7,7 W 400 mA

Constant Voltage 48V

220~240V 50/60Hz

Packaging

1 Box 0,32 x 0,32 x 0,5 m

Vol 0,0512 m³

Gross weight 1,96 Kg Net weight 1,03 Kg

Notes

0185 _ _ / _ 8Z: Tunable White + Casambi **Multi-volt**

0185 _ _ / _ 9Z: Tunable Red + Casambi **Multi-volt**

Extra cable length.

Surface

LED [] IP20 CE UK ENEC


Built-in

LED [] IP20 CE UK ENEC



0187		Finishes 11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature Static White /1 _ 2700 K - 2588 lm /2 _ 3000 K - 2706 lm /3 _ 3500 K - 2804 lm Tunable White /8 _ (1800 K - 4000 K) 1403 lm - 2615 lm E Tunable Red /9 _ (Red - 2700 K) 339 lm - 1582 lm F CRI >90	Control 0187 _ _ / _ _ _ _ / _ D Static White + Push, DALI-2 _ _ / _ Z Static White + Casambi _ _ / 8Z Tunable White + Casambi _ _ / 9Z Tunable Red + Casambi


 Select Eletrical connection



Materials Sphere: PE- Polyethylene. Top cover: Aluminum. Canopy (Surface): Aluminum. Canopy (Built-in): ABS + PC- Polycarbonate.	Packaging 1 Box 0,55 x 0,55 x 0,65 m Vol 0,1966 m³ Gross weight 5,1 Kg Net weight 2,85 Kg
Light Source and electronics 2700 K - 3000 K- 3500K: 1 x LED 19,6 W 600 mA Constant Current 600 mA 220~240V 50/60Hz Tunable White: 1 x LED 17,7 W 525 mA Constant Voltage 48V 220~240V 50/60Hz Tunable Red: 1 x LED PLATE 15,7 W 500 mA Constant Voltage 48V 220~240V 50/60Hz	Notes 0187 _ _ / _ 8Z: Tunable White + Casambi Multi-volt 0187 _ _ / _ 9Z: Tunable Red + Casambi Multi-volt Extra cable length. Surface LED IP20 CE UK ErC Built-in LED IP20 CE UK ErC


0193		Finishes 11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature /1 _ 2700 K - 1518 lm F /2 _ 3000 K - 1588 lm /3 _ 3500 K - 1644 lm E CRI >90	Control 0193 _ _ / _ _ _ _ / _ D Static White + Push, DALI-2 _ _ / _ Z Static White + Casambi

 Select Eletrical connection



Materials Sphere: PE- Polyethylene. Top cover: Aluminum. Structure: Aluminum. Canopy (Surface): Aluminum + Polycarbonate. Canopy (Built-in): ABS + PC- Polycarbonate.	Packaging 1 Box 1,82 x 0,30 x 0,30 m Vol 0,164 m³ Gross weight 3,5 Kg Net weight 2,22 Kg
Light Source and electronics 2 x LED 6,7 W 400 mA Constant Current 400 mA 220~240V 50/60Hz	Notes Extra cable length. LED IP20 CE UK ErC

Pendant - Hidden Diffuser (Screened)

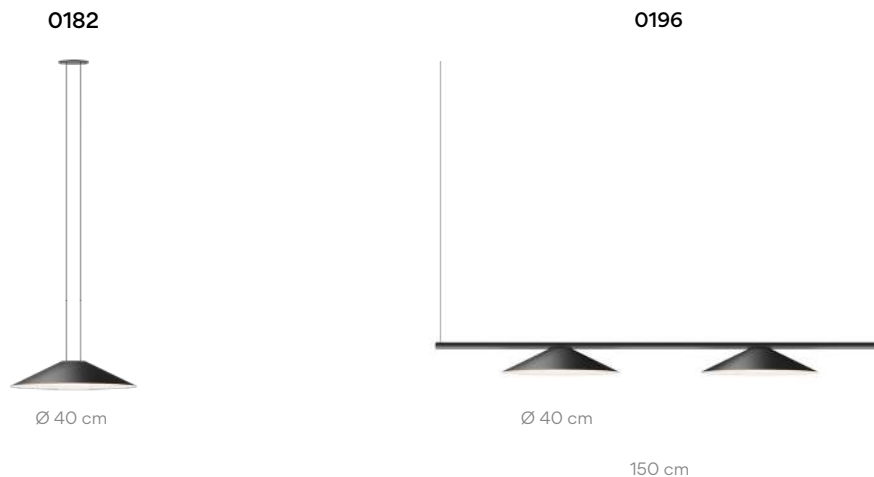

0182

- Finishes**
- 11/ _ _ Black
(NCS S 8500-N)
 - 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 1763 lm

/2 _ 3000 K - 1843 lm

/3 _ 3500 K - 1910 lm

Tunable White

/8 _ (1800 K - 4000 K)
1340 lm - 2501 lm

Tunable Red

/9 _ (Red - 2700 K)
339,6 lm - 1582 lm

CRI >90

Control

0182 _ _ / _ _

- _ _ / _ D Static White +
Push, DALI-2
- _ _ / _ Z Static White +
Casambi
- _ _ / 8Z Tunable White +
Casambi
- _ _ / 9Z Tunable Red +
Casambi

Select Electrical connection



Surface Built-in XS

Materials

Shade: Aluminum. Top cover: Aluminum.
Diffuser: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 12,8 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:

1 x LED 16,8 W 500 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:

1 x LED PLATE 15,7 W 500 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,480 x 0,480 x 0,115 m
Vol 0,0265 m³
Gross weight 3 Kg Net weight 1,42 Kg

Notes

0182 _ _ / _ 8Z: Tunable White + Casambi **Multi-volt**

0182 _ _ / _ 9Z: Tunable Red + Casambi **Multi-volt**

Extra cable length.

Surface

LED IP20 CE UK ENEC

Built-in XS

LED IP20 CE UK ENEC

0196		Finishes	LED Colour Temperature	Control
		 11/ __ Black (NCS S 8500-N)	/1 _ 2700 K - 3104 lm /2 _ 3000 K - 3244 lm	0196 __ / __
		 24/ __ Beige M1 (NCS S 2005-Y50R)	 /3 _ 3500 K - 3362 lm  CRI >90	__ / _ D Static White + Push, DALI-2 __ / _ Z Static White + Casambi
 Select Eletrical connection				
 Surface  Built-in XS  Remote Micro				
Materials Shade: Aluminum. Top cover: Aluminum. Diffuser: PC- Polycarbonate. Structure: Aluminum. Canopy (Surface): Aluminum + Polycarbonate. Canopy (Built-in): ABS + PC- Polycarbonate			Packaging 1 Box 1,60 x 0,48 x 0,13 m Vol 0,100 m³ Gross weight 5,60 Kg Net weight 3,10 Kg	
Light Source and electronics 2 x LED 11,1 W 350 mA Constant Current 700 mA 220~240V 50/60Hz			Notes Extra cable length.	
			     	



Pendant - Accent Spotlight

0176 Narrow
0177 Medium
0178 Wide



0176
Narrow
0177
Medium
0178
Wide



0176 Narrow

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- /1 _ 2700 K - 680 lm
- /2 _ 3000 K - 711 lm
- /3 _ 3500 K - 737 lm

F >

CRI >90

Control

0176 _ _ / _ _

_ _ / _ D Static White +
Push, DALI-2

_ _ / _ Z Static White +
Casambi

Select Electrical connection



Surface



Built-in XS

Materials

Body: Zinc Alloy.
Snoot and cover: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Packaging

1 Box 0,30 x 0,15 x 0,075 m
Vol 0,0034 m³
Gross weight 1,39 Kg Net weight 1,09 Kg

Notes

Extra cable length.

Surface

LED IP20 CE UK ENE

Built-in XS

LED IP20 CE UK ENE

0177 Medium

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
Tunable Red
/9 _ (Red - 2700 K)
147 lm - 535 lm
F
CRI >90

Control

0177 _ _ / _ _
_ _ / _ D Static White +
Push, DALI-2
_ _ / _ Z Static White +
Casambi
_ _ / 8Z Tunable White +
Casambi
_ _ / 9Z Tunable Red +
Casambi

Select Electrical connection



Surface Built-in XS

Materials

Body: Zinc Alloy.
Snoot and cover: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Packaging

1 Box 0,30 x 0,15 x 0,075 m
Vol 0,0034 m³
Gross weight 1,39 Kg Net weight 1,09 Kg

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:
1 x LED PLATE 7 W 460 mA
Constant Voltage 48V
220~240V 50/60Hz

Notes

0177 _ _ / _ 8Z: Tunable White + Casambi **Multi-volt**
0177 _ _ / _ 9Z: Tunable Red + Casambi **Multi-volt**
Extra cable length.

Surface

LED IP20 CE UK ENEC

Built-in XS

LED IP20 CE UK ENEC

0178 Wide

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control

0178 _ _ / _ _
_ _ / _ D Static White +
Push, DALI-2
_ _ / _ Z Static White +
Casambi
_ _ / 8Z Tunable White +
Casambi

Select Electrical connection



Surface Built-in XS

Materials

Body: Zinc Alloy.
Snoot and cover: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:

1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,30 x 0,15 x 0,075 m
Vol 0,0034 m³
Gross weight 1,39 Kg Net weight 1,09 Kg

Notes

0178 __ / __ 8Z: Tunable White + Casambi **Multi-volt**


Extra cable length.

Surface

LED IP20 CE UK ENE

Built-in XS

LED IP20 CE UK ENE

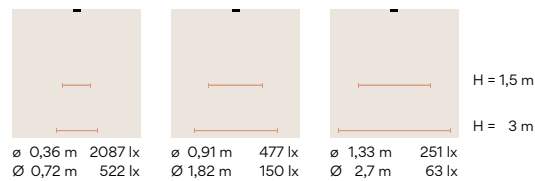

Ceiling - Accent Spotlight

0171 Narrow
0172 Medium
0173 Wide



0171 Narrow	0172 Medium	0173 Wide
BUILT-IN		
Select Electrical connection		
REMOTE		
Materials		
Packaging		
Notes		
LED		

0172 Medium

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

- /1 _ 2700 K - 680 lm
- /2 _ 3000 K - 711 lm
- /3 _ 3500 K - 737 lm

Tunable White

- /8 _ (1800 K - 4000 K)
- 308 lm - 504 lm

F

Tunable Red

- /9 _ (Red - 2700 K)
- 147 lm - 535 lm

G

CRI >90

Control

0172 _ _ / _ _

_ _ / _ _ O Static White +
On/Off

_ _ / _ _ D Static White +
Push, DALI-2

_ _ / _ _ M Static White +
Without driver

_ _ / _ _ Z Static White +
Casambi

_ _ / 8Z Tunable White +
Casambi

_ _ / 9Z Tunable Red +
Casambi

Select Electrical connection



Built-in XS



Remote
Micro

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Ceiling Base: Aluminum. Installation frame (Built-in): POM.
Installation frame (Remote): Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:

1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:

1 x LED PLATE 7 W 460 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,15 m
Vol 0,0038 m³
Gross weight 0,71 Kg Net weight 0,41 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point.

LED IP20 CE UK ENE

0173 Wide

Finishes

- 11/ _ _ Black

(NCS S 8500-N)
- 24/ _ _ Beige M1

(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

0173 _ _ / _ _
_ _ / _ **O** Static White +
+ On/Off
_ _ / _ **D** Static White +
Push, DALI-2
_ _ / _ **M** Static White +
Without driver
_ _ / _ **Z** Static White +
Casambi
_ _ / **8Z** Tunable White +
Casambi

Select Electrical connection



Built-in XS Remote
Micro

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Ceiling Base: Aluminum. Installation frame (Built-in): POM.
Installation frame (Remote): Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz
Tunable White:
1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz


Packaging

1 Box 0,15 x 0,15 x 0,15 m
Vol 0,0038 m³
Gross weight 0,71 Kg Net weight 0,41 Kg


Notes

Visit vibia.com to group several pieces with
just one electrical point.

LED IP20 CE UK ENEC

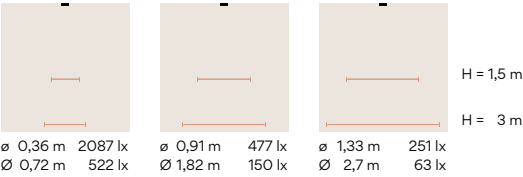

Light reflector- go to [page 22](#)

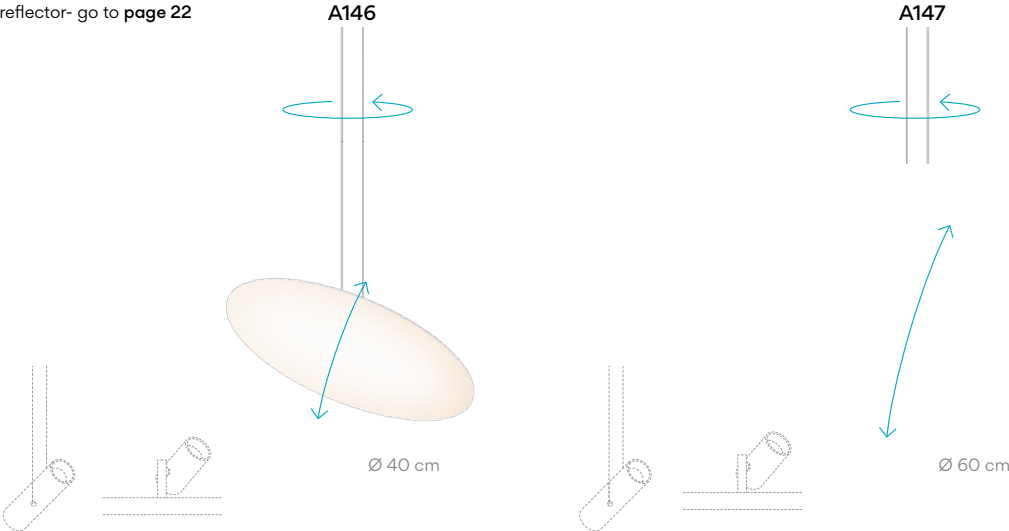

 Select Electrical connection

For Ref. 0176, 0177, 0178, 0182, 0185, 0187

Drop ceiling



Ø 8 cm
height 8,5 cm
match with
fixture finish.

Regular ceiling



Ø 6,5 cm
height 17 cm
match with
fixture finish.

For Ref. 0193, 0196

Drop ceiling



Ø 3 cm
height 7 cm
for plaster
ceilings.
Black finish.

Ø 8 cm
height 8,5 cm
match with
fixture finish.

Regular ceiling



Ø 6,5 cm
Length 33 cm
match with
fixture finish.

For Ref. 0171, 0172, 0173

Drop ceiling



Ø 3 cm
height 7 cm
for plaster
ceilings.
Black finish.



Ø 8,3 cm
height 8,5 cm
match with
fixture finish.

Remote

Built-in


Skán

Design by Lievore, Altherr, Molina

Skán is a sleek and unadorned fixture. It combines lean lines with soothing purity of form, adding a minimalist sensibility to any space.

1160	10	/1A
Model	Finish	Control
LED Colour Temperature		

Floor

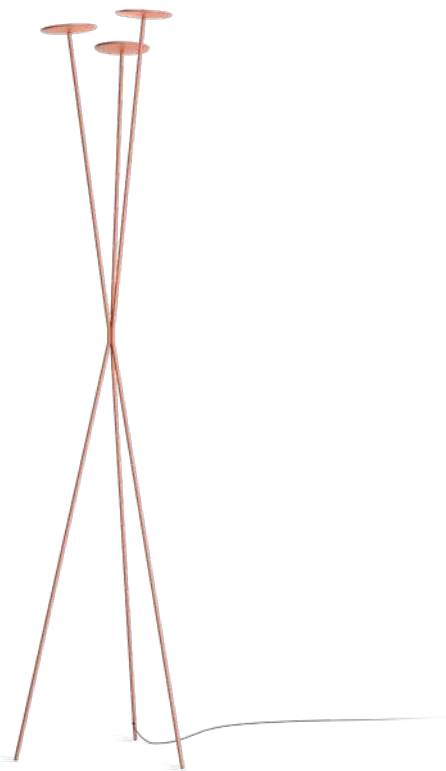

0260

43 x 37,5 x 198 cm

0260	Finishes  10/ _ _ White (NCS S 0300-N)  11/ _ _ Black (NCS S 8500-N)  37/ _ _ Terra Red (NCS S4040-Y70R) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 4430,16 lm C /2 _ 3000 K - 3792,73 lm E /3 _ 3500 K - 4799,9 lm D CRI >90	Control 0260 _ _ / _ 5 Push
	Materials Head: Aluminum. Diffuser: PMMA. Vertical tube: Steel. Light Source and electronics 3 x LED 9,2 W 500 mA Constant Current 500 mA 110~240V 50/60Hz	Packaging 1 Box 2,11 x 0,60 x 0,60 m Vol 0,7596 m³ Gross weight 5,4 Kg Net weight 2,5 Kg LED  IP20     Dimmer	



Pendant

0270







Ø 30 cm

0275



Ø 60 cm

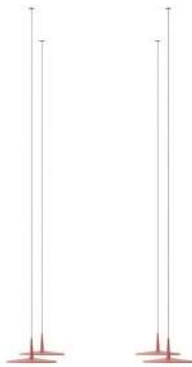

0270

- Finishes**
- 10/ _ _ White
(NCS S 0300-N)
 - 11/ _ _ Black
(NCS S 8500-N)
 - 24/ _ _ Beige M1
(NCS S 2005-Y50R)
 - 37/ _ _ Terra Red
(NCS S 4040-Y70R)
 - 42/ _ _ Blue M1
(NCS S 5010-B10G)
 - 47/ _ _ Green L1
(NCS S 4005-G80Y)

Finish customization

(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1 _ 2700 K - 1269 lm
CRI >90
 - /2 _ 3000 K - 1123 lm
CRI >80
 - /3 _ 3500 K - 1374 lm
CRI >90

Control

- 0270 _ _ / _ _
- _ _ / _ 1 DALI-2
 - _ _ / _ 2 0-10V
 - _ _ / _ B Push; 1-10V
 - _ _ / _ Z Casambi

Select Eletrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

Materials

Shade: Aluminum. Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging

1 Box 0,29 x 0,38 x 0,38 m
Vol 0,0418 m³
Gross weight 2,6 Kg Net weight 1,4 Kg

Notes

0270 _ _ / _ 1: DALI-2 **Bi-volt**
0270 _ _ / _ B: Push; 1-10V **Bi-volt**
Extra cable length.

LED IP20 CE UK ENEC

0275

- Finishes**
- 10/ _ _ White
(NCS S 0300-N)
 - 11/ _ _ Black
(NCS S 8500-N)
 - 24/ _ _ Beige M1
(NCS S 2005-Y50R)
 - 37/ _ _ Terra Red
(NCS S 4040-Y70R)
 - 42/ _ _ Blue M1
(NCS S 5010-B10G)
 - 47/ _ _ Green L1
(NCS S 4005-G80Y)

Finish customization

(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1 _ 2700 K - 1269 lm
CRI >90
 - /2 _ 3000 K - 1575 lm
CRI >80
 - /3 _ 3500 K - 1375 lm
CRI >90

Control

- 0275 _ _ / _ _
- _ _ / _ 1 DALI-2
 - _ _ / _ B Push; 1-10V
 - _ _ / _ Z Casambi

Select Eletrical connection



Surface Built-in XS Remote Micro Remote XXS

Materials

Body: Aluminum. Diffuser: PMMA.
Canopy Plate: Steel.

Light Source and electronics

1 x LED 13,9 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 0,42 x 0,71 x 0,66 m
Vol 0,2000 m³
Gross weight 7 Kg Net weight 4,4 Kg

Notes

Extra cable length.

LED IP20 CE UK ENEC


Select your model at vibia.com and adjust



2 x 0270



2 x 0270



3 x 0270



3 x 0270




4 x 0270



4 x 0270



5 x 0270




7 x 0270



8 x 0270




8 x 0270



9 x 0270




18 x 0270



16 x 0270



4 x 0270



8 x 0270



9 x 0270



9 x 0270



16 x 0270

See more
multiple models
at vibia.com

Finishes

- 10/ _ _ White
(NCS S 0300-N)
- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 37/ _ _ Terra Red
(NCS S4040-Y70R)
- 42/ _ _ Blue M1
(NCS S 5010-B10G)
- 47/ _ _ Green L1
(NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1 _ 2700 K
CRI >90
- /2 _ 3000 K
CRI >80
- /3 _ 3500 K
CRI >90

Control

Model _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ 2 0-10V
- _ _ / _ B Push; 1-10V
- _ _ / _ Z Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0270

Drop ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Match with
fixture finish.

Ø 8 cm
height 6 cm

match with
fixture finish.

Regular ceiling



Ø 17,3 cm

match with
fixture finish.

Ø 20 cm

you can choose the finish of the
canopy among black, white or any
colour matching one of the Pendant.

Ø 22 cm

Ø 36 cm

Ø 40 cm

For Ref. 0275

Drop ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Match with
fixture finish.

Ø 8 cm
height 6 cm

match with
fixture finish.

Regular ceiling



Ø 20 cm

match with
fixture finish.

you can choose the finish of the
canopy among black, white or any
colour matching one of the Pendant.

Remote

Built-in

Materials

Body: Aluminum. Diffuser: PMMA.
Canopy Plate: Steel.

Notes

Additional cable length
from 2 m.



0280

Finishes 10/ __ White (NCS S 0300-N) 11/ __ Black (NCS S 8500-N) 24/ __ Beige M1 (NCS S 2005-Y50R) 37/ __ Terra Red (NCS S 4040-Y70R) 42/ __ Blue M1 (NCS S 5010-B10G) 47/ __ Green L1 (NCS S 4005-G80Y) Finish customization (Available options: Vibia colour palette Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 3123 lm CRI >90 /2 _ 3000 K - 3369 lm CRI >80 /3 _ 3500 K - 4124,7 lm CRI >90 E	Control 0280 __ / __ __ / _ 1 DALI-2 __ / _ B Push; 1-10V __ / _ Z Casambi
Materials Body: Aluminum. Diffuser: PMMA . Canopy Plate: Steel. Light Source and electronics 3 x LED 9,3 W 350 mA Constant Current 350 mA 110-240V 50/60Hz	Packaging 2 Boxes Total Vol 0,2226 m³ Gross weight 13,7 Kg Net weight 9,2 Kg Notes Surface. Extra cable length. UNTIL STOCK RUNS OUT LED IP20 CE UK ErC	

0282

Finishes 10/ __ White (NCS S 0300-N) 11/ __ Black (NCS S 8500-N) 24/ __ Beige M1 (NCS S 2005-Y50R) 37/ __ Terra Red (NCS S 4040-Y70R) 42/ __ Blue M1 (NCS S 5010-B10G) 47/ __ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 5205 lm CRI >90 /2 _ 3000 K - 5615 lm CRI >80 /3 _ 3500 K - 6874,5 lm CRI >90 E	Control 0282 __ / __ __ / _ 1 DALI-2 __ / _ B Push; 1-10V __ / _ Z Casambi
Finish customization (Available options: Vibia colour palette Minimum quantity 10 units. Price + 10%)		

Materials Body: Aluminum. Diffuser: PMMA. Canopy Plate: Steel.	Packaging 2 Boxes Total Vol 0,3290 m³ Gross weight 36,9 Kg Net weight 29 Kg
Light Source and electronics 5 x LED 9,3 W 350mA Constant Current 350 mA 110-240V 50/60Hz	Notes Surface. Extra cable length.
	UNTIL STOCK RUNS OUT
	LED IP20 CE UK ErC




Wireflow


Design by Arik Levy

Crafted of black, electrical cables, Volumetric's airy, three-dimensional outline lends it the feeling of being at once present and absent. The geometric volumes are tipped with LED light terminals in a contemporary take on the traditional chandelier.


Pendant




0309
100 x 100 cm




0310
80 x 80 cm




0311
64 x 64 cm




0312
50 x 50 cm




0299
150 x 150 cm




0300
120 x 120 cm



0301
89 x 89 cm




0302
70 x 70 cm



0303
55 x 55 cm

Personalise your own
Wireflow composition
quick and easy at
vibia.com

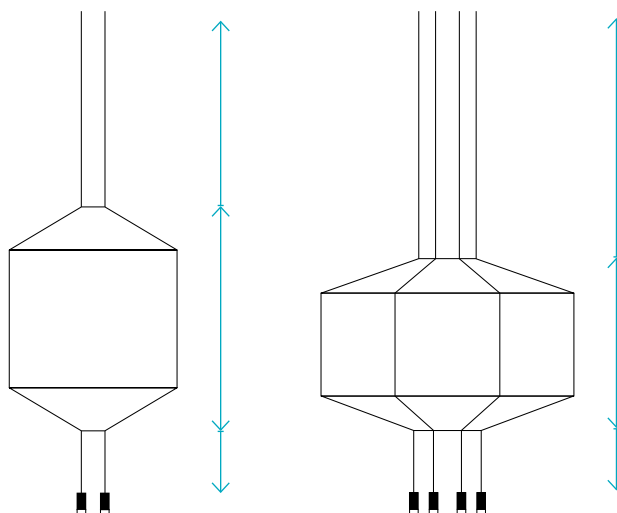

Pressed-glass diffuser.



0299

Finishes
● 04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 3880 lm
ID
/2 _ 3000 K - 3880 lm
/3 _ 3500 K - 4002,4 lm
IE
CRI >90

Control

0299 _ _ / _

_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3245 m³
Gross weight 20,6 Kg Net weight 9,6 Kg

Notes

0299 _ _ / _ A: Push; 1-10V; DALI-2 **Bi-volt**

Pressed-glass diffuser.

Configuration layout at vibia.com

Min. quantity, upcharge and extra lead time apply.

LED IP20 CE ENEC

0300	Finishes 04/ _ _ Black (RAL 9005)	LED Colour Temperature /1 _ 2700 K - 3880 lm D /2 _ 3000 K - 3880 lm /3 _ 3500 K - 4002,4 lm E CRI >90	Control 0300 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
	Materials Diffuser: Pressed-glass. Horizontal rods and Canopy: Steel. Body: Aluminum. Light Source and electronics 8 x LED 4,5 W 350 mA Constant Current 350 mA 110~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,3246 m³ Gross weight 19,95 Kg Net weight 8,95 Kg Notes 0300 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt Pressed-glass diffuser. Configuration layout at vibia.com Min. quantity, upcharge and extra lead time apply. LED IP20 CE UK EAC	

0301	Finishes 04/ _ _ Black (RAL 9005)	LED Colour Temperature /1 _ 2700 K - 3880 lm D /2 _ 3000 K - 3880 lm /3 _ 3500 K - 4002,4 lm E CRI >90	Control 0301 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
	Materials Diffuser: Pressed-glass. Horizontal rods and Canopy: Steel. Body: Aluminum. Light Source and electronics 8 x LED 4,5 W 350 mA Constant Current 350 mA 110~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,2100 m³ Gross weight 17,75 Kg Net weight 8,75 Kg Notes 0301 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt Pressed-glass diffuser. Configuration layout at vibia.com Min. quantity, upcharge and extra lead time apply. LED IP20 CE UK EAC	

0302	Finishes 04/ _ _ Black (RAL 9005)	LED Colour Temperature /1 _ 2700 K - 3880 lm D /2 _ 3000 K - 3880 lm /3 _ 3500 K - 4002,4 lm E CRI >90	Control 0302 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
	Materials Diffuser: Pressed-glass. Horizontal rods and Canopy: Steel. Body: Aluminum. Light Source and electronics 8 x LED 4,5 W 350 mA Constant Current 350 mA 110~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,1558 m³ Gross weight 14,6 Kg Net weight 8,6 Kg Notes 0302 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt Pressed-glass diffuser. Configuration layout at vibia.com Min. quantity, upcharge and extra lead time apply. LED IP20 CE UK EAC	

0303

Finishes
● **04/** _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 3880 lm
D
/2 _ 3000 K - 3880 lm
/3 _ 3500 K - 4002,4 lm
E
CRI >90

Control
0303 _ _ / _ _

_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1558 m³
Gross weight 13 Kg Net weight 8,5 Kg

Notes

0303 _ _ / _ A: Push; 1-10V; DALI-2 **Bi-volt**

Pressed-glass diffuser.

Configuration layout at vibia.com

Min. quantity, upcharge and extra lead time apply.

LED ☐ IP20 CE UK ENE

0309

Finishes
● **04/** _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 1940 lm
D
/2 _ 3000 K - 1940 lm
/3 _ 3500 K - 2001,2 lm
E
CRI >90

Control
0309 _ _ / _ _

_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics

4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,2100 m³
Gross weight 12,3 Kg Net weight 5,3 Kg

Notes

0309 _ _ / _ A: Push; 1-10V; DALI-2 **Bi-volt**

Pressed-glass diffuser.

Configuration layout at vibia.com

Min. quantity, upcharge and extra lead time apply.

LED ☐ IP20 CE UK ENE

0310

Finishes
● **04/** _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 1940 lm
D
/2 _ 3000 K - 1940 lm
/3 _ 3500 K - 2001,2 lm
E
CRI >90

Control
0310 _ _ / _ _

_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics

4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,2100 m³
Gross weight 11,8 Kg Net weight 4,8 Kg

Notes

0310 _ _ / _ A: Push; 1-10V; DALI-2 **Bi-volt**

Pressed-glass diffuser.

Configuration layout at vibia.com

Min. quantity, upcharge and extra lead time apply.

LED ☐ IP20 CE UK ENE

O311	Finishes ● O4/ _ _ Black (RAL 9005) LED Colour Temperature /1 _ 2700 K - 1940 lm D /2 _ 3000 K - 1940 lm /3 _ 3500 K - 2001,2 lm E CRI >90 Materials Diffuser: Pressed-glass. Horizontal rods and Canopy: Steel. Body: Aluminum. Light Source and electronics 4 x LED 4,5 W 350 mA Constant Current 350 mA 110~240V 50/60Hz	Control O311 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi Packaging 2 Boxes Total Vol 0,1558 m³ Gross weight 8,7 Kg Net weight 4,7 Kg Notes O311 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt Pressed-glass diffuser. Configuration layout at vibia.com Min. quantity, upcharge and extra lead time apply. LED IP20 CE UK ErC
O312	Finishes ● O4/ _ _ Black (RAL 9005) LED Colour Temperature /1 _ 2700 K - 1940 lm D /2 _ 3000 K - 1940 lm /3 _ 3500 K - 2001,2 lm E CRI >90 Materials Diffuser: Pressed-glass. Horizontal rods and Canopy: Steel. Body: Aluminum. Light Source and electronics 4 x LED 4,5 W 350 mA Constant Current 350 mA 110~240V 50/60Hz	Control O312 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi Packaging 2 Boxes Total Vol 0,1558 m³ Gross weight 8,6 Kg Net weight 4,6 Kg Notes O312 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt Pressed-glass diffuser. Configuration layout at vibia.com Min. quantity, upcharge and extra lead time apply. LED IP20 CE UK ErC



Wireflow Lineal

Design by Arik Levy

Wireflow Lineal's ultra-minimalist design is balanced by a distinctive, precipitous presence that adds an intriguing accent to any room. Ideal for illuminating large spaces with high ceilings, its lean profile traces a formal silhouette in an open space with meticulous precision.

Pendant

0320

57 cm x max. 200 cm

0338

145 cm x max. 200 cm

0330

275 cm x max. 200 cm

0325

155 cm x max. 200 cm

Personalise your own
Wireflow Lineal
composition quick
and easy at **vibia.com**

Without pressed-glass diffuser.



0320

Finishes
● **04/** _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 970 lm
ID
/2 _ 3000 K - 970 lm
/3 _ 3500 K - 1000,6 lm
IE
CRI >90

Control

0320 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Horizontal rods: Steel.
Body and canopy: Aluminum.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,20 x 0,075 x 0,70 m
Vol 0,0150 m³
Gross weight 5,1 Kg Net weight 2,6 Kg

Notes

0320 _ _ / _ 1: DALI-2 **Bi-volt**
0320 _ _ / _ B: Push; 1-10V **Bi-volt**

Linear canopy

LED IP20 CE UK ENE

0325

Finishes
 **04/** __ Black
 (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 2910 lm

/2 _ 3000 K - 2910 lm
/3 _ 3500 K - 3001,8 lm

 CRI >90

Control

0325 __ / __

__ / __ **1** DALI-2
 __ / __ **B** Push; 1-10V
 __ / __ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
 Horizontal rods: Steel.
 Body and canopy: Aluminum.

Light Source and electronics

6 x LED 4,5 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging

1 Box 0,20 x 0,075 x 2,30 m
 Vol 0,0345 m³
 Gross weight 8 Kg Net weight 4,5 Kg

Notes

0325 __ / __ B: Push; 1-10V 

Linear canopy







0330

Finishes
 **04/** __ Black
 (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 4850 lm

/2 _ 3000 K - 4850 lm
/3 _ 3500 K - 5003 lm

 CRI >90

Control

0330 __ / __

__ / __ **1** DALI-2
 __ / __ **B** Push; 1-10V
 __ / __ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
 Horizontal rods: Steel.
 Body and canopy: Aluminum.

Light Source and electronics

10 x LED 4,5 W 700 mA
 Constant Current 350 mA
 220-240V 50/60Hz

Packaging

1 Box 0,20 x 0,075 x 3,30 m
 Vol 0,0495 m³
 Gross weight 9,5 Kg Net weight 5,0 Kg

Notes

Linear canopy







0338

Finishes
 **04/** __ Black
 (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 2910 lm

/2 _ 3000 K - 2910 lm
/3 _ 3500 K - 3001,8 lm

 CRI >90

Control

0338 __ / __

__ / __ **1** DALI-2
 __ / __ **B** Push; 1-10V
 __ / __ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
 Horizontal rods: Steel.
 Body and canopy: Aluminum.

Light Source and electronics

6 x LED 4,5 W 700 mA
 Constant Current 700 mA
 220-240V 50/60Hz

Packaging

1 Box 0,20 x 0,075 x 3,30 m
 Vol 0,0495 m³
 Gross weight 9,5 Kg Net weight 5,0 Kg

Notes

Linear canopy











Wireflow Free

Design by Arik Levy

True to its name, Wireflow Free adapts easily to any environment. Its cables can be directed to form unexpected visual rhythms across a wall or ceiling, or to branch out from a central point and delineate specific activity zones within a space. Free offers maximum versatility in both form and function.

Pendant

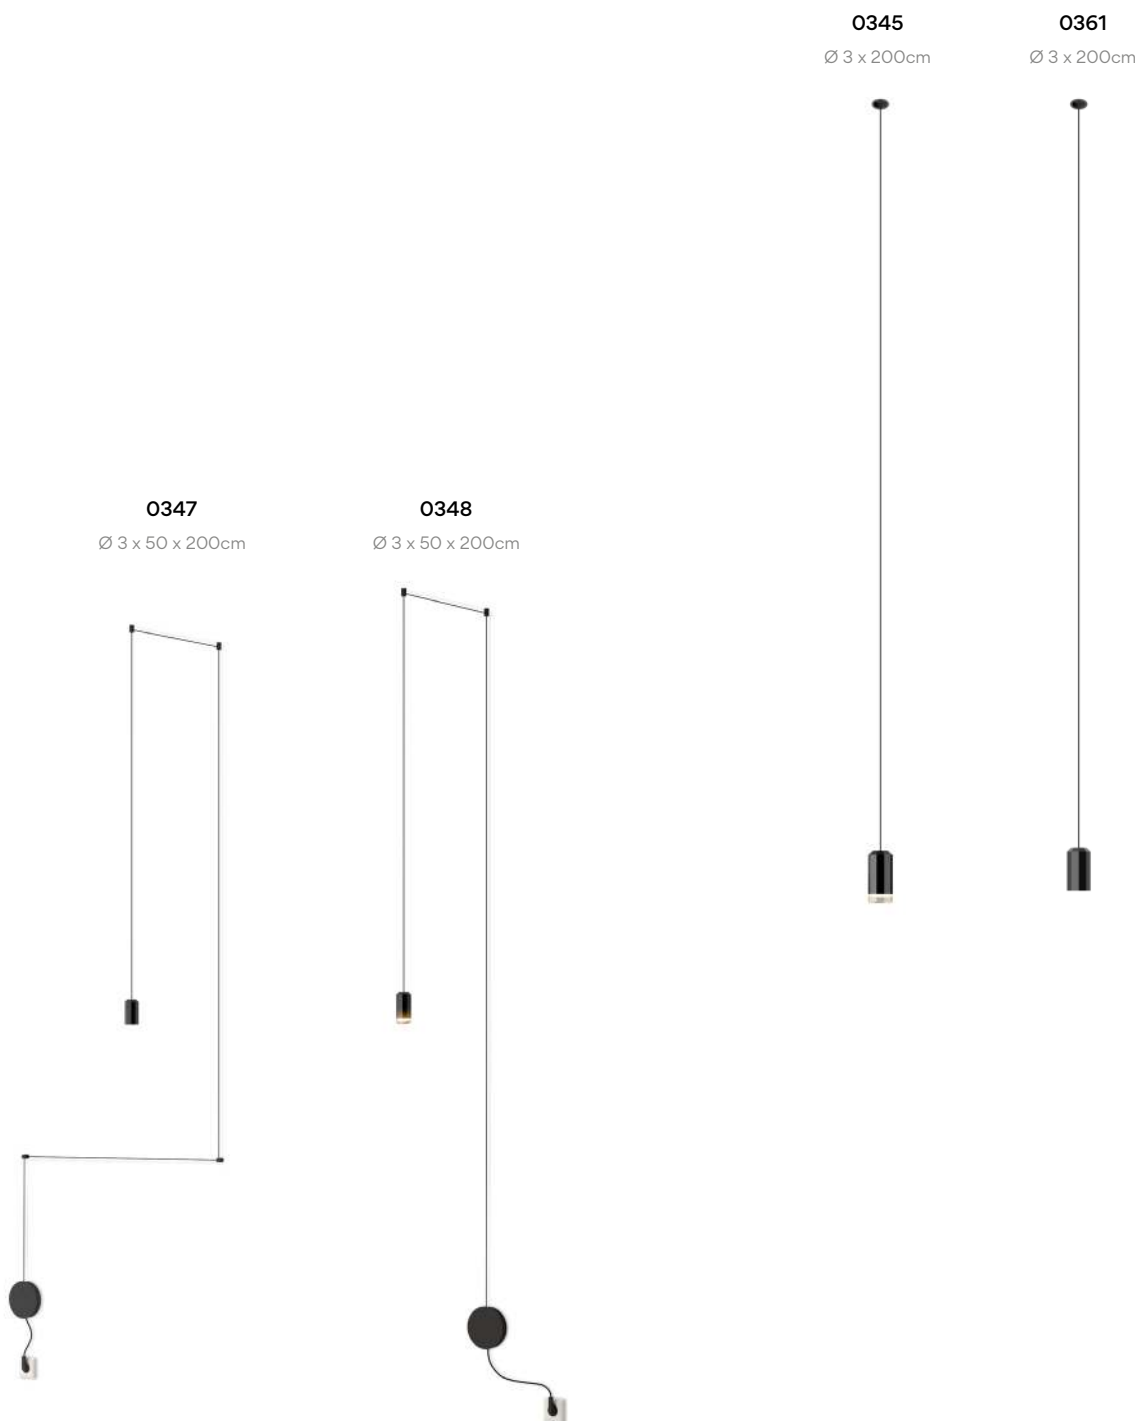

0345

Finishes
● 04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 485 lm
D
/2 _ 3000 K - 485 lm
/3 _ 3500 K - 500,3 lm
E
CRI >90

Control
0345 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 700 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,6 Kg Net weight 2,34 Kg

Notes

0345 _ _ / _ 1: DALI-2 Bi-volt
0345 _ _ / _ B: Push; 1-10V Bi-volt
With pressed-glass diffuser.
Extra cable length.


LED IP20 CE UK ENEC

0347

Finishes
● 04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 490 lm
D
CRI >80

Control
0347 _ _ / 15 Push



Materials

Diffuser: PC- Polycarbonate. Body: Aluminum.
Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,20 m
Vol 0,0055 m³
Gross weight 1,5 Kg Net weight 1,35 Kg

Notes

Without pressed-glass diffuser.
Electric cable 2,5 m. With plug.
Dimmer push button on the wall plate.


LED IP20 CE UK ENEC

0348

Finishes
● 04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 490 lm
D
CRI >80

Control
0348 04 / 15 Push



Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,9 Kg Net weight 1,71 Kg

Notes

With pressed-glass diffuser.
Electric cable 2,5 m. With plug.
Dimmer push button on the wall plate.

LED IP20 CE UK ENEC

1160	10	/1A	18
Model	Finish	LED Colour Temperature	Control
			Electrical connection
			Only for pendant

0361	Finishes 04/ _ _ Black (RAL 9005)	LED Colour Temperature /1 _ 2700 K - 485 lm D /2 _ 3000 K - 485 lm /3 _ 3500 K - 500,3 lm E CRI >90	Control 0361 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
Select Eletrical connection Surface Free Wire Built-in XS Remote Micro Remote XXS			
Materials Diffuser: PC-Polycarbonate. Body: Aluminum. Canopy: Steel. Ceiling supports: POM. Light Source and electronics 1 x LED 4,5 W 700 mA Constant Current 350 mA 100~240V 50/60Hz		Packaging 1 Box 0,25 x 0,42 x 0,42 m Vol 0,0441 m³ Gross weight 2,6 Kg Net weight 2,34 Kg Notes 0361 _ _ / _ 1: DALI-2 Bi-volt 0361 _ _ / _ B: Push; 1-10V Bi-volt Without pressed-glass diffuser. Additional cable length personalisation. LED ⚡ IP20 CE UK ENEC	



Select your model at vibia.com and adjust



2 x 0361



3 x 0345



3 x 0345



4 x 0361




4 x 0345



5 x 0345



5 x 0361




7 x 0345



6 x 0361




8 x 0345




15 x 0361



8 x 0345



9 x 0361



12 x 0345



11 x 0361



41 x 0361



25 x 0345



54 x 0345



45 x 0361

See more
multiple models
at vibia.com

Finishes

● **04/** _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K
/2 _ 3000 K
/3 _ 3500 K
CRI >90

Control

Model _ _ / _ _


_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0345, 0361

Drop ceiling



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling



Ø 20 cm

match with fixture finish.



Ø 20 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.



Ø 36 cm



Ø 40 cm

Remote

Built-in

Materials

Diffuser: Pressed-glass. / PC- Polycarbonate.
Body: Aluminum. Canopy: Steel.
Ceiling supports: POM.

Notes

Additional cable length from 2 m.

LED IP20 CE UK ENE Bi-volt

Wireflow Chandelier


Design by Arik Levy

Wireflow Chandelier is a contemporary reimagining of the traditional fixture. Its ultramodern silhouette provides an unexpected twist, while its graceful lines echo with a sense of timeless elegance. Though substantial in size its airy outline creates a feeling of transparency.

Pendant


0315

120 x 279 cm

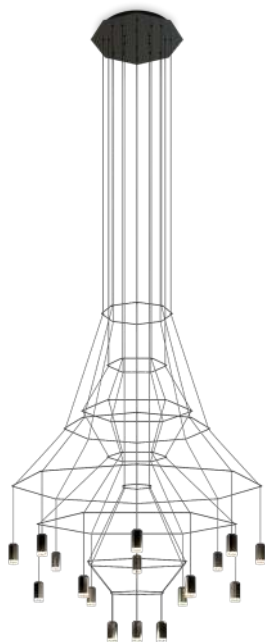

0374

150 x 307 cm

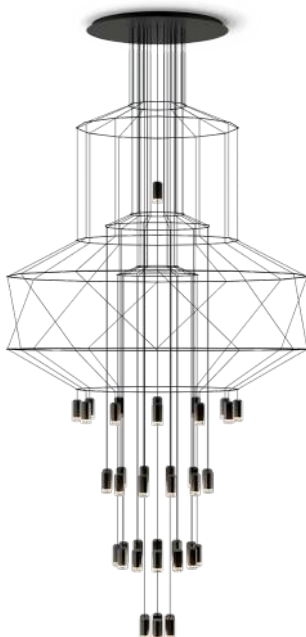

0375

150 x 396 cm



0376

150 x 112 cm



0377

150 x 194 cm







0378

150 x 276 cm




Personalise your own
Wireflow Chandelier
composition quick
and easy at **vibia.com**

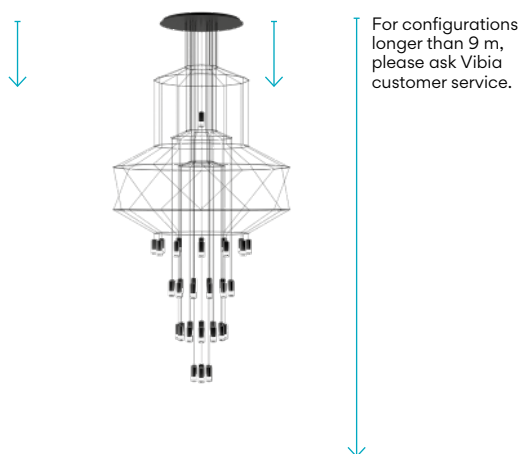

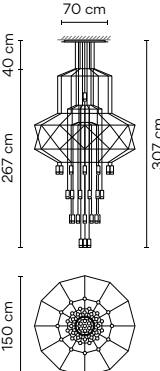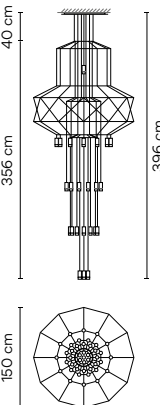0315 	Finishes ● 04/ _ _ Black (RAL 9005) LED Colour Temperature /1 _ 2700 K - 9700 lm D /2 _ 3000 K - 9700 lm /3 _ 3500 K - 10006,1 lm E CRI >90 Materials Diffuser: Pressed-glass. Body: Aluminum. Canopy and horizontal rods: Steel. Light Source and electronics 20 x LED 4,5 W 700 mA Constant Current 700 mA 100~240V 50/60Hz	Control 0315 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi Packaging 2 Boxes Total Vol 0,3832 m³ Gross weight 32 Kg Net weight 18 Kg Notes Configuration layout at vibia.com Min. quantity, upcharge and extra lead time apply LED IP20 CE UK ENEC
0374 	Finishes ● 04/ _ _ Black (RAL 9005) LED Colour Temperature /1 _ 2700 K - 20855 lm D /2 _ 3000 K - 20855 lm /3 _ 3500 K - 21513,1 lm E CRI >90 Materials Diffuser: Pressed-glass. Body: Aluminum. Canopy and horizontal rods: Steel. Light Source and electronics 43 x LED 4,5 W 700 mA Constant Current 700 mA 100~240V 50/60Hz	Control 0374 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi Packaging 2 Boxes Total Vol 0,5000 m³ Gross weight 57 Kg Net weight 47 Kg Notes Configuration layout at vibia.com Min. quantity, upcharge and extra lead time apply LED IP20 CE UK ENEC
0375 	Finishes ● 04/ _ _ Black (RAL 9005) LED Colour Temperature /1 _ 2700 K - 20855 lm D /2 _ 3000 K - 20855 lm /3 _ 3500 K - 21513,1 lm E CRI >90 Materials Diffuser: Pressed-glass. Body: Aluminum. Canopy and horizontal rods: Steel. Light Source and electronics 43 x LED 4,5 W 700 mA Constant Current 700 mA 100~240V 50/60Hz	Control 0375 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi Packaging 2 Boxes Total Vol 0,5000 m³ Gross weight 57 Kg Net weight 47 Kg Notes Configuration layout at vibia.com Min. quantity, upcharge and extra lead time apply LED IP20 CE UK ENEC

0376



Finishes
● **04/** _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 20370 lm
D
/2 _ 3000 K - 20370 lm
/3 _ 3500 K - 21012,8 lm
E
CRI >90

Control

0376 _ _ / _ _

_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes

Configuration layout at vibia.com
Min. quantity, upcharge and extra
lead time apply

LED IP20 CE UK ENE

0377



Finishes
● **04/** _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 20370 lm
D
/2 _ 3000 K - 20370 lm
/3 _ 3500 K - 21012,8 lm
E
CRI >90

Control

0377 _ _ / _ _

_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes

Configuration layout at vibia.com
Min. quantity, upcharge and extra
lead time apply

LED IP20 CE UK ENE

0378

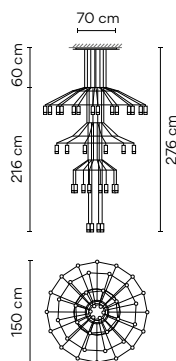

Finishes
● **04/** _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 20370 lm
D
/2 _ 3000 K - 20370 lm
/3 _ 3500 K - 21012,8 lm
E
CRI >90

0378 _ _ / _ _

_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes

Configuration layout at vibia.com
Min. quantity, upcharge and extra
lead time apply

LED IP20 CE UK ENE

I.Cono


Design by Lievore, Altherr, Molina

I.Cono is distinguished by its signature visor-shaped shade that's sleekly angled for a stylish look. Ideal for precision lighting or reading, its pure and clean design conceals its rotation mechanisms.

Table Floor Wall



0700



Finishes

- 10 White (NCS S 0300-N)
- 21 Black Grey (NCS S 7000-N)
- 25 Beige D1 (NCS S 4005-G80Y)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)

Finish customization

(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

Materials

Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Tube: Iron. Base: Zinc Alloy.

Light Source and electronics

1 x LED 6W 350 mA
Constant current 350mA
100~240Vac 50/60Hz

LED Colour Temperature

/1_ 2700 K - 745 lm



CRI >90

Control

0700 __ / __

__ / 15 Push

__ / 12 Casambi

Packaging


1 Box 0,81 x 0,31 x 0,33 m
Vol 0,08 m³
Gross weight 2,6 Kg Net weight 1,9 Kg

Notes

Electric cable 2,5 m.
On/off switch on the cable.

LED IP20 CE UK ENEC Multi-volt

0712

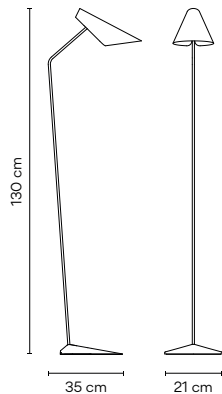

Finishes

- 10 White (NCS S 0300-N)
- 21 Black Grey (NCS S 7000-N)
- 25 Beige D1 (NCS S 4005-G80Y)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)

Finish customization

(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

Materials

Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Tube: Iron. Base: Zinc Alloy.

Light Source and electronics

1 x LED 6W 350 mA
Constant current 350mA
100~240Vac 50/60Hz

LED Colour Temperature

/1_ 2700 K - 745 lm



CRI >90

Control

0712 _ _ / _ _

_ _ / 15 Push

_ _ / 12 Casambi

Packaging


1 Box 1,43 x 0,30 x 0,30 m
Vol 0,13 m³
Gross weight 4 Kg Net weight 3 Kg

Notes


0712 _ _ / 15: Push **Multi-volt**

Electric cable 2,5 m.

On/off switch on the cable.



0720



Finishes

- 10 White (NCS S 0300-N)
- 21 Black Grey (NCS S 7000-N)
- 25 Beige D1 (NCS S 4005-G80Y)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)

Finish customization

(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

Materials

Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Base: Aluminum. Tube: Iron.

Light Source and electronics

1 x LED 6W 350 mA
Constant current 350mA
220~240Vac 50/60Hz

LED Colour Temperature

/1_ 2700 K - 745 lm



CRI >90

Control


0720 _ _ / 10 On/ Off

Packaging

1 Box 0,20 x 0,21 x 0,13 m
Vol 0,00546 m³
Gross weight 1,1 Kg Net weight 0,8 Kg

Notes

On/off switch on the base.



0721

Finishes

- 10 White (NCS S 0300-N)
- 21 Black Grey (NCS S 7000-N)
- 25 Beige D1 (NCS S 4005-G80Y)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)

Finish customization

(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

Materials

Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Base: Aluminum. Tube: Iron.

Light Source and electronics

1 x LED 6W 350 mA
Constant current 350mA
220~240Vac 50/60Hz

LED Colour Temperature

/1_ 2700 K - 745 lm



CRI >90

Control

0721 _ _ / _ _

_ _ / 10 On/ Off

_ _ / 1D_ 30 Push; DALI (Remote)


_ _ / 1Z_ 30 Casambi (Remote)

Packaging

1 Box 0,20 x 0,21 x 0,13 m
Vol 0,00546 m³
Gross weight 1,1 Kg Net weight 0,8 Kg

Notes

Without switch.



Algorithm Grid

Design by Toan Nguyen


Like a cloud of frozen rain, this collection brings together beauty and geometry. Mathematical order provides a magical harmony with an astonishing range of permutations and compositions. Can be customized to suit any space.

Pendant

* Built-in version

0830 *0832

123 x 25 cm



0835 *0837

214 x 25 cm




0840 *0842

306 x 25 cm



0845 *0847

183 x 34 cm



0850 *0852

399 x 34 cm




0825 *0827

75 x 85 cm



0860 *0862

110 x 110 cm




0865 *0867

160 x 160 cm



0870 *0872

110 x 60 cm



0875 *0877

185 x 60 cm




Surface.	Built-in. 11,5 cm Die-cut diameter, 12 cm minimum height in ceiling.	Adjustable cable installation.	Rigid stem installation. Fixed at 25 cm.
----------	--	--------------------------------	---

Adjust height of standard model

To personalize luminaire height, without adjusting diffusers layout.

The steel cables that go from the structure to the ceiling are the only ones that allow the height of the lamp to be adjusted. The installation manual describes how to do this and how to cut the cables.

Personalise your own
Algorithm composition
quick and easy at
vibia.com

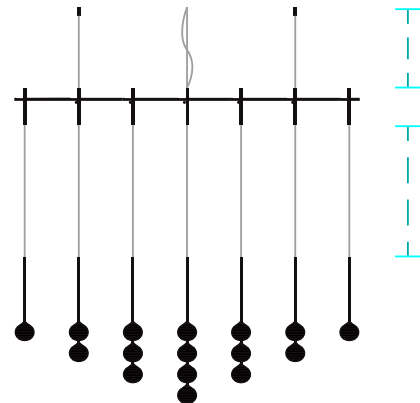

0825	Finishes ● 18/ _ _ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 3122,8 lm /3 _ 3500 K - 3122,8 lm F CRI >90	Control 0825 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
	Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum. Light Source and electronics 10 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,324 m³ Gross weight 15,5 Kg Net weight 10,5 Kg Notes Surface LED ⓘ IP20 CE UK ENE ⓘ	
0827	Finishes ● 18/ _ _ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 3122,8 lm /3 _ 3500 K - 3122,8 lm F CRI >90	Control 0827 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
	Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum. Light Source and electronics 10 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,324 m³ Gross weight 15,5 Kg Net weight 10,5 Kg Notes Built-in LED ⓘ IP20 CE UK ENE ⓘ ⓘ Ø 10,5 cm	

0830	Finishes  18/ __ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 1873,68 lm /3 _ 3500 K - 1873,7 lm  CRI >90	Control 0830 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.	Light Source and electronics 6 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,1705 m³ Gross weight 3,5 Kg Net weight 5,8 Kg Notes Surface      
0832	Finishes  18/ __ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 1873,68 lm /3 _ 3500 K - 1873,7 lm  CRI >90	Control 0832 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.	Light Source and electronics 6 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,1705 m³ Gross weight 3,5 Kg Net weight 5,8 Kg Notes Built-in        Ø 10,5 cm
0835	Finishes  18/ __ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 3122,8 lm /3 _ 3500 K - 3122,8 lm  CRI >90	Control 0835 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.	Light Source and electronics 10 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,3220 m³ Gross weight 15,5 Kg Net weight 10,5 Kg Notes Surface      
0837	Finishes  18/ __ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 3122,8 lm /3 _ 3500 K - 3122,8 lm  CRI >90	Control 0837 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.	Light Source and electronics 10 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,3220 m³ Gross weight 15,5 Kg Net weight 10,5 Kg Notes Built-in        Ø 10,5 cm

0840

Finishes

● 18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/1 _ 2700 K - 4371,92 lm
/3 _ 3500 K - 4371,92 lm
F
CRI >90

Control

0840 _ _ / _ _
_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

3 Boxes
Total Vol 0,5275 m³
Gross weight 17,3 Kg Net weight 11,3 Kg

Notes

Surface

LED IP20 CE UK ENE

0842

Finishes

● 18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/1 _ 2700 K - 4371,92 lm
/3 _ 3500 K - 4371,92 lm
F
CRI >90

Control

0842 _ _ / _ _
_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

3 Boxes
Total Vol 0,5275 m³
Gross weight 17,3 Kg Net weight 11,3 Kg

Notes

Built-in

LED IP20 CE UK ENE Ø 10,5 cm

0845

Finishes

● 18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/1 _ 2700 K - 4371,92 lm
/3 _ 3500 K - 4371,92 lm
F
CRI >90

Control

0845 _ _ / _ _
_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3220 m³
Gross weight 18,3 Kg Net weight 13,3 Kg

Notes

Surface

LED IP20 CE UK ENE

0847

Finishes

● 18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/1 _ 2700 K - 4371,92 lm
/3 _ 3500 K - 4371,92 lm
F
CRI >90

Control

0847 _ _ / _ _
_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,3220 m³
Gross weight 18,3 Kg Net weight 13,3 Kg

Notes


Built-in

LED IP20 CE UK ENE Ø 10,5 cm

0850	Finishes 18/ _ _ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 9056,12 lm /3 _ 3500 K - 9056,12 lm F CRI >90	Control 0850 _ _ / _ _ _ _ / _ _ A Push; 1-10V; DALI-2 _ _ / _ _ Z Casambi
	Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum. Light Source and electronics 29 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,6260 m³ Gross weight 26 Kg Net weight 20 Kg Notes Surface LED  IP20   EAC  Dimmer	

0852	Finishes 18/ _ _ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 9056,12 lm /3 _ 3500 K - 9056,12 lm F CRI >90	Control 0852 _ _ / _ _ _ _ / _ _ A Push; 1-10V; DALI-2 _ _ / _ _ Z Casambi
	Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum. Light Source and electronics 29 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,6260 m³ Gross weight 26 Kg Net weight 20 Kg Notes Built-in LED  IP20   EAC   Ø 10,5 cm	

0860	Finishes 18/ _ _ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 4059,64 lm /3 _ 3500 K - 4059,64 lm F CRI >90	Control 0860 _ _ / _ _ _ _ / _ _ A Push; 1-10V; DALI-2 _ _ / _ _ Z Casambi
	Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum. Light Source and electronics 13 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,3290 m³ Gross weight 17,35 Kg Net weight 11,85 Kg Notes Surface LED  IP20   EAC 	

0862	Finishes 18/ _ _ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 4059,64 lm /3 _ 3500 K - 4059,64 lm F CRI >90	Control 0862 _ _ / _ _ _ _ / _ _ A Push; 1-10V; DALI-2 _ _ / _ _ Z Casambi
	Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum. Light Source and electronics 13 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,3290 m³ Gross weight 17,35 Kg Net weight 11,85 Kg Notes Built-in LED  IP20   EAC   Ø 10,5 cm	

0865

Finishes 18/ _ _ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 7807 lm /3 _ 3500 K - 7807 lm F  CRI >90	Control 0865 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.	Light Source and electronics 25 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,7280 m³ Gross weight 25,25 Kg Net weight 20,25 Kg
		Notes Surface LED   CE UK ENE 

0867

Finishes 18/ _ _ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 7807 lm /3 _ 3500 K - 7807 lm F  CRI >90	Control 0867 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.	Light Source and electronics 25 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,7280 m³ Gross weight 25,25 Kg Net weight 20,25 Kg
		Notes Built-in LED   CE UK ENE   Ø 10,5 cm

0870

Finishes 18/ _ _ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 4684,2 lm /3 _ 3500 K - 4684,2 lm F  CRI >90	Control 0870 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.	Light Source and electronics 15 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,2679 m³ Gross weight 18,25 Kg Net weight 13,75 Kg
		Notes Surface LED   CE UK ENE 

0872

Finishes 18/ _ _ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /1 _ 2700 K - 4684,2 lm /3 _ 3500 K - 4684,2 lm F  CRI >90	Control 0872 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
Materials Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.	Light Source and electronics 15 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,2679 m³ Gross weight 18,25 Kg Net weight 13,75 Kg
		Notes Built-in LED   CE UK ENE   Ø 10,5 cm

0875	Finishes	LED Colour Temperature	Control
	● 18/ _ _ Graphite (ADAPTA RF9913WX)	/1 _ 2700 K - 7494,72 lm /3 _ 3500 K - 7494,72 lm F	0875 _ _ / _ _ _ _ / _ _ A Push; 1-10V; DALI-2 _ _ / _ _ Z Casambi
	CRI >90		
0877	Materials	Packaging	
	Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.	2 Boxes Total Vol 0,4500 m³ Gross weight 30,1 Kg Net weight 22,1 Kg	
	Light Source and electronics	Notes	
	24 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Surface	
		LED IP20 CE UK ENEC	
0877	Finishes	LED Colour Temperature	Control
	● 18/ _ _ Graphite (ADAPTA RF9913WX)	/1 _ 2700 K - 7494,72 lm /3 _ 3500 K - 7494,72 lm F	0877 _ _ / _ _ _ _ / _ _ A Push; 1-10V; DALI-2 _ _ / _ _ Z Casambi
	CRI >90		
0877	Materials	Packaging	
	Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.	2 Boxes Total Vol 0,4500 m³ Gross weight 30,1 Kg Net weight 22,1 Kg	
	Light Source and electronics	Notes	
	24 x LED 3,15 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz	Built-in	
		LED IP20 CE UK ENEC Ø 10,5 cm	



Algorithm Free

Design by Toan Nguyen

Like a cloud of frozen rain, this collection brings together beauty and geometry. Each unique grouping of globes defines areas of interior space, underlining their multiple uses while becoming a single aesthetic element.

1160	10	/1A	18
Model	Finish	LED Colour Temperature	Control
		Electrical connection	Only for pendant

Pendant

0820

Ø 9 cm



0820

Finishes

● 18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/1 _ 2700 K - 312,28 lm

☐

/3 _ 3500 K - 312,3 lm

☐

CRI >90

Control

0820 _ _ / _ _

_ _ / _ A Push; 1-10V; DALI-2

_ _ / _ Z Casambi



⚡ Select Electrical connection




Surface



Free Wire



Built-in XS



Remote
Micro



Remote
XXS

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

1 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

1 Box 0,18 x 0,55 x 0,55 m
Vol 0,0131 m³
Gross weight 2,17 Kg Net weight 1,57 Kg

Notes

0820 _ _ / _ A: Push; 1-10V; DALI-2 **Bi-volt**

Surface.

Extra cable length.

LED **IP20** **CE** **UK** **ETL**



Select your model at vibia.com and adjust



2 x 0820



3 x 0820



3 x 0820



3 x 0820



4 x 0820



4 x 0820



5 x 0820



5 x 0820



5 x 0820



7 x 0820



6 x 0820



7 x 0820




15 x 0820



9 x 0820



10 x 0820



20 x 0820



41 x 0820



30 x 0820



54 x 0820

See more
multiple models
at vibia.com

Finishes	LED Colour Temperature	Control
● 18/ _ _ Graphite (ADAPTA RF9913WX)	/1 _ 2700 K /3 _ 3500 K CRI >90	0820 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0820

Drop ceiling



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.


Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.

Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

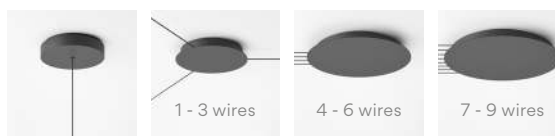

Ø 19 cm

match with fixture finish.

Ø 22 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

Ø 36 cm

Ø 40 cm

Remote

Built-in

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Notes

Additional cable length from 2 m.

LED IP20 CE UK ENE Bi-volt

Slim




Design by Jordi Vilardell

Streamlined and refined,
Slim serves as a sleek punctuation mark.

Pendant

0920

Ø 2,6 cm

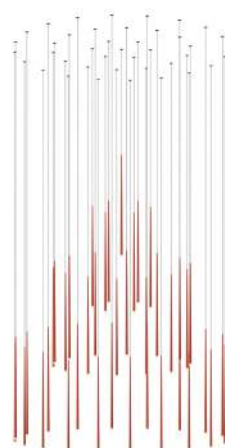

0920

Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization

(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 181,22 lm
[F]
CRI >90
/2 _ 3000 K - 163,2 lm
[G]
CRI >80
/3 _ 3500 K - 207,6 lm
[F]
CRI >90

Control

0920 _ _ / _ _

_ _ / _ 0 On/ Off
_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi



Select Electrical connection



Surface




Surface



Free Wire



Built-in XS



Remote
Micro



Remote
XXS

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 1,20 m
Vol 0,0155 m³
Gross weight 2,14 Kg Net weight 1,2 Kg


Notes

0920 _ _ / _ 0: On/ Off **Bi-volt**
0920 _ _ / _ 1: DALI-2 **Bi-volt**
0920 _ _ / _ B: Push; 1-10V **Bi-volt**
Extra cable length.

LED IP20 CE ENEC



Select your model at vibia.com and adjust

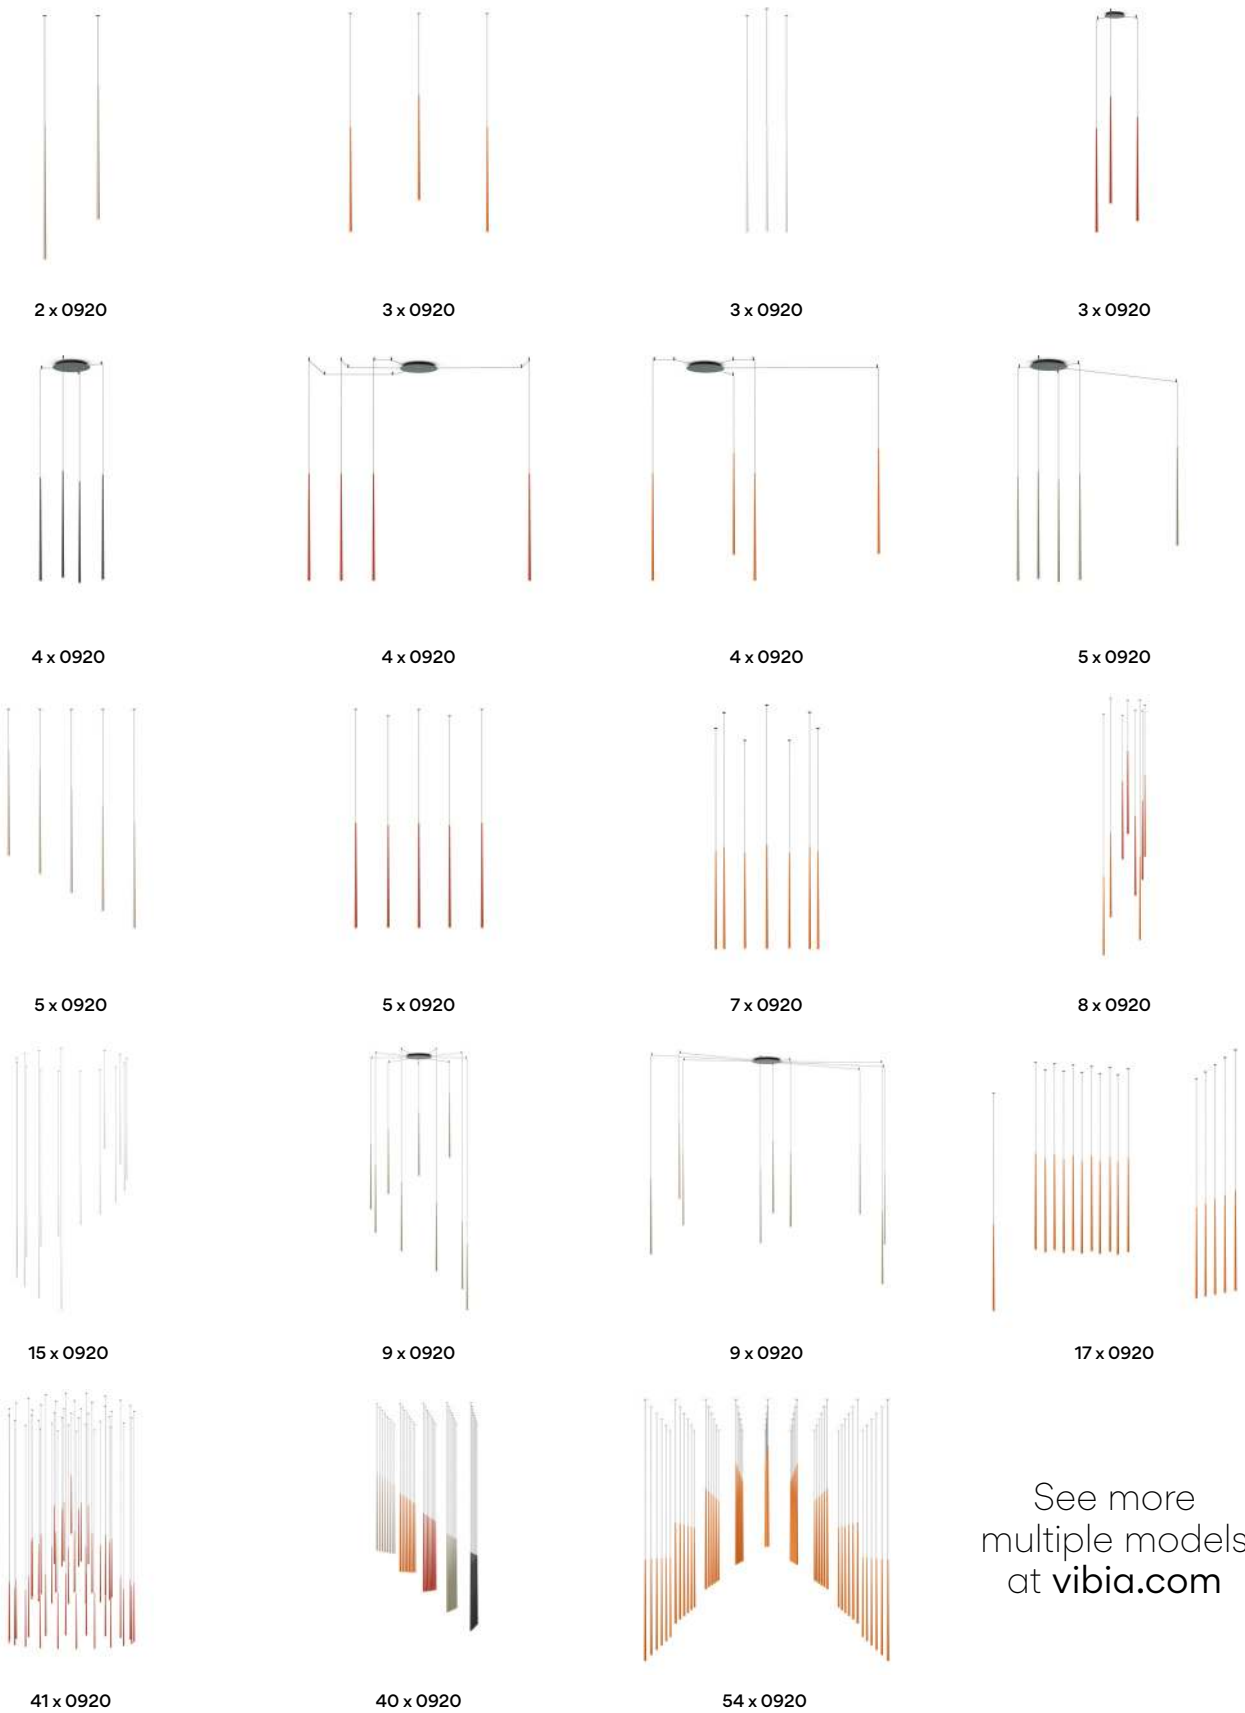

See more
multiple models
at vibia.com

Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K
/2 _ 3000 K
/3 _ 3500 K
CRI >90

Control

Model _ _ / _ _


_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0920 _ _ / _ 0

Drop ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.



Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Match with
fixture finish.



Ø 8 cm
height 6 cm

match with
fixture finish.

Regular ceiling



Ø 17,3 cm

match with
fixture finish.



1 - 3 wires

Ø 20 cm



4 - 6 wires

Ø 36 cm




7 - 9 wires

Ø 40 cm

you can choose the finish of the
canopy among black, white or any
colour matching one of the pendant.

For Ref. 0920 _ _ / _ 1 / _ B / _ Z

Drop ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.



Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Match with
fixture finish.



Ø 8 cm
height 6 cm

match with
fixture finish.

Regular ceiling



Ø 20 cm

match with
fixture finish.



1 wire

Ø 20 cm



2 - 6 wires

Ø 36 cm



7 - 9 wires

Ø 40 cm

you can choose the finish of the
canopy among black, white or any
colour matching one of the pendant.

Remote

Built-in

Materials


Diffuser: Glass. Body: FG- Fiberglass .
Canopy: Steel.

Notes

Additional cable length
from 2 m.


LED IP20 CE UK ENEC Bi-volt

Pendant

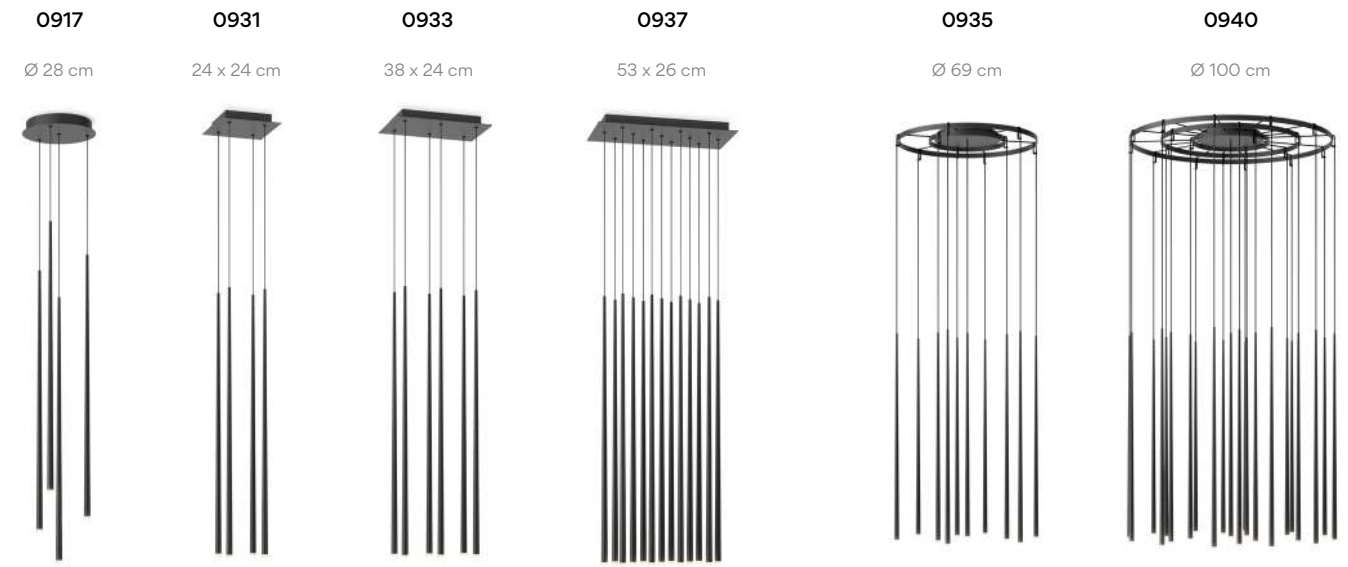

0917	Finishes	LED Colour Temperature	Control
	10/ _ _ White (NCS S 0300-N)	/1 _ 2700 K - 724,88 lm F	0917 _ _ / _ _
	11/ _ _ Black (NCS S 8500-N)	CRI >90	_ _ / _ 1 DALI-2
	24/ _ _ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 652,8 lm G	_ _ / _ B Push; 1-10V
	37/ _ _ Terra Red (NCS S 4040-Y70R)	CRI >80	_ _ / _ Z Casambi
	47/ _ _ Green L1 (NCS S 4005-G80Y)	/3 _ 3500 K - 830,6 lm F	
	68/ _ _ Ocre (NCS S 3050-Y30R)	CRI >90	
	Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)		
	Materials	Packaging	Notes
	Diffuser: Glass.	1 Box 0,22 x 0,48 x 1,20 m	0917 _ _ / _ 1: DALI-2 Bi-volt
	Body: FG- Fiberglass.	Vol 0,1278 m³	0917 _ _ / _ B: Push; 1-10V Bi-volt
	Canopy: Steel.	Gross weight 8 Kg Net weight 5,2 Kg	Surface.
	Light Source and electronics		Extra cable length.
	4 x LED 2,1 W 700mA		UNTIL STOCK RUNS OUT
	Constant Current 700 mA		
	110-240V 50/60Hz		
		LED IP20 CE UK ENEC	

0931



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization

(Available options:
Vibia colour palette.

Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 724,88 lm
F >90
/2 _ 3000 K - 652,8 lm
G >80
/3 _ 3500 K - 830,6 lm
F >90

Control

0931 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

4 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m³
Gross weight 8 Kg Net weight 5,2 Kg

Notes


0931 _ _ / 1: DALI-2 **Bi-volt**
0931 _ _ / B: Push; 1-10V **Bi-volt**

Surface.
Extra cable length.

UNTIL STOCK RUNS OUT

LED IP20 CE UK ENE

0933



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization

(Available options:
Vibia colour palette.

Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1087,32 lm
F >90
/2 _ 3000 K - 979,2 lm
G >90
/3 _ 3500 K - 1245,9 lm
F >90

Control

0933 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

6 x LED 2,1 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m³
Gross weight 12,5 Kg Net weight 9,1 Kg


Notes


0933 _ _ / 1: DALI-2 **Bi-volt**
0933 _ _ / B: Push; 1-10V **Bi-volt**

Surface.
Extra cable length.


UNTIL STOCK RUNS OUT

LED IP20 CE UK ENE

0935 	Finishes 10/ _ _ White (NCS S 0300-N) 11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y) 68/ _ _ Ocre (NCS S 3050-Y30R) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 954,5 lm CRI >90 /2 _ 3000 K - 1140 lm CRI >80 /3 _ 3500 K - 1093,7 lm CRI >90 F	Control 0935 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
	Materials Diffuser: Glass. Body: FG- Fiberglass. Canopy: Steel. Light Source and electronics 10 x LED 1 W 350 mA Constant Current 350 mA 110~240V 50/60Hz	Packaging 1 Box 1,14 x 1,14 x 0,34 m Vol 0,4410 m³ Gross weight 19,2 Kg Net weight 14,2 Kg Notes 0935 _ _ / _ 1: DALI-2 Bi-volt 0935 _ _ / _ B: Push; 1-10V Bi-volt Surface. Extra cable length. UNTIL STOCK RUNS OUT LED IP20 CE UK ENE	

0937 	Finishes 10/ _ _ White (NCS S 0300-N) 11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y) 68/ _ _ Ocre (NCS S 3050-Y30R) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 2355,86 lm F CRI >90 /2 _ 3000 K - 2121,6 lm G CRI >80 /3 _ 3500 K - 2699,4 lm F CRI >90	Control 0937 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
	Materials Diffuser: Glass. Body: FG- Fiberglass. Canopy: Steel. Light Source and electronics 13 x LED 2,1W 700mA Constant Current 700 mA 110~240V 50/60Hz	Packaging 1 Box 0,22 x 0,48 x 1,20 m Vol 0,1267 m³ Gross weight 12,5 Kg Net weight 18,46 Kg Notes Surface. Extra cable length. UNTIL STOCK RUNS OUT LED IP20 CE UK ENE	

0940



Finishes

- 10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.

Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1 _ 2700 K - 2099,9 lm
CRI >90
/2 _ 3000 K - 2508 lm
CRI >80
/3 _ 3500 K - 2406,1 lm
CRI >90



Control

0940 _ _ / _ _

- _ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

22 x LED 1 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 1,14 x 1,14 x 0,34 m
Vol 0,4420 m³
Gross weight 29,9 Kg Net weight 21,9 Kg



Notes

0940 _ _ / _ 1: DALI-2 **Bi-volt**
0940 _ _ / _ B: Push; 1-10V **Bi-volt**

Surface.

Extra cable length.

UNTIL STOCK RUNS OUT

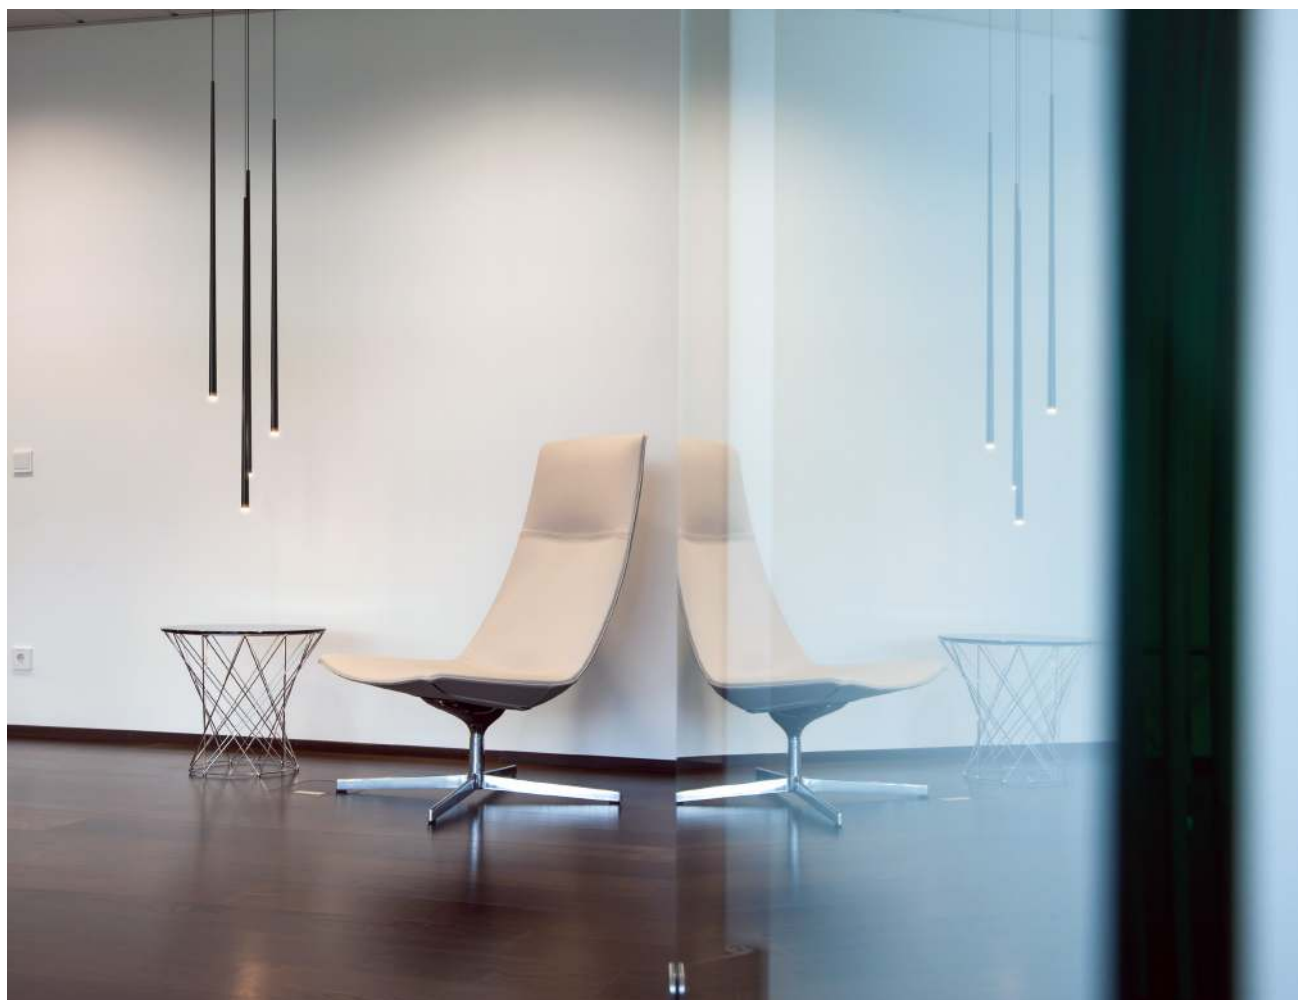


Top

Design by Ramos & Bassols

Soft, spherical shapes and a warm luminescence characterize the Top collection. Its glowing epicenter is encircled by a larger ring, lending the look of framing the light within its pure geometry.

Ceiling Wall

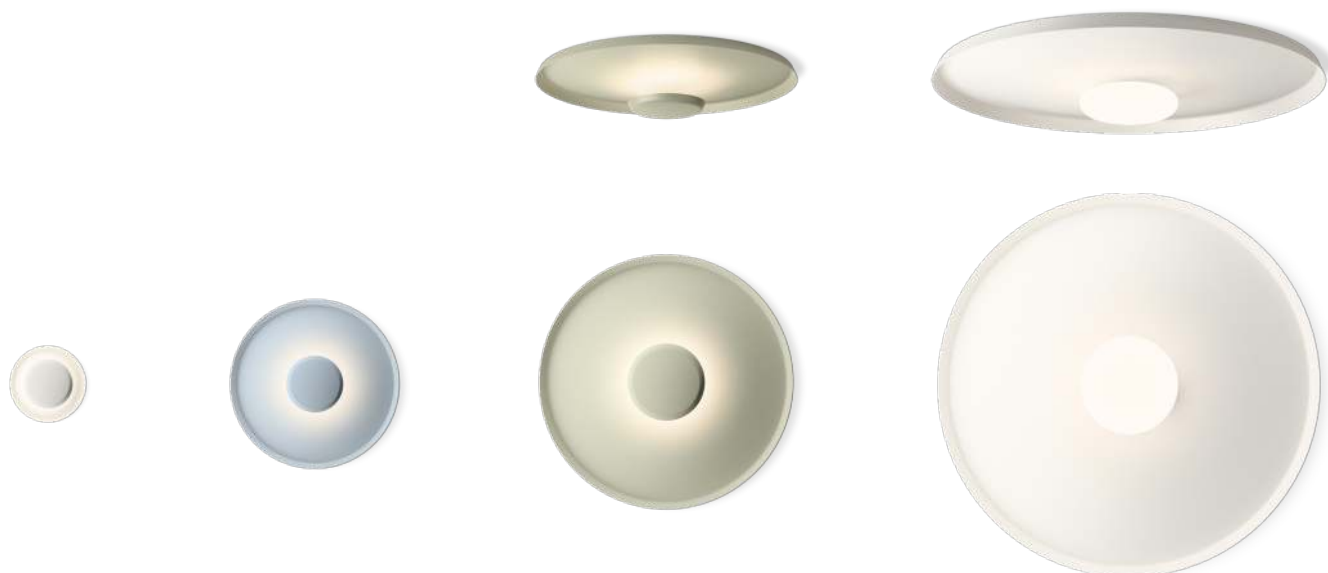

1154

Ø 17 cm

1155

Ø 40 cm


1160

Ø 60 cm

1170

Ø 90 cm

1154	Finishes 10/ _ _ White (NCS S 0300-N) 36/ _ _ Soft pink (NCS S 1010-Y50R) 40/ _ _ Blue L1 (NCS S 3010-B) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 550 lm E /3 _ 3500 K - 540,2 lm F CRI >90	Control 1154 _ _ / _ 0 On/ Off
	Materials Body: Aluminum. Light Source and electronics 1 x LED PLATE 5,5 W 150 mA Constant Current 150 mA 100~240V 50/60Hz	Packaging 1 Box 0,2 x 0,2 x 0,1 m Vol 0,004 m³ Gross weight 0,8 Kg Net weight 0,5 Kg LED IP20 CE UK EAC	
1155	Finishes 10/ _ _ White (NCS S 0300-N) 36/ _ _ Soft pink (NCS S 1010-Y50R) 40/ _ _ Blue L1 (NCS S 3010-B) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 2050 lm F /3 _ 3500 K - 2013,4 lm G CRI >90	Control 1155 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
	Materials Body: Aluminum. Light Source and electronics 1 x LED PLATE 18,3 W 500 mA Constant Current 500 mA 220~240V 50/60Hz	Packaging 1 Box 0,45 x 0,45 x 0,15 m Vol 0,03 m³ Gross weight 1,8 Kg Net weight 1,5 Kg LED IP20 CE UK EAC	

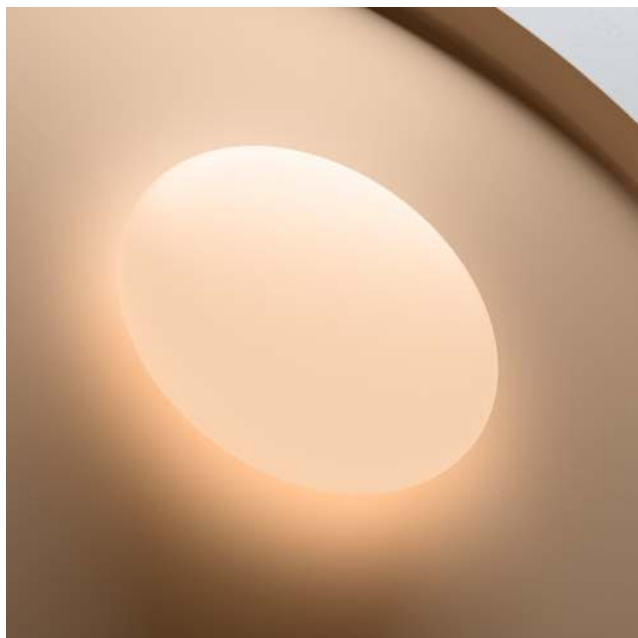

1160	Finishes 10/ _ _ White (NCS S 0300-N) 36/ _ _ Soft pink (NCS S 1010-Y50R) 40/ _ _ Blue L1 (NCS S 3010-B) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 2880 lm E /3 _ 3500 K - 2828,6 lm F CRI >90	Control 1160 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
	Materials Body: Aluminum. Light Source and electronics 1 x LED PLATE 26,4 W 700 mA Constant Current 700 mA 110-240V 50/60Hz	Packaging 1 Box 0,65 x 0,65 x 0,15 m Vol 0,063 m³ Gross weight 3,13 Kg Net weight 2,5 Kg 	
1170	Finishes 10/ _ _ White (NCS S 0300-N) 36/ _ _ Soft pink (NCS S 1010-Y50R) 40/ _ _ Blue L1 (NCS S 3010-B) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 4056,81 lm F /3 _ 3500 K - 4243,6 lm G CRI >90	Control 1170 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
	Materials Body: Aluminum. Light Source and electronics 3 x LED 13,4 W 700 mA Constant Current 700 mA 220-240V 50/60Hz	Packaging 1 Box 1 x 1 x 0,2 m Vol 0,02 m³ Gross weight 7,7 Kg Net weight 5,3 Kg 	

Jazz

Design by Diego Fortunato

Undulating and fluid, Jazz’s smooth silhouette is strikingly organic. The gently curved design imparts a playful presence, like an oversized chess piece standing guard.

Floor



1329

Ø 25 x 190 cm

1329	Finishes 10 White (NCS S 0300-N) 25 Beige D1 (NCS S 4005-Y50R) 45 Blue D1 (NCS S 7010-B10G)	LED Colour Temperature /1 _ 2700 K - 3736 lm E >>> CRI >90	Control 1329 _ _ / _ _ _ _ / 15 Push _ _ / 12 Casambi
	Materials Body: PU- Polyurethane. Diffuser: PC- Polycarbonate.		Packaging 2 Boxes Total Vol 0,1880 m³ Gross weight 19,8 Kg Net weight 15 Kg
	Light Source and electronics 1 x LED 37,2W 1050 mA Constant Current 1050 mA 100~240Vac 50/60Hz		Notes 1329 _ _ / 15: Push Bi-volt Dimmer on the cable. Electric cable 2,5 m.



Flamingo

Design by Antoni Arola

Displaying the elegant poise of the bird that inspired it, Flamingo projects a feeling of weightlessness hovering overhead. The deconstructed design separates the LED light source from its translucent shades, producing gradations of diffuse illumination.

Pendant

1510

Ø 70 cm



1527

Ø 90 cm




1530

Ø 90 cm



1540

Ø 70 cm

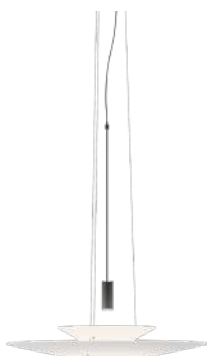

1550

Ø 90 cm



1560

Ø 90 cm




1570

Ø 90 cm



1510	Finishes 18/ _ _ Graphite (RAL 7016) 20/ _ _ Gold (Gold) 67/ _ _ Copper (Copper) 93/ _ _ White (RAL 9016)	LED Colour Temperature /1 _ 2700 K - 1108,02 lm /3 _ 3500 K - 1278,8 lm  CRI >90	Control 1510 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
	Materials Diffuser: PMMA. Body: Aluminum. Canopy and rods: Steel. Light Source and electronics 2 x LED 5,6 W 500 mA Constant Current 500 mA 110~240V 50/60Hz		Packaging 2 Boxes Total Vol 0,1320 m³ Gross weight 8,7 Kg Net weight 7,8 Kg Notes 1510 _ _ / _ 1: DALI-2  1510 _ _ / _ B: Push; 1-10V  Extra cable length.      
1527	Finishes 18/ _ _ Graphite (RAL 7016) 20/ _ _ Gold (Gold) 67/ _ _ Copper (Copper) 93/ _ _ White (RAL 9016)	LED Colour Temperature /1 _ 2700 K - 1108,02 lm /3 _ 3500 K - 1278,8 lm  CRI >90	Control 1527 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
	Materials Diffuser: PMMA. Body: Aluminum. Canopy and rods: Steel. Light Source and electronics 2 x LED 5,6 W 500 mA Constant Current 500 mA 110~240V 50/60Hz		Packaging 1 Box 0,12 x 0,80 x 0,79 m Vol 0,0634 m³ Gross weight 4,1 Kg Net weight 3,69 Kg Notes 1527 _ _ / _ 1: DALI-2  1527 _ _ / _ B: Push; 1-10V  Extra cable length.      
1530	Finishes 18/ _ _ Graphite (RAL 7016) 20/ _ _ Gold (Gold) 67/ _ _ Copper (Copper) 93/ _ _ White (RAL 9016)	LED Colour Temperature /1 _ 2700 K - 1662,03 lm /3 _ 3500 K - 1918,2 lm  CRI >90	Control 1530 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
	Materials Diffuser: PMMA. Body: Aluminum. Canopy and rods: Steel. Light Source and electronics 3 x LED 5,6 W 500 mA Constant Current 500 mA 220~240V 50/60Hz		Packaging 3 Boxes Total Vol 0,1520 m³ Gross weight 10 Kg Net weight 7 Kg Notes Extra cable length.      

1540



Finishes

18/ __ Graphite
(RAL 7016)
20/ __ Gold
(Gold)
67/ __ Copper
(Copper)
93/ __ White
(RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 554,01 lm
/3 _ 3500 K - 639,4 lm
F >90

Control

1540 __ / __
__ / _ **1** DALI-2
__ / _ **B** Push; 1-10V
__ / _ **Z** Casambi

Materials

Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics

1 x LED 5,6 W 500 mA
Constant Current 500 mA
110-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0620 m³
Gross weight 6 Kg Net weight 4 Kg

Notes

1540 __ / _ 1: DALI-2 **Bi-volt**
1540 __ / _ B: Push; 1-10V **Bi-volt**
Extra cable length.

LED **IP20** **CE** **UK** **ErC** **RoHS**

1550

Finishes

18/ __ Graphite
(RAL 7016)
20/ __ Gold
(Gold)
67/ __ Copper
(Copper)
93/ __ White
(RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 1662,03 lm
/3 _ 3500 K - 1918,2 lm
F >90

Control

1550 __ / __
__ / _ **1** DALI-2
__ / _ **B** Push; 1-10V
__ / _ **Z** Casambi

Materials

Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics

3 x LED 5,6 W 500 mA
Constant Current 500 mA
220-240V 50/60Hz

Packaging

3 Boxes
Total Vol 0,1520 m³
Gross weight 11,3 Kg Net weight 8,8 Kg

Notes

Extra cable length.

LED **IP20** **CE** **UK** **ErC** **RoHS**

1560

Finishes

18/ __ Graphite
(RAL 7016)
20/ __ Gold
(Gold)
67/ __ Copper
(Copper)
93/ __ White
(RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 1662,03 lm
/3 _ 3500 K - 1918,2 lm
F >90

Control

1560 __ / __
__ / _ **1** DALI-2
__ / _ **B** Push; 1-10V
__ / _ **Z** Casambi

Materials

Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics

3 x LED 5,6 W 500 mA
Constant Current 500 mA
220-240V 50/60Hz

Packaging

3 Boxes
Total Vol 0,1860 m³
Gross weight 12,7 Kg Net weight 10,2 Kg

Notes

Extra cable length.

LED **IP20** **CE** **UK** **ErC** **RoHS**

1570

Finishes

18/ __ Graphite
(RAL 7016)
20/ __ Gold
(Gold)
67/ __ Copper
(Copper)
93/ __ White
(RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 2216,04 lm
/3 _ 3500 K - 2557,6 lm
F >90

Control

1570 __ / __
__ / _ **1** DALI-2
__ / _ **B** Push; 1-10V
__ / _ **Z** Casambi

Materials

Diffuser: PMMA. Shade: PMMA.
Body: Aluminum. Canopy and rods: Steel.

Light Source and electronics

4 x LED 5,6 W 500 mA
Constant Current 500 mA
110-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1633 m³
Gross weight 10 Kg Net weight 8,64 Kg

Notes

Extra cable length.

LED **IP20** **CE** **UK** **ErC** **RoHS**



Flamingo Mini

Design by Antoni Arola

Flamingo Mini creates multi-layered silhouettes with an avant-garde, intriguing aesthetic. This hanging lamp recalls a bird hovering overhead, bringing an intimate ambience as it casts diffuse gradations of soothing light through its translucent diffuser.

Pendant



1575	Finishes 11/ _ _ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 726 lm  CRI >90	Control 1575 _ _ / _ _ _ _ / 11 DALI-2 _ _ / 1B Push; 1-10V _ _ / 1Z Casambi
	 Select Eletrical connection  Surface  Built-in XS		
Materials Diffuser: PMMA. Rods: Stainless steel. Body: Aluminum. Canopy: ABS.		Packaging 2 Boxes Box 1: 0,07 x 0,07 x 1,25 m Box 2: 0,51 x 0,51 x 0,16 m Total Vol 0,0478 m³ Gross weight 5,5 Kg Net weight 4 Kg	
Light Source and electronics 2 x LED 3W 175 mA Constant current 350 mA 110~240Vac 50/60Hz		Notes 1575 _ _ / 11: DALI-2 Bi-volt 1575 _ _ / 1B: Push; 1-10V Bi-volt Additional cable length personalisation	
  IP20    			

1580

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1_ 2700 K - 726 lm



CRI >90

Control

1580 _ _ / _ _

_ _ / 11 DALI-2

_ _ / 1B Push; 1-10V

_ _ / 1Z Casambi

Select Electrical connection



Surface



Built-in XS

Materials

Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.

Light Source and electronics

2 x LED 3W 175 mA
Constant current 350 mA
110~240Vac 50/60Hz

Packaging


2 Boxes
Box 1: 0,068 x 0,068 x 1,25 m
Box 2: 0,20 x 0,21 x 0,13 m
Total Vol 0,0112 m³
Gross weight 4 Kg Net weight 3 Kg

Notes

1580 _ _ / 11: DALI-2 **Bi-volt**

1580 _ _ / 1B: Push; 1-10V **Bi-volt**

Additional cable length
personalisation



1585

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1_ 2700 K - 726 lm



CRI >90

Control

1585 _ _ / _ _

_ _ / 11 DALI-2

_ _ / 1B Push; 1-10V

_ _ / 1Z Casambi

Select Electrical connection



Surface



Built-in XS

Materials

Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.

Light Source and electronics

2 x LED 3W 175 mA
Constant current 350 mA
110~240Vac 50/60Hz

Packaging


2 Boxes
Box 1: 0,07 x 0,07 x 1,25 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0478 m³
Gross weight 5,5 Kg Net weight 4 Kg

Notes

1585 _ _ / 11: DALI-2 **Bi-volt**

1585 _ _ / 1B: Push; 1-10V **Bi-volt**

Additional cable length
personalisation



1160	10	/1A	18
Model	Finish	LED Colour Temperature	Control
			Electrical connection
			Only for pendant

1590

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 1152 lm

E

CRI >90

Control

1590 _ _ / _ _

_ _ / 11 DALI-2

_ _ / 1B Push; 1-10V

_ _ / 1Z Casambi

⚡

Select Eletrical connection





Surface

Built-in XS

Materials

Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.

Light Source and electronics

3 x LED COB 3W 185 mA
Constant Current 550 mA
110~240Vac 50/60Hz

Packaging

2 Boxes
Box 1: 0,07 x 0,07 x 1,60 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0494 m³
Gross weight 6,5 Kg Net weight 5 Kg

Notes

1590 _ _ / 11: DALI-2 **Bi-volt**

1590 _ _ / 1B: Push; 1-10V **Bi-volt**

Additional cable length
personalisation

LED ☐ IP20    

⚡ Select Eletrical connection

Choose your preferred installation option according to your needs.

Drop ceiling

Regular ceiling



Ø 8 cm
height 6 cm
black finish.



Ø 16 cm
black finish.

Built-in



Pin


Design by Ichiro Iwasaki

A timeless proposal from Japanese designer Ichiro Iwasaki, the Pin is both classic and contemporary. Characterised by a graceful stem and subtle, functional expression, it is small in scale but with exceptional lighting efficiency.

Table



1650
23 x 55 cm

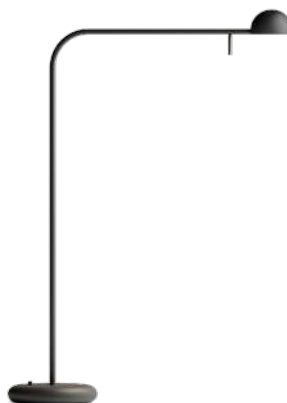

1655
40 x 55 cm

1650	Finishes 11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 58/ _ _ Cream (NCS S 2005-Y20R) 62/ _ _ Green (NCS S 3010-G20Y) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 485 lm  CRI >90 Control 1650 _ _ / 10 On/ Off
	Materials Head: Aluminum. Base: Zinc Alloy. Diffuser: PC- Polycarbonate. Rod: Steel. Light Source and electronics 1 x LED 4,5 W 350 mA Constant Current 350 mA 100~240V 50/60Hz	Packaging 1 Box 0,174 x 0,212 x 0,713 m Vol 0,0212 m³ Gross weight 2,94 Kg Net weight 2 Kg Notes Switch on the base. Electric cable 3 m     



1160 | 10 | /1A
 Model | Finish |
 LED Colour Temperature | Control |

1655

Finishes

11/ _ _ Black
 (NCS S 8500-N)
23/ _ _ Warm White
 (NCS S 0502-Y50R)
58/ _ _ Cream
 (NCS S 2005-Y20R)
62/ _ _ Green
 (NCS S 3010-G20Y)

Finish customization

(Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

Materials

Head: Aluminum. Base: Zinc Alloy.
 Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
 Constant Current 350 mA
 100-240V 50/60Hz

LED Colour Temperature

/1 _ 2700 K - 485 lm

 CRI >90

Control

1655 _ _ / 10 On/ Off

Packaging

1 Box 0,20 x 0,357 x 0,67 m
 Vol 0,0480 m³
 Gross weight 3,68 Kg Net weight 2,2 Kg

Notes

Switch on the base. Electric cable 3 m

LED IP20 Bi-volt

Floor



1660	Finishes 11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 58/ _ _ Cream (NCS S 2005-Y20R) 62/ _ _ Green (NCS S 3010-G20Y) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)		
	LED Colour Temperature /1 _ 2700 K - 485 lm  CRI >90		
	Control 1660 _ _ / 10 On/ Off		
	Materials Head: Aluminum. Base: Zinc Alloy. Diffuser: PC- Polycarbonate. Rod: Steel. Light Source and electronics 1 x LED 4,5 W 350 mA Constant Current 350 mA 100~240V 50/60Hz		
		Packaging 1 Box 0,149 x 0,265 x 0,33 m Vol 0,1310 m³ Gross weight 7,45 Kg Net weight 3,8 Kg Notes Switch on the cable. Electric cable 3 m	
		    	



1670

Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)

Finish customization

(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rods: Steel.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
100-240V 50/60Hz

LED Colour Temperature

/1 _ 2700 K - 970 lm

CRI >90

Control

1670 _ _ / 10 On/ Off

Packaging

1 Box 1,496 x 0,265 x 0,33 m
Vol 0,1310 m³
Gross weight 8,25 Kg Net weight 4,6 Kg

Notes

Switch on the cable. Electric cable 3 m

LED  IP20     Bi-volt

Wall



Ø 10 cm

1675 62



Ø 10 cm

1675 11



Ø 10 cm

1675 58



Ø 10 cm

1675 23



25 x 39 cm

1680



30 x 70 x 8 cm

1685



30 x 70 x 8 cm

1686




Ø 10 x 40 x 8 cm

1690



Ø 10 x 70 x 8 cm


1692

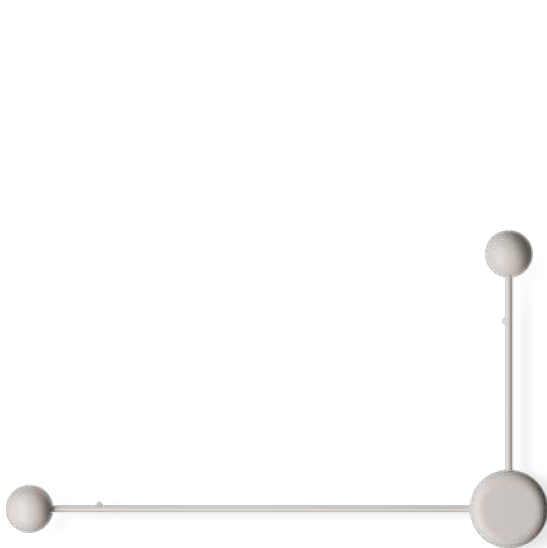

70 x 40 x 8 cm

1694

1675



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 485 lm

CRI >90

Control

1675 _ _ / **10** On/ Off

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging


1 Box 0,193 x 0,148 x 0,161 m
Vol 0,0046 m³
Gross weight 0,85 Kg Net weight 0,6 Kg

Notes

Switch on the wall plate

1680



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 485 lm

CRI >90

Control

1680 _ _ / **10** On/ Off

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging


1 Box 0,146 x 0,355 x 0,473 m
Vol 0,0250 m³
Gross weight 1,745 Kg Net weight 1 Kg

Notes

Switch on the wall plate

1685



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 970 lm

CRI >90

Control

1685 _ _ / **10** On/ Off

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz



Packaging

1 Box 0,177 x 0,445 x 0,792 m
Vol 0,0620 m³
Gross weight 2,64 Kg Net weight 1,2 Kg


Notes

Switch on the wall plate

1686 	Finishes 11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 58/ _ _ Cream (NCS S 2005-Y20R) 62/ _ _ Green (NCS S 3010-G20Y) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 970 lm E CRI >90	Control 1686 _ _ / 10 On/ Off Packaging 1 Box 0,177 x 0,445 x 0,792 m Vol 0,0620 m³ Gross weight 2,64 Kg Net weight 1,2 Kg Notes Switch on the wall plate LED ⓘ IP20 CE UK ENEC
1690 	Finishes 11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 58/ _ _ Cream (NCS S 2005-Y20R) 62/ _ _ Green (NCS S 3010-G20Y) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 485 lm E CRI >90	Control 1690 _ _ / 10 On/ Off Packaging 1 Box 0,146 x 0,355 x 0,473 m Vol 0,0250 m³ Gross weight 1,545 Kg Net weight 0,8 Kg Notes 1 x LED 4,5 W 350 mA Constant Current 350 mA 100~240V 50/60Hz LED ⓘ IP20 CE UK ENEC Bi-volt

1692



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 485 lm



CRI >90

Control

1692 _ _ / 10 On/ Off

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics


1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,177 x 0,445 x 0,792 m
Vol 0,620 m³
Gross weight 2,44 Kg Net weight 1 Kg

LED IP20 CE UK ENEC Bi-volt

1694



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 970 lm



CRI >90

Control

1694 _ _ / 10 On/ Off

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,177 x 0,445 x 0,792 m
Vol 0,620 m³
Gross weight 2,84 Kg Net weight 1,4 Kg

LED IP20 CE UK ENEC

Offset


Design by Xuclà

Offset combines intuitive lighting with an industrial, geometric silhouette. A complementary system of superficial ceiling, wall and floor fixtures, the collection integrates five lighting effects with advanced colour and temperature regulation for a carefully curated atmosphere.

Ceiling - Accent Downlight




1720 UGR <20	Finishes	LED Colour Temperature	Control
	11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/1 _ 2700 K - 451 lm /2 _ 3000 K - 471 lm /3 _ 3500 K - 489 lm CRI >90	1720 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 5 Push _ _ / _ Z Casambi
Materials		Packaging	
Body: Aluminum.		1 Box 0,10 x 0,08 x 0,325 m	
Light Source and electronics		Vol 0,003 m³	
1 x LED 2,9 W 250 mA		Gross weight 1 Kg Net weight 0,4 Kg	
Constant Current 250 mA			
220~240V 50/60Hz			




1722

Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature /1 _ 2700 K - 1353 lm /2 _ 3000 K - 1413 lm /3 _ 3500 K - 1467 lm E CRI >90	Control 1722 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 5 Push _ _ / _ Z Casambi
Materials Body: Aluminum. Light Source and electronics 3 x LED 2,9 W 250 mA Constant Current 250 mA 220~240V 50/60Hz	Packaging 1 Box 0,10 x 0,08 x 0,325 m Vol 0,003 m³ Gross weight 1,1 Kg Net weight 0,6 Kg LED IP20 CE UK ENE	

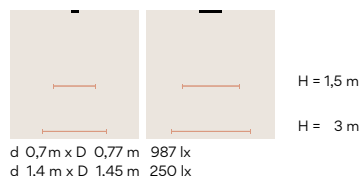


1725

Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature /1 _ 2700 K - 902 lm /2 _ 3000 K - 942 lm /3 _ 3500 K - 978 lm E CRI >90	Control 1725 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 5 Push _ _ / _ Z Casambi
Materials Body: Aluminum. Light Source and electronics 2 x LED 2,9 W 250 mA Constant Current 250 mA 220~240V 50/60Hz	Packaging 1 Box 0,20 x 0,21 x 0,13 m Vol 0,005 m³ Gross weight 1,2 Kg Net weight 0,6 Kg LED IP20 CE UK ENE	

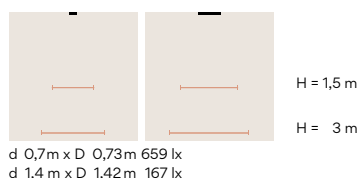

1727	Finishes	LED Colour Temperature	Control
	11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/1 _ 2700 K - 902 lm /2 _ 3000 K - 942 lm /3 _ 3500 K - 978 lm E CRI >90	1727 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 5 Push _ _ / _ Z Casambi
	Materials	Packaging	
	Body: Aluminum.	1 Box 0,20 x 0,21 x 0,13 m	
	Light Source and electronics	Vol 0,005 m³	
	2 x LED 2,9 W 250 mA	Gross weight 1,2 Kg Net weight 0,6 Kg	
	Constant Current 250 mA	LED	
	220~240V 50/60Hz	IP20	
		CE UK ENEC	

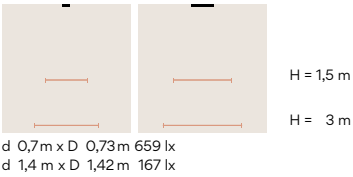

Ceiling - High Comfort Diffuser



1728

40 x 4 x 7 cm




1730

65 x 4 x 7 cm




1735

100 x 4 x 7 cm



1740

31 x 15 x 7 cm



1745

31 x 15 x 7 cm

1728
UGR <21

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **23/** _ _ Warm White
(NCS S 0502-Y50R)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

- /1** _ 2700 K - 1674 lm
- /2** _ 3000 K - 1733 lm
- /3** _ 3500 K - 1791 lm



Tunable White

- /8** _ (2200 K - 4000 K)
921 lm - 1075 lm



CRI >90

Control

1728 _ _ / _ _

_ _ / _ **1** DALI-2

_ _ / _ **5** Push

_ _ / _ **Z** Casambi

_ _ / **81** Tunable White +
DALI-2 DT8

_ _ / **8Z** Tunable White +
Casambi

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.


Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220-240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220-240V 50/60Hz

Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m³
Gross weight 1,6 Kg Net weight 0,8 Kg



1730
UGR <24

Finishes 11/ __ Black (NCS S 8500-N) 23/ __ Warm White (NCS S 0502-Y50R) 24/ __ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature Static White /1 _ 2700 K - 3348 lm /2 _ 3000 K - 3466 lm /3 _ 3500 K - 3582 lm E Tunable White /8 _ (2200 K - 4000 K) 1842 lm - 2150 lm F CRI >90	Control 1730 __ / __ __ / _ 1 DALI-2 __ / _ 5 Push __ / _ Z Casambi __ / 81 Tunable White + DALI-2 DT8 __ / 8Z Tunable White + Casambi
Materials Body: Aluminum. Diffuser: PC- Polycarbonate. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 27,4W 650mA Constant Current 650 mA 220-240V 50/60Hz Tunable White: 1 x LED STRIP 20,8W Constant Voltage 24 VDC 220-240V 50/60Hz		Packaging 1 Box 0,105 x 0,08 x 1,095 m Vol 0,009198 m³ Gross weight 2,1 Kg Net weight 1,4 Kg LED  IP20   EAC 

1735

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 5022 lm

/2 _ 3000 K - 5199 lm

/3 _ 3500 K - 5373 lm

E

Tunable White

/8 _ (2200 K - 4000 K)

2763 lm - 3225 lm

F

CRI >90

Control

1735 _ _ / _ _

/ _ 1 DALI-2

/ _ 5 Push

/ _ Z Casambi

/ _ 81 Tunable White + DALI-2 DT8

/ _ 8Z Tunable White + Casambi

Materials

Body: Aluminum.

Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED STRIP 41,1 W 650 mA

Constant Current 650 mA

220-240V 50/60Hz

Tunable White:

1 x LED STRIP 31,2 W

Constant Voltage 24 VDC

220-240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m

Vol 0,009198 m³

Gross weight 2,9 Kg Net weight 1,8 Kg

LED



IP20





EAC



1740
UGR <21

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 23/  Warm White (NCS S 0502-Y50R) 24/  Beige M1 (NCS S 2005-Y50R)	Static White /1 2700 K - 1674 lm /2 3000 K - 1733 lm /3 3500 K - 1791 lm E  Tunable White /8 (2200 K - 4000 K) 921 lm - 1075 lm F  CRI >90	1740     -- / 1 DALI-2 -- / 5 Push -- / Z Casambi -- / 81 Tunable White + DALI-2 DT8 -- / 8Z Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m³
Gross weight 1,6 Kg Net weight 0,8 Kg

LED  IP20    

1745
UGR <21

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 23/  Warm White (NCS S 0502-Y50R) 24/  Beige M1 (NCS S 2005-Y50R)	Static White /1 2700 K - 1674 lm /2 3000 K - 1733 lm /3 3500 K - 1791 lm E  Tunable White /8 (2200 K - 4000 K) 921 lm - 1075 lm F  CRI >90	1745     -- / 1 DALI-2 -- / 5 Push -- / Z Casambi -- / 81 Tunable White + DALI-2 DT8 -- / 8Z Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m³
Gross weight 1,6 Kg Net weight 0,8 Kg

LED  IP20    


Ceiling - Linear High Efficiency Low Glare



1729
UGR <18

Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	Static White	1729 _ _ / _ _
● 23/ _ _ Warm White (NCS S 0502-Y50R)	/1 _ 2700 K - 3348 lm	_ _ / _ 1 DALI-2
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 3466 lm	_ _ / _ 5 Push
	/3 _ 3500 K - 3582 lm	_ _ / _ Z Casambi
	Tunable White	
	/8 _ (2200 K - 4000 K)	_ _ / 81 Tunable White + DALI-2 DT8
	1842 lm - 2150 lm	_ _ / 8Z Tunable White + Casambi
	F >90	

Materials	Packaging
Body: Aluminum.	1 Box 0,42 x 0,29 x 0,10 m
Diffuser: PC- Polycarbonate.	Vol 0,01218 m³
	Gross weight 1,6 Kg Net weight 0,8 Kg
Light Source and electronics	LED ⓘ IP20 CE UK ENEC
2700 K - 3000 K - 3500K:	
1 x LED STRIP 13,7 W 650 mA	
Constant Current 650 mA	
220~240V 50/60Hz	
Tunable White:	
1 x LED STRIP 10,4 W	
Constant Voltage 24 VDC	
220~240V 50/60Hz	

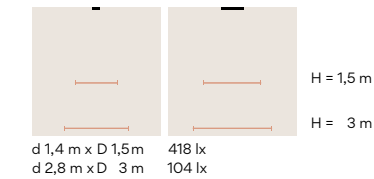

1732
UGR <20

Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	Static White /1_ 2700 K - 3348 lm /2_ 3000 K - 3466 lm /3_ 3500 K - 3582 lm E  Tunable White /8_ (2200 K - 4000 K) 1842 lm - 2150 lm F  CRI >90	1732 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 5 Push _ _ / _ Z Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics



2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz


Tunable White:
1 x LED STRIP 20,8 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m³
Gross weight 2,1 Kg Net weight 1,4 Kg

LED  IP20    


		H = 1,5 m
d 1,4 m x D 1,5 m	836 lx	
d 2,8 m x D 3 m	209 lx	H = 3 m

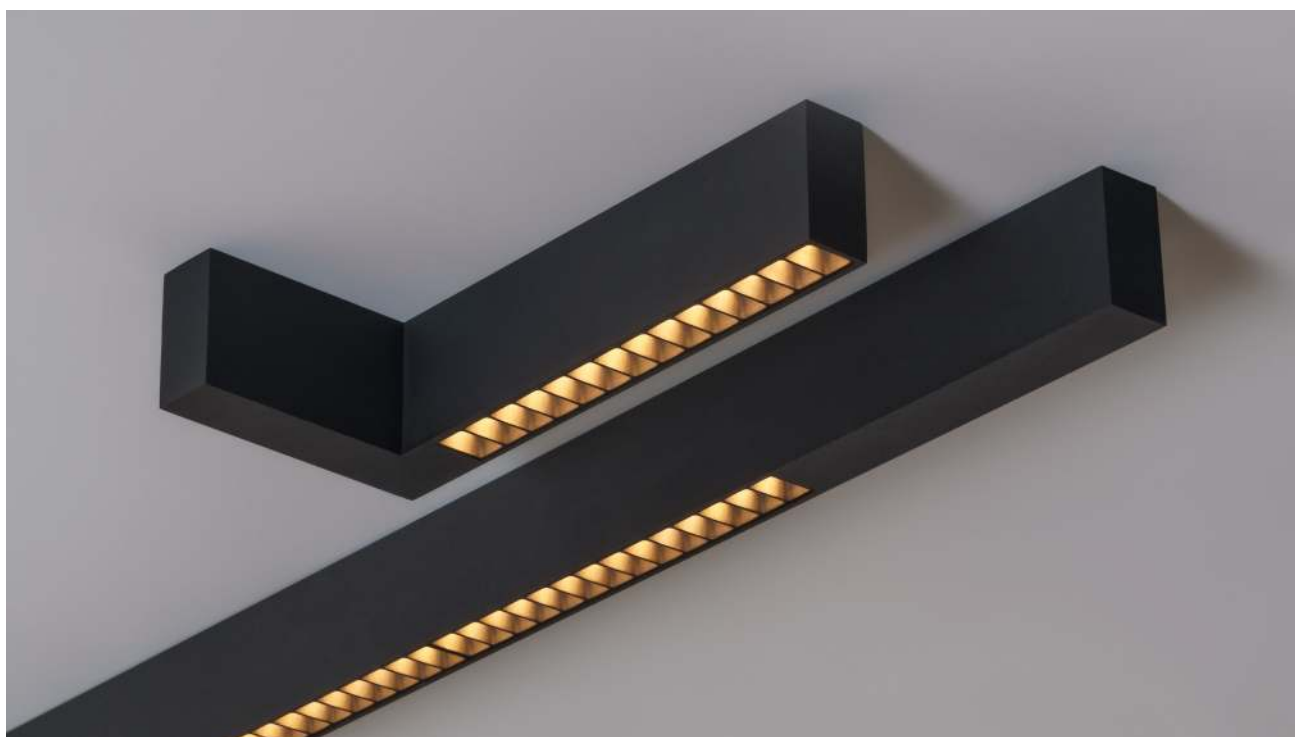

1737
UGR <20

Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	Static White /1 _ 2700 K - 5022 lm /2 _ 3000 K - 5199 lm /3 _ 3500 K - 5373 lm E	1737 _ _ / _ _
● 23/ _ _ Warm White (NCS S 0502-Y50R)	Tunable White /8 _ (2200 K - 4000 K) 2763 lm - 3225 lm F	_ _ / _ 1 DALI-2 _ _ / _ 5 Push _ _ / _ Z Casambi
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	CRI >90	_ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8Z Tunable White + Casambi

Materials	Packaging
Body: Aluminum. Diffuser: PC- Polycarbonate.	1 Box 0,105 x 0,08 x 1,095 m Vol 0,009198 m³ Gross weight 2,9 Kg Net weight 1,8 Kg
Light Source and electronics	LED IP20 CE UK ENEC
2700 K - 3000 K - 3500K: 1 x LED STRIP 41,1 W 650 mA Constant Current 650 mA 220~240V 50/60Hz	
Tunable White: 1 x LED STRIP 31,2 W Constant Voltage 24 VDC 220~240V 50/60Hz	

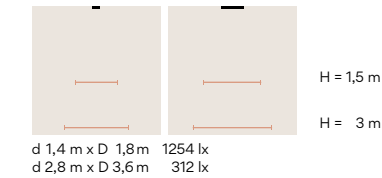

1742

Finishes	LED Colour Temperature	Control
11/ ☐ Black (NCS S 8500-N) 23/ ☐ Warm White (NCS S 0502-Y50R) 24/ ☐ Beige M1 (NCS S 2005-Y50R)	Static White /1 ☐ 2700 K - 1674 lm /2 ☐ 3000 K - 1733 lm /3 ☐ 3500 K - 1791 lm E Tunable White /8 ☐ (2200 K - 4000 K) 921 lm - 1075 lm F CRI >90	1742 / 1 DALI-2 / 5 Push / Z Casambi / 81 Tunable White + DALI-2 DT8 / 8Z Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz


Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m³
Gross weight 1,6 Kg Net weight 0,8 Kg


LED  IP20    

		H = 1,5 m
d 1,4 m x D 1,5 m	418 lx	
d 2,8 m x D 3 m	104 lx	H = 3 m

1747


Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R)		LED Colour Temperature Static White /1 _ 2700 K - 1674 lm /2 _ 3000 K - 1733 lm /3 _ 3500 K - 1791 lm E  Tunable White /8 _ (2200 K - 4000 K) 921 lm - 1075 lm F  CRI >90	Control 1747 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 5 Push _ _ / _ Z Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8Z Tunable White + Casambi
Materials Body: Aluminum. Diffuser: PC- Polycarbonate. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 13,7 W 650 mA Constant Current 650 mA 220~240V 50/60Hz Tunable White: 1 x LED STRIP 10,4 W Constant Voltage 24 VDC 220~240V 50/60Hz		Packaging 1 Box 0,42 x 0,29 x 0,10 m Vol 0,01218 m³ Gross weight 1,6 Kg Net weight 0,8 Kg       	
 H = 1,5 m H = 3 m d 1,4 m x D 1,5 m 418 lx d 2,8 m x D 3 m 104 lx			

Ceiling - Flat Diffuser



1755

125 x 4 x 7 cm

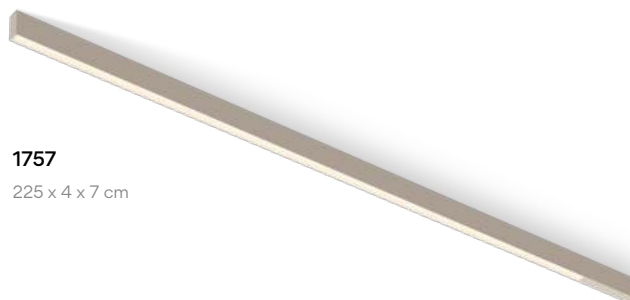

1757

225 x 4 x 7 cm

1755

Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	Static White /1 _ 2700 K - 2544 lm /2 _ 3000 K - 2628 lm /3 _ 3500 K - 2712 lm E → Tunable White /8 _ (2200 K - 4000 K) 1751,96 lm - 2395,6 lm F → CRI >90	1755 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 5 Push _ _ / _ Z Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8Z Tunable White + Casambi
Materials Body: Aluminum. Diffuser: PC- Polycarbonate.	Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 20,6 W Constant Voltage 24VDC 220~240V 50/60Hz Tunable White: 1 x LED STRIP 20,6 W Constant Voltage 24 VDC 220~240V 50/60Hz	Packaging 1 Box 0,1 x 0,106 x 1,5 m Vol 0,016 m³ Gross weight 3,5 Kg Net weight 2,1 Kg LED IP20 CE UK ENE

1757

Finishes		LED Colour Temperature		Control	
11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R)		Static White /1 _ 2700 K - 5088 lm /2 _ 3000 K - 5256 lm /3 _ 3500 K - 5424 lm		1757 _ _ / _ _	
		E		__ / _ 1 DALI-2 __ / _ 5 Push __ / _ Z Casambi	
		Tunable White /8 _ (2200 K - 4000 K) 3503,92 lm - 4791,2 lm		__ / 81 Tunable White + DALI-2 DT8 __ / 8Z Tunable White + Casambi	
		F CRI >90			
Materials Body: Aluminum. Diffuser: PC- Polycarbonate.		Packaging 1 Box 0,1 x 0,106 x 2,3 m Vol 0,024 m³ Gross weight 6,0 Kg Net weight 3,5 Kg			
Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 41,2 W 650 mA Constant Current 650 mA 220~240V 50/60Hz Tunable White: 1 x LED STRIP 41,3 W Constant Voltage 24 VDC 220~240V 50/60Hz		LED  IP20   ENEC 			



Ceiling Wall - Colour Mood Grazer



Right Left
1760 1762
7 x 125 x 5 cm



Right Left
1765 1767
7 x 225 x 5 cm

1760 Right

Finishes	LED Colour Temperature
11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/A_ Infinite Colour (TW + RGB) 1572 lm - 1940 lm 70 lm (RED) 182 lm (GREEN) 35 lm (BLUE)
	CRI >90

Control
1760 _ _ / _ Y ProtoPixel*

Materials
Diffuser: PC- Polycarbonate.
Lens: PMMA.

Light Source and electronics
1 x LED STRIP 17,2W
Constant Voltage 24VDC
220-240V 50/60Hz

Packaging
1 Box 0,117 x 0,125 x 1,3 m
Vol 0,020 m³
Gross weight 4,0 Kg Net weight 2,6 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20 CE UK ENEC

1762 Left

Finishes	LED Colour Temperature
11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/A_ Infinite Colour (TW + RGB) 1572 lm - 1940 lm 70 lm (RED) 182 lm (GREEN) 35 lm (BLUE)
	CRI >90

Control
1762 _ _ / _ Y ProtoPixel*

Materials
Diffuser: PC- Polycarbonate.
Lens: PMMA.

Light Source and electronics
1 x LED STRIP 17,2 W
Constant Voltage 24 VDC
110-240V 50/60Hz

Packaging
1 Box 0,117 x 0,125 x 1,3 m
Vol 0,020 m³
Gross weight 4,0 Kg Net weight 2,6 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20 CE UK ENEC

1765 Right	Finishes	LED Colour Temperature	Control
	● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/A _ Infinite Colour (TW + RGB) 3880 lm - 3144 lm 140 lm (RED) 364 lm (GREEN) 70 lm (BLUE) E CRI >90	1765 _ _ / _ Y ProtoPixel*
Materials		Packaging	
Diffuser: PC- Polycarbonate. Lens: PMMA.		1 Box 0,1 x 0,106 x 2,3 m Vol 0,024 m³ Gross weight 7,5 Kg Net weight 5,0 Kg	
Light Source and electronics		Notes	
1 x LED STRIP 35,4 W Constant Voltage 24 VDC 110~240V 50/60Hz		ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).	
LED IP20			

1767 Left	Finishes	LED Colour Temperature	Control
	11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R) /A_ Infinite Colour (TW + RGB) 3880 lm - 3144 lm 140 lm (RED) 364 lm (GREEN) 70 lm (BLUE) E CRI >90 1767 _ _ / _ Y ProtoPixel*		
Materials		Packaging	
Diffuser: PC- Polycarbonate. Lens: PMMA.		1 Box 0,1 x 0,106 x 2,3 m Vol 0,024 m³ Gross weight 7,5 Kg Net weight 5,0 Kg	
Light Source and electronics		Notes	
1 x LED STRIP 35,4 W Constant Voltage 24 VDC 220~240V 50/60Hz		ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).	
		LED IP20 CE UK EAC	

Wall - Up&Down Surface Grazer



1770

Finishes	LED Colour Temperature	Control
11/ _ Black (NCS S 8500-N) 23/ _ Warm White (NCS S 0502-Y50R) 24/ _ Beige M1 (NCS S 2005-Y50R)	/1 _ 2700 K - 451 lm /2 _ 3000 K - 471 lm /3 _ 3500 K - 489 lm	1770 _ / _ _ / _ 0 On/ Off _ / _ 1 DALI-2 (Remote) _ / _ 5 Push (Remote) _ / _ Z Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2 x LED 2,9 W 250 mA
Constant current 250 mA
220~240V 50/60Hz

Packaging


1 Box 0,15 x 0,095 x 0,09 m
Vol 0,0013 m³
Gross weight 0,7 Kg Net weight 0,3 Kg

LED IP20 CE UK ENEC

1772 11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	Finishes LED Colour Temperature /1 _ 2700 K - 451 lm /2 _ 3000 K - 471 lm /3 _ 3500 K - 489 lm E  CRI >90	Control 1772 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 5 Push _ _ / _ Z Casambi
	Materials Body: Aluminum. Lens: PMMA. Light Source and electronics 2 x LED 2,9 W 250 mA Constant current 250 mA 110~240V 50/60Hz	Packaging 1 Box 0,15 x 0,08 x 1,095 m Vol 0,0091 m³ Gross weight 2,6 Kg Net weight 1,5 Kg LED  IP20 CE UK ENEC 
1774	Finishes LED Colour Temperature 11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R) /1 _ 2700 K - 451 lm /2 _ 3000 K - 471 lm /3 _ 3500 K - 489 lm E  CRI >90	Control 1774 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 5 Push _ _ / _ Z Casambi Packaging 1 Box 0,117 x 0,125 x 2 m Vol 0,029 m³ Gross weight 4,1 Kg Net weight 2,3 Kg LED  IP20 CE UK ENEC 




Floor

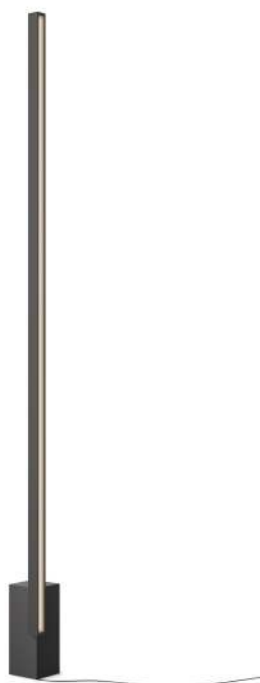

1780
14 x 218 cm



1780
14 x 218 cm

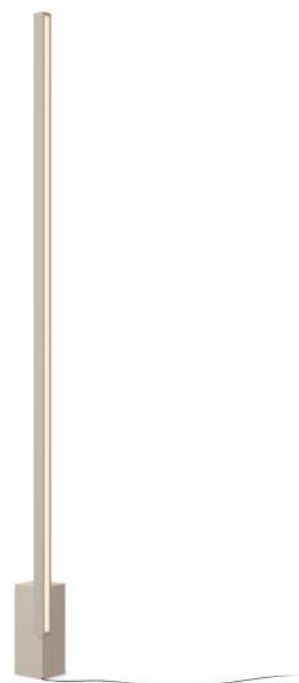

1780
14 x 218 cm

1780

Finishes

- **11/ _ _ Black**
(NCS S 8500-N)
- **23/ _ _ Warm White**
(NCS S 0502-Y50R)
- **24/ _ _ Beige M1**
(NCS S 2005-Y50R)

LED Colour Temperature

- /A _ Infinite Colour (TW + RGB)**
3880 lm - 3144 lm
- 140 lm (RED)
- 364 lm (GREEN)
- 70 lm (BLUE)
- E** →
- CRI >90

Control

- 1780 _ _ / _ Y ProtoPixel***
(also with push buttons)

Materials

Body: Aluminum.

Light Source and electronics

1 x LED STRIP 35,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,60 x 0,68 x 2,2 m
Vol 0,9 m³
Gross weight 7,0 Kg Net weight 4,3 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20 CE ENEC EAC Dimmer

Array

Design by Umut Yamac

A striking pendant of impressive proportions, Array is an exploration of thread and its potential to create lightweight and dynamic sculptures of light.

Pendant

Height 70 cm



Ø 37 cm

1800



Ø 54,5 cm


1815

Height 110 cm



Ø 37 cm

1805




Ø 54,5 cm

1820



Ø 82,5 cm

1830



Ø 124 cm

1840

Height 190 cm



Ø 37 cm

1810



Ø 54,5 cm

1825



Ø 82,5 cm

1835



Ø 124 cm

1845

Height 70 cm



Ø 54,5 cm

1850

Height 110 cm



Ø 54,5 cm

1855



Ø 82,5 cm

1865



Ø 124 cm

1875

Height 190 cm



Ø 54,5 cm

1860



Ø 82,5 cm

1870



Ø 124 cm

1880

1800	⚡		
	Finishes (threads) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R) ● 37/ _ _ Terra Red (NCS S4040-Y70R) ● 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 2662 lm D CRI >90	Control 1800 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
	Finishes (rings and canopy) ● Black (NCS S 8500-N)		
1805	⚡ Select Eletrical connection		
	 Surface  Built-in S  Remote Micro	_10 Surface _24 Built-in S _31 Remote Micro	
	Materials Upper ring: Aluminum. Bottom ring: Brass. Diffuser: PC- Polycarbonate. Threads: PES FR. Light Source and electronics 1 x LED STRIP 22W 48V Constant Voltage 48V 90~305Vac 50/60Hz	Packaging 1 Box 0,62 x 0,62 x 0,12 m Vol 0,0461 m³ Gross weight 7 Kg Net weight 4,8 Kg Notes 1800 _ _ / _ 13: 1-10V Multi-volt Extra cable length.	LED  IP20    
	Finishes (rings and canopy) ● Black (NCS S 8500-N)		
1805	⚡ Select Eletrical connection		
	 Surface  Built-in S  Remote Micro	_10 Surface _24 Built-in S _31 Remote Micro	
	Materials Upper ring: Aluminum. Bottom ring: Brass. Diffuser: PC- Polycarbonate. Threads: PES FR. Light Source and electronics 1 x LED STRIP 22W 48V Constant Voltage 48V 90~305Vac 50/60Hz	Packaging 1 Box 0,62 x 0,62 x 0,12 m Vol 0,0461 m³ Gross weight 7,3 Kg Net weight 5,1 Kg Notes 1805 _ _ / _ 13: 1-10V Multi-volt Extra cable length.	LED  IP20    

1810



Finishes (threads)
 ● 24/ _ _ Beige M1
 (NCS S 2005-Y50R)
 ● 37/ _ _ Terra Red
 (NCS S4040-Y70R)
 ● 47/ _ _ Green L1
 (NCS S 4005-G80Y)

LED Colour Temperature
 /1 _ 2700 K - 2662 lm
 ID
 CRI >90

Control

1810 _ _ / _ _
 _ _ / 13 1-10V
 _ _ / 1D Push; DALI-2
 _ _ / 1Z Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

⚡ Select Electrical connection



Surface



Built-in S



Remote
Micro

_10 Surface
 _24 Built-in S
 _31 Remote
 Micro

Materials
 Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics
 1 x LED STRIP 22W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
 Vol 0,0461 m³
 Gross weight 7,6 Kg Net weight 5,4 Kg

Notes

1810 _ _ / _ 13: 1-10V **Multi-volt**
 Extra cable length.

LED IP20 CE UK ENEC

1815



Finishes (threads)
 ● 24/ _ _ Beige M1
 (NCS S 2005-Y50R)
 ● 37/ _ _ Terra Red
 (NCS S4040-Y70R)
 ● 47/ _ _ Green L1
 (NCS S 4005-G80Y)

LED Colour Temperature
 /1 _ 2700 K - 3993 lm
 ID
 CRI >90

Control

1815 _ _ / _ _
 _ _ / 13 1-10V
 _ _ / 1D Push; DALI-2
 _ _ / 1Z Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

⚡ Select Electrical connection



Surface



Built-in S



Remote
Micro

_10 Surface
 _24 Built-in S
 _31 Remote
 Micro

Materials
 Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics
 1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
 Vol 0,0461 m³
 Gross weight 8,4 Kg Net weight 6,2 Kg

Notes

1815 _ _ / _ 13: 1-10V **Multi-volt**
 Extra cable length.

LED IP20 CE UK ENEC

1820		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 3993 lm  CRI >90	Control 1820 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	 Select Eletrical connection  Surface  Built-in S  Remote Micro 10 Surface 24 Built-in S 31 Remote Micro	
		Materials Upper ring: Aluminum. Bottom ring: Brass. Diffuser: PC- Polycarbonate. Threads: PES FR. Light Source and electronics 1 x LED STRIP 33W 48V Constant Voltage 48V 90~305Vac 50/60Hz		Packaging 1 Box 0,62 x 0,62 x 0,12 m Vol 0,0461 m³ Gross weight 8,8 Kg Net weight 6,6 Kg Notes 1820 _ _ / _ 13: 1-10V Multi-volt Extra cable length. LED  IP20    

1825		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 3993 lm  CRI >90	Control 1825 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	 Select Eletrical connection  Surface  Built-in S  Remote Micro 10 Surface 24 Built-in S 31 Remote Micro	
		Materials Upper ring: Aluminum. Bottom ring: Brass. Diffuser: PC- Polycarbonate. Threads: PES FR. Light Source and electronics 1 x LED STRIP 33W 48V Constant Voltage 48V 90~305Vac 50/60Hz		Packaging 1 Box 0,62 x 0,62 x 0,12 m Vol 0,0461 m³ Gross weight 9,2 Kg Net weight 7 Kg Notes 1825 _ _ / _ 13: 1-10V Multi-volt Extra cable length. LED  IP20    

1830



Finishes (threads)
 ● **24/** _ _ Beige M1
 (NCS S 2005-Y50R)
 ● **37/** _ _ Terra Red
 (NCS S4040-Y70R)
 ● **47/** _ _ Green L1
 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K - 6050 lm

 CRI >90

Control

1830 _ _ / _ _
 _ _ / **13** 1-10V
 _ _ / **1D** Push; DALI-2
 _ _ / **1Z** Casambi

Finishes (rings and canopy)
 ● **Black** (NCS S 8500-N)

Select Electrical connection



Surface



Built-in S



Remote
Micro

_10 Surface
 _24 Built-in S
 _31 Remote
 Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics

1 x LED STRIP 50W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz

Packaging

1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 13,5 Kg Net weight 9,5 Kg

Notes

1830 _ _ / _ 13: 1-10V **Multi-volt**
 Extra cable length.

LED **IP20** **CE** **UK** **EN**

1835



Finishes (threads)
 ● **24/** _ _ Beige M1
 (NCS S 2005-Y50R)
 ● **37/** _ _ Terra Red
 (NCS S4040-Y70R)
 ● **47/** _ _ Green L1
 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K - 6050 lm

 CRI >90

Control

1835 _ _ / _ _
 _ _ / **13** 1-10V
 _ _ / **1D** Push; DALI-2
 _ _ / **1Z** Casambi

Finishes (rings and canopy)
 ● **Black** (NCS S 8500-N)

Select Electrical connection



Surface



Built-in S



Remote
Micro

_10 Surface
 _24 Built-in S
 _31 Remote
 Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics

1 x LED STRIP 50W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz

Packaging

1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 14,1 Kg Net weight 10,1 Kg

Notes

1835 _ _ / _ 13: 1-10V **Multi-volt**
 Extra cable length.

LED **IP20** **CE** **UK** **EN**

1840		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 9196 lm CRI >90	Control 1840 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)		
		 Select Eletrical connection		
   Surface Built-in S Remote Micro		_10 Surface _24 Built-in S _31 Remote Micro		
Materials Upper ring: Aluminum. Bottom ring: Brass. Diffuser: PC- Polycarbonate. Threads: PES FR. Light Source and electronics 1 x LED STRIP 76W 48V Constant Voltage 48V 90~305Vac 50/60Hz		Packaging 1 Box 1,35 x 1,35 x 0,120 m Vol 0,2187 m³ Gross weight 19 Kg Net weight 13 Kg Notes 1840 _ _ / _ 13: 1-10V Multi-volt Extra cable length. LED  IP20    		

1845		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 9196 lm CRI >90	Control 1845 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)		
		 Select Eletrical connection		
   Surface Built-in S Remote Micro		_10 Surface _24 Built-in S _31 Remote Micro		
Materials Upper ring: Aluminum. Bottom ring: Brass. Diffuser: PC- Polycarbonate. Threads: PES FR. Light Source and electronics 1 x LED STRIP 76W 48V Constant Voltage 48V 90~305Vac 50/60Hz		Packaging 1 Box 1,35 x 1,35 x 0,120 m Vol 0,2187 m³ Gross weight 19,9 Kg Net weight 13,9 Kg Notes 1845 _ _ / _ 13: 1-10V Multi-volt Extra cable length. LED  IP20    		

1850



Finishes (threads)

- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 37/ _ _ Terra Red
(NCS S4040-Y70R)
- 47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 3993 lm
D

CRI >90

Control

1850 _ _ / _ _

_ _ / 13 1-10V

_ _ / 1D Push; DALI-2

_ _ / 1Z Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Select Electrical connection



Surface



Built-in S



Remote
Micro

_10 Surface
_24 Built-in S
_31 Remote
Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 7,9 Kg Net weight 5,7 Kg

Notes

1850 _ _ / _ 13: 1-10V Multi-volt

Extra cable length.

LED IP20 CE UK ENE

1855



Finishes (threads)

- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 37/ _ _ Terra Red
(NCS S4040-Y70R)
- 47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 3993 lm
D

CRI >90

Control

1855 _ _ / _ _

_ _ / 13 1-10V

_ _ / 1D Push; DALI-2

_ _ / 1Z Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Select Electrical connection



Surface



Built-in S



Remote
Micro

_10 Surface
_24 Built-in S
_31 Remote
Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 8,3 Kg Net weight 6,1 Kg

Notes

1855 _ _ / _ 13: 1-10V Multi-volt

Extra cable length.

LED IP20 CE UK ENE

1860		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 3993 lm CRI >90	Control 1860 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 6050 lm CRI >90	Control 1865 _ _ / _ _ _ _ / 13 1-10V _ _ / 1D Push; DALI-2 _ _ / 1Z Casambi
		Finishes (rings and canopy) Black (NCS S 8500-N)	SurfaceBuilt-in SRemote Micro	

10 Surface

24 Built-in S

31 Remote Micro

		Finishes (threads) 24/ _ _ Beige M1 (NCS S 2005-Y50R)
--	---	--

10 Surface

24 Built-in S

31 Remote Micro

1870



Finishes (threads)
 ● **24/** _ _ Beige M1
 (NCS S 2005-Y50R)
 ● **37/** _ _ Terra Red
 (NCS S4040-Y70R)
 ● **47/** _ _ Green L1
 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K - 6050 lm

 CRI >90

Control

1870 _ _ / _ _
 _ _ / **13** 1-10V
 _ _ / **1D** Push; DALI-2
 _ _ / **1Z** Casambi

Finishes (rings and canopy)
 ● **Black** (NCS S 8500-N)

Select Electrical connection



Surface



Built-in S



Remote
Micro

_10 Surface
 _24 Built-in S
 _31 Remote
 Micro

Materials
 Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics
 1x LED STRIP 50W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz

Packaging

1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 12,4 Kg Net weight 9,4 Kg

Notes

1870 _ _ / _13: 1-10V **Multi-volt**
 Extra cable length.

LED **IP20**

1875



Finishes (threads)
 ● **24/** _ _ Beige M1
 (NCS S 2005-Y50R)
 ● **37/** _ _ Terra Red
 (NCS S4040-Y70R)
 ● **47/** _ _ Green L1
 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K - 9196 lm

 CRI >90

Control

1875 _ _ / _ _
 _ _ / **13** 1-10V
 _ _ / **1D** Push; DALI-2
 _ _ / **1Z** Casambi

Finishes (rings and canopy)
 ● **Black** (NCS S 8500-N)

Select Electrical connection



Surface



Built-in S



Remote
Micro

_10 Surface
 _24 Built-in S
 _31 Remote
 Micro

Materials
 Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics
 1x LED STRIP 76W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz

Packaging

1 Box 1,35 x 1,35 x 0,12 m
 Vol 0,2187 m³
 Gross weight 15,9 Kg Net weight 11,9 Kg

Notes

1875 _ _ / _13: 1-10V **Multi-volt**
 Extra cable length.

LED **IP20**

1160	10	/1A	18
Model	Finish	LED Colour Temperature	Control
Electrical connection Only for pendants			

1880

Finishes (threads)

24/ _ _ Beige M1

(NCS S 2005-Y50R)

37/ _ _ Terra Red

(NCS S4040-Y70R)

47/ _ _ Green L1

(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 9196 lm

CRI >90

Control

1880 _ _ / _ _

_ _ / 13 1-10V

_ _ / 1D Push; DALI-2

_ _ / 1Z Casambi

Finishes (rings and canopy)

Black (NCS S 8500-N)

Select Electrical connection

Surface

Built-in S

Remote Micro

_10 Surface

_24 Built-in S

_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 1,35 x 1,35 x 0,12 m
Vol 0,2187 m³
Gross weight 16,8 Kg Net weight 12,8 Kg

Notes

1880 _ _ / _ 13: 1-10V

Multi-volt

Extra cable length.

LED

IP20

EAC

Select Electrical connection

Choose your preferred installation option according to your needs.

Drop ceiling

Regular ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.



Ø 12 cm
height 6 cm

black finish.



Ø 25,5 cm
height 4,5 cm

black finish.



Ø 37,5 cm
height 4,5 cm

black finish.

Remote

Built-in



Funnel

A gentle presence with a distinctly sculptural form, Funnel is a study in materiality, light and space.

Ceiling Wall

2012

Ø 22 cm



2013

Ø 35 cm



2014

Ø 50 cm



2012




Ø 22 cm

2013



Ø 35 cm

2012



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 36/ _ _ Soft Pink (NCS S 1010-Y50R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

Finish customization

(Available options: Vibia colour palette.

Minimum quantity

10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 631,7 lm

☐ E

CRI >80

/2 _ 3000 K - 649 lm

☐ E

CRI >80

/3 _ 3500 K - 655,4 lm

☐ F

CRI >90

Control

2012 _ _ / _ 0 On/ Off

Finishes

- 51/ _ _ Gold leaf (Gold leaf)

LED Colour Temperature

/1 _ 2700 K - 631,7 lm

☐ E

CRI >80

/2 _ 3000 K - 649 lm

☐ E

CRI >80

/3 _ 3500 K - 655,4 lm

☐ F

CRI >90

Control

2012 51 / _ 0 On/ Off

Materials

Shade: Aluminum.

Reflector: Aluminum.

Support: Steel.

Light Source and electronics

1 x LED PLATE 6,3 W 350 mA

Constant Current 350 mA

100~240V 50/60Hz

Packaging

1 Box 0,27 x 0,27 x 0,16 m

Vol 0,0116 m³

Gross weight 0,892 Kg Net weight 0,45 Kg

LED IP20 CE ENEC Bi-volt

2013

Finishes	LED Colour Temperature	Control
10/ _ _ White (NCS S 0300-N) 36/ _ _ Soft Pink (NCS S 1010-Y50R) 47/ _ _ Green L1 (NCS S 4005-G80Y) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	/1 _ 2700 K - 2580 lm E >80 /2 _ 3000 K - 2580 lm E >90 /3 _ 3500 K - 2580 lm F >90	2013 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
Finishes	LED Colour Temperature	Control
51/ _ _ Gold leaf (Gold leaf)	/1 _ 2700 K - 2580 lm E >80 /2 _ 3000 K - 2580 lm E >90 /3 _ 3500 K - 2580 lm F >90	2013 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi

Materials

Shade: Aluminum.
Reflector: Aluminum.
Support: Steel.

Light Source and electronics

6 x LED 4,5 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,53 Kg Net weight 2 Kg

LED IP20 CE UK ENEC

2014

Finishes	LED Colour Temperature	Control
10/ _ _ White (NCS S 0300-N) 36/ _ _ Soft Pink (NCS S 1010-Y50R) 47/ _ _ Green L1 (NCS S 4005-G80Y) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	/1 _ 2700 K - 2580 lm E >80 /2 _ 3000 K - 2580 lm E >80 /3 _ 3500 K - 2580 lm F >90	2014 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
Materials	LED Colour Temperature	Control
Shade: Aluminum. Reflector: Aluminum. Support: Steel.	/1 _ 2700 K - 2580 lm E >80 /2 _ 3000 K - 2580 lm E >80 /3 _ 3500 K - 2580 lm F >90	2014 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi
Materials	LED Colour Temperature	Control
Shade: Aluminum. Reflector: Aluminum. Support: Steel.	/1 _ 2700 K - 2580 lm E >80 /2 _ 3000 K - 2580 lm E >80 /3 _ 3500 K - 2580 lm F >90	2014 _ _ / _ _ _ _ / _ A Push; 1-10V; DALI-2 _ _ / _ Z Casambi

Materials

Shade: Aluminum.
Reflector: Aluminum.
Support: Steel.

Light Source and electronics

6 x LED 4,5 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 3,782 Kg Net weight 3,3 Kg

LED IP20 CE UK ENEC

Rhythm Horizontal

Design by Arik Levy

Minimalist in form yet simultaneously complex, Rhythm features slender light modules of varying lengths, each fitted with an LED, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, the collection offers total freedom of composition.

Pendant

Stick 47 cm




2110

45 x 47 cm




2111

93 x 47 cm



2112

141 x 47 cm



2113

189 x 47 cm

Stick 87 cm




2120

63 x 87 cm



2121

131 x 87 cm

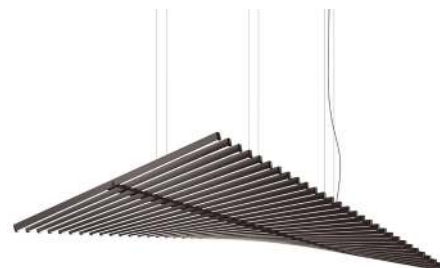

2122

199 x 87 cm



2155

49 x 87 cm

Each project is unique.
Personalise your own
Rhythm composition
quick and easy.

2110

Finishes
 **14/** _ _ Chocolate
 (RAL 8019)
 **58/** _ _ Off-White
 (RAL D2 1109005)

LED Colour Temperature
/1 _ 2700 K - 4332 lm
/3 _ 3500 K - 4578 lm

 CRI >90

Control
2110 _ _ / _ _
 _ _ / _ **1** DALI-2
 _ _ / _ **3** 1-10V
 _ _ / _ **Z** Casambi

Materials
 Stick: PA- Polyamide.
 Diffuser: PC- Polycarbonate.
 Canopy: Steel.

Light Source and electronics
 10 x LED STRIP 30V 2,9 W
 Constant Voltage 30V
 100~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,0591 m³
 Gross weight 7,7 Kg Net weight 6 Kg

Notes
 2110 _ _ / _ 1: DALI-2 **Multi-volt**
 2110 _ _ / _ 3: 1-10V **Multi-volt**


219114 Built-in accessory
 (96 mm) chocolate

219158 Built-in accessory
 (96 mm) off-white

Surface and built-in fitting.
 Extra cable length.

     
 Ø 18,5 cm Only for built-in

2111



Finishes
 ● 14/ _ _ Chocolate
 (RAL 8019)
 ● 58/ _ _ Off-White
 (RAL D2 1109005)

LED Colour Temperature
 /1 _ 2700 K - 8664 lm
 /3 _ 3500 K - 9157 lm
 D >
 CRI >90

Control

2111 _ _ / _ _

_ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
 Diffuser: Polycarbonate.
 Canopy: Steel.

Light Source and electronics

20 x LED STRIP 30V 2,9 W
 Constant Voltage 30V
 100~240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,1570 m³
 Gross weight 14,2 Kg Net weight 10,5 Kg

Notes

2111 _ _ / _ 1: DALI-2 **Multi-volt**
 2111 _ _ / _ 3: 1-10V **Multi-volt**

219114 Built-in accessory
 (96 mm) chocolate


219158 Built-in accessory
 (96 mm) off-white

Surface and built-in fitting.

Extra cable length.

LED IP20 CE UK ENEC
 Ø 18,5 cm Only for built-in

2112



Finishes
 ● 14/ _ _ Chocolate
 (RAL 8019)
 ● 58/ _ _ Off-White
 (RAL D2 1109005)

LED Colour Temperature
 /1 _ 2700 K - 12996 lm
 /3 _ 3500 K - 13736 lm
 D >
 CRI >90

Control

2112 _ _ / _ _

_ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
 Diffuser: Polycarbonate.
 Canopy: Steel.

Light Source and electronics

30 x LED STRIP 30V 2,9 W
 Constant Voltage 30V
 100~240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,0430 m³
 Gross weight 10,3 Kg Net weight 7 Kg

Notes

2112 _ _ / _ 1: DALI-2 **Multi-volt**
 2112 _ _ / _ 3: 1-10V **Multi-volt**

219014 Built-in accessory
 (44,5 mm) chocolate


219058 Built-in accessory
 (44,5 mm) off-white

Surface and built-in fitting.

Extra cable length.

LED IP20 CE UK ENEC
 Ø 18,5 cm Only for built-in

2113



Finishes
 ● 14/ _ _ Chocolate
 (RAL 8019)
 ● 58/ _ _ Off-White
 (RAL D2 1109005)

LED Colour Temperature
 /1 _ 2700 K - 17328 lm
 /3 _ 3500 K - 18314 lm
 D >
 CRI >90

Control

2113 _ _ / _ _

_ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
 Diffuser: Polycarbonate.
 Canopy: Steel.

Light Source and electronics

40 x LED STRIP 30V 2,9 W
 Constant Voltage 30V
 100~240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,1900 m³
 Gross weight 17,2 Kg Net weight 13,5 Kg

Notes

2113 _ _ / _ 1: DALI-2 **Multi-volt**
 2113 _ _ / _ 3: 1-10V **Multi-volt**

219014 Built-in accessory
 (44,5 mm) chocolate


219058 Built-in accessory
 (44,5 mm) off-white

Surface and built-in fitting.

Extra cable length.

LED IP20 CE UK ENEC
 Ø 18,5 cm Only for built-in

2120



- Finishes**
- 14/ _ _ Chocolate (RAL 8019)
 - 58/ _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 7602 lm
/3 _ 3500 K - 8035 lm

Control

2120 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics

10 x LED STRIP 30V 5,8 W
Constant Voltage 30V
100-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1380 m³
Gross weight 9,5 Kg Net weight 7,3 Kg

Notes

2120 _ _ / _ 1: DALI-2 **Multi-volt**
2120 _ _ / _ 3: 1-10V **Multi-volt**

219214 Built-in accessory
(136 mm) chocolate


219258 Built-in accessory
(136 mm) off-white

Surface and built-in fitting.

Extra cable length.

LED IP20 CE UK ENE Ø 18,5 cm Only for built-in

2121



- Finishes**
- 14/ _ _ Chocolate (RAL 8019)
 - 58/ _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 15204 lm
/3 _ 3500 K - 16070 lm

Control

2121 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

20 x LED STRIP 30V 5,8 W
Constant Voltage 30V
100-240V 50/60Hz

Notes

2 Boxes
Total Vol 0,1664 m³
Gross weight 14,7 Kg Net weight 10,5 Kg

Notes

2121 _ _ / _ 1: DALI-2 **Multi-volt**
2121 _ _ / _ 3: 1-10V **Multi-volt**

219014 Built-in accessory
(44,5 mm) chocolate


219058 Built-in accessory
(44,5 mm) off-white

Surface and built-in fitting.

Extra cable length.

LED IP20 CE UK ENE Ø 18,5 cm Only for built-in

2122



- Finishes**
- 14/ _ _ Chocolate (RAL 8019)
 - 58/ _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 22807 lm
/3 _ 3500 K - 24105 lm

Control

2122 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

30 x LED STRIP 30V 5,8 W
Constant Voltage 30V
100-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,07120 m³
Gross weight 24 Kg Net weight 21,5 Kg

Notes

2122 _ _ / _ 1: DALI-2 **Multi-volt**
2122 _ _ / _ 3: 1-10V **Multi-volt**

219014 Built-in accessory
(44,5 mm) chocolate


219058 Built-in accessory
(44,5 mm) off-white

Surface and built-in fitting.

Extra cable length.

LED IP20 CE UK ENE Ø 18,5 cm Only for built-in

2155
Wood



- Finishes
- 82/ _ _ White oak
 - 83/ _ _ American walnut

LED Colour Temperature

- /1 _ 2700 K - 5893 lm
- /3 _ 3500 K - 6213 lm

 CRI >90

Control

2155 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ 3 1-10V
- _ _ / _ Z Casambi

Materials

Stick: Wood. Spacers: Aluminum.
Diffuser: PC-Polycarbonate.
Canopy: Steel.

Light Source and electronics

8 x LED STRIP 5,8 W 30V
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Cajas
Total Vol 0,1570 m³
Peso bruto 8,5 Kg Peso neto 6,3 Kg

Notes

2155 _ _ / _ 1: DALI-2 

2155 _ _ / _ 3: 1-10V 

219282 Built-in accessory
(136 mm) Beige D1

219283 Built-in accessory
(136 mm) Brown D1

Surface and built-in fitting.
Extra cable length.

 Ø 18,5 cm Only for built-in




Rhythm Vertical

Design by Arik Levy

Minimalist in form yet simultaneously complex, Rhythm features slender light modules of varying lengths, each fitted with an LED, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, the collection offers total freedom of composition.

Pendant


Stick 47 cm

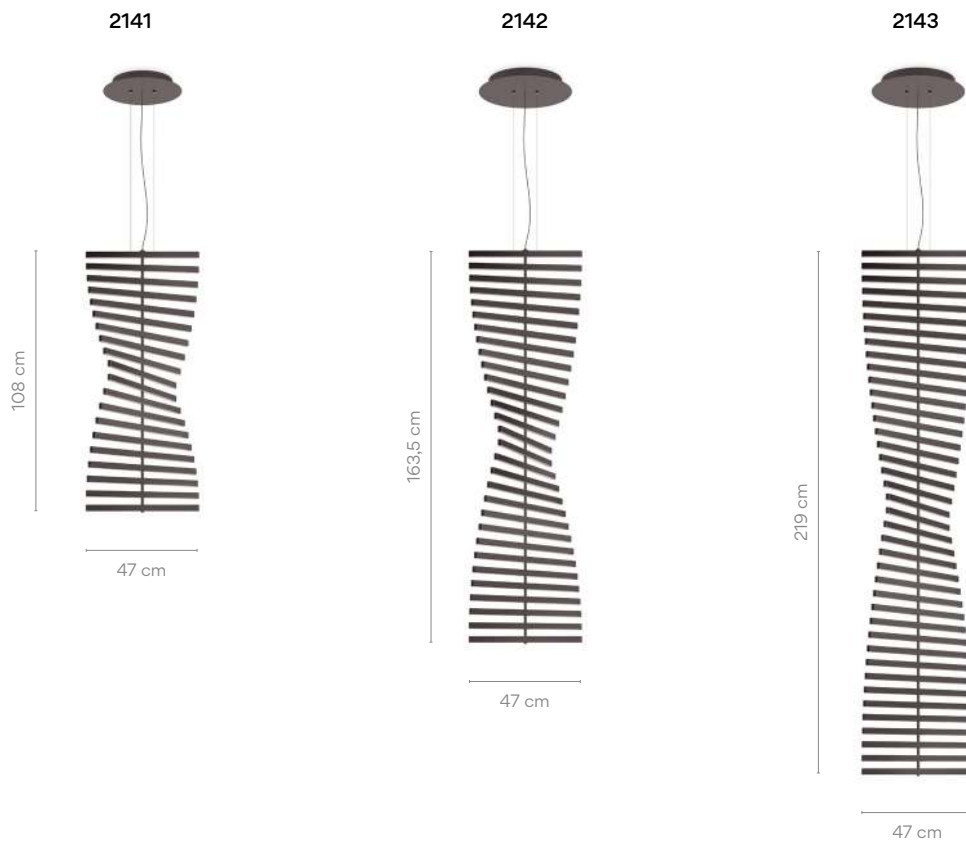


Stick 87 cm



Each project is unique.
Personalise your own
Rhythm composition
quick and easy.

2141		Finishes 14/ _ _ Chocolate (RAL 8019) 58/ _ _ Off-White (RAL D2 1109005)	LED Colour Temperature /1 _ 2700 K - 8664 lm /3 _ 3500 K - 9157 lm  CRI >90	Control 2141 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
		Materials Stick: Polyamide 6 with 10% of Fiberglass. Diffuser: Polycarbonate. Canopy: Steel. Light Source and electronics 20 x LED STRIP 30V 2,9 W Constant Voltage 30V 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,5850 m³ Gross weight 10,3 Kg Net weight 7,4 Kg Notes 2141 _ _ / _ 1: DALI-2 Multi-volt 2141 _ _ / _ 3: 1-10V Multi-volt 14 Built-in accessory (96 mm) chocolate 58 Built-in accessory (96 mm) off-white Surface and built-in fitting. Extra cable length. LED  IP20 CE UK ER EE UK  Ø 18,5 cm Only for built-in	

2142		Finishes 14/ _ _ Chocolate (RAL 8019) 58/ _ _ Off-White (RAL D2 1109005)	LED Colour Temperature /1 _ 2700 K - 12996 lm /3 _ 3500 K - 13736 lm  CRI >90	Control 2142 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
		Materials Stick: Polyamide 6 with 10% of Fiberglass. Diffuser: Polycarbonate. Canopy: Steel. Light Source and electronics 30 x LED STRIP 30V 2,9 W Constant Voltage 30V 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,6239 m³ Gross weight 13,7 Kg Net weight 8,2 Kg Notes 2142 _ _ / _ 1: DALI-2 Multi-volt 2142 _ _ / _ 3: 1-10V Multi-volt 219114 Built-in accessory (96 mm) chocolate 219158 Built-in accessory (96 mm) off-white Surface and built-in fitting. Extra cable length. LED  IP20 CE UK ER EE UK  Ø 18,5 cm Only for built-in	

2143



- Finishes**
- 14/ _ _ Chocolate (RAL 8019)
 - 58/ _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 8664 lm
/3 _ 3500 K - 9157 lm

CRI >90

Control

2143 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

40 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Notes

2 Boxes
Total Vol 0,6600 m³
Gross weight 16,9 Kg Net weight 13 Kg

Notes

2143 _ _ / _ 1: DALI-2 **Multi-volt**
2143 _ _ / _ 3: 1-10V **Multi-volt**


14 Built-in accessory
(96 mm) chocolate

58 Built-in accessory
(96 mm) off-white

Surface and built-in fitting.
Extra cable length.

LED **IP20** **CE** **UK** **ERC** **Ø**
Ø 18,5 cm Only for built-in

2165
Madera



- Finishes**
- 82/ _ _ White oak
 - 83/ _ _ American walnut

LED Colour Temperature

/1 _ 2700 K - 5893 lm
/3 _ 3500 K - 6213 lm

CRI >90

Control

2165 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Materials

Stick: Wood. Spacers: Aluminum.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

8 x LED STRIP 5,8W 30V
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1570 m³
Gross weight 8,5 Kg Net weight 6,3 Kg

Notes

2165 _ _ / _ 1: DALI-2 **Multi-volt**
2165 _ _ / _ 3: 1-10V **Multi-volt**


219282 Built-in accessory
(136 mm) Beige D1

219283 Built-in accessory
(136 mm) Brown D1

Surface and built-in fitting.
Extra cable length.

LED **IP20** **CE** **UK** **ERC** **Ø**
Ø 18,5 cm Only for built-in

2167
Madera



- Finishes**
- 82/ _ _ White oak
 - 83/ _ _ American walnut

LED Colour Temperature

/1 _ 2700 K - 11049 lm
/3 _ 3500 K - 11649 lm

CRI >90

Control

2167 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Materials

Stick: Wood. Spacers: Aluminum.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

15 x LED STRIP 5,8W 30V
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1570 m³
Gross weight 12,6 Kg Net weight 6,6 Kg

Notes

2167 _ _ / _ 1: DALI-2 **Multi-volt**
2167 _ _ / _ 3: 1-10V **Multi-volt**

219282 Built-in accessory
(136 mm) Beige D1

219283 Built-in accessory
(136 mm) Brown D1

Surface and built-in fitting.
Extra cable length.

LED **IP20** **CE** **UK** **ERC** **Ø**
Ø 18,5 cm Only for built-in

Guise

Design by Diez Office


Crafted of precision glass and embedded with a row of recessed LEDS, Guise explores the relationship between light and transparency. The light inside the glass appears invisible while the delicately engraved surface radiates an intense glow, the markings beautifully diffusing the light.

Wall



2260	Finishes	LED Colour Temperature	Control
	● 18/ _ _ Graphite (ADAPTA RF9913WX)	/2 _ 3000 K - 445 lm	2260 18 / 26 Sensor
		G	
		CRI >90	
	Materials		Packaging
	Diffuser: Borosilicate. LED support: Aluminum.		1 Box 0,69 x 0,69 x 0,09 m Vol 0,043 m³
	Light Source and electronics		Gross weight 7 Kg Net weight 4 Kg
	1 x LED STRIP 24V 10 W Constant Voltage 24V 100~240V 50/60Hz		Notes
			Electric cable with plug 3 m
			LED IP20 CE UK ENE
			Dimmer Multi-volt

2262



Finishes
 ● 18/ _ _ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature
 /2_ 3000 K - 897 lm
 G
 CRI >90

Control
 2262 18 / 26 Sensor

Materials
 Diffuser: Borosilicate.
 LED support: Aluminum.


Light Source and electronics
 1 x LED STRIP 24V 17,2 W.
 Constant Voltage 24V
 100~240V 50/60Hz

Packaging
 1 Box 1,04 x 1,04 x 0,10 m
 Vol 0,104 m³
 Gross weight 16,5 Kg Net weight 11,58 Kg

Notes
 Electric cable with plug 3 m

LED IP20 CE UK ENEC
 Dimmer Multi-volt

2263



Finishes
 ● 18/ _ _ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature
 /A Infinite Colour (TW + RGB)
 778 lm - 939 lm
 G
 CRI >90

Control
 2263 18 / AY_30
 Protopixel* (Remote)
 (also with push buttons)


Materials
 Diffuser: Borosilicate. LED support: Aluminum.

Light Source and electronics
 1 x LED STRIP 24V 17,2 W.
 Constant Voltage 24V
 100~240V 50/60Hz


Packaging
 1 Box 1,04 x 1,04 x 0,10 m
 Vol 0,104 m³
 Gross weight 16,5 Kg Net weight 11,58 Kg


Notes
 ProtoPixel products are compatible with
 all other DALI-2 products via a designated
 gateway (please consult us).

LED IP20 CE UK ENEC Dimmer

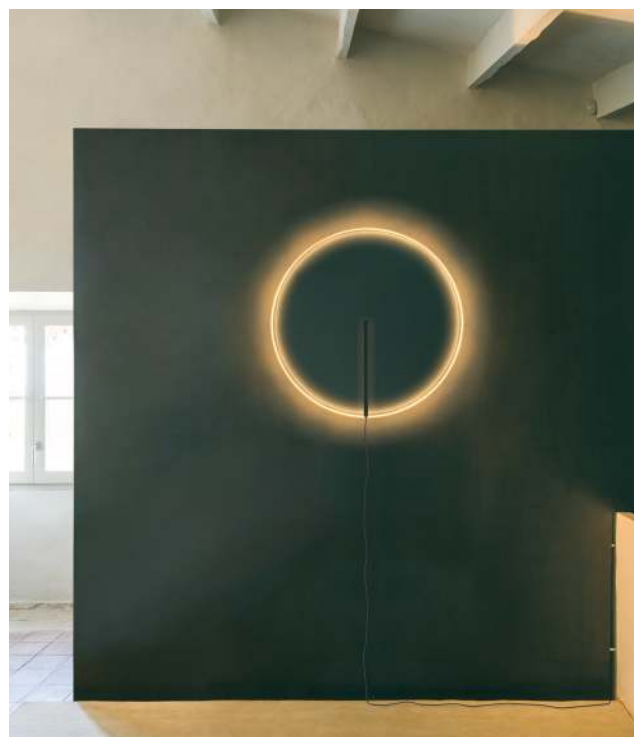


Pendant

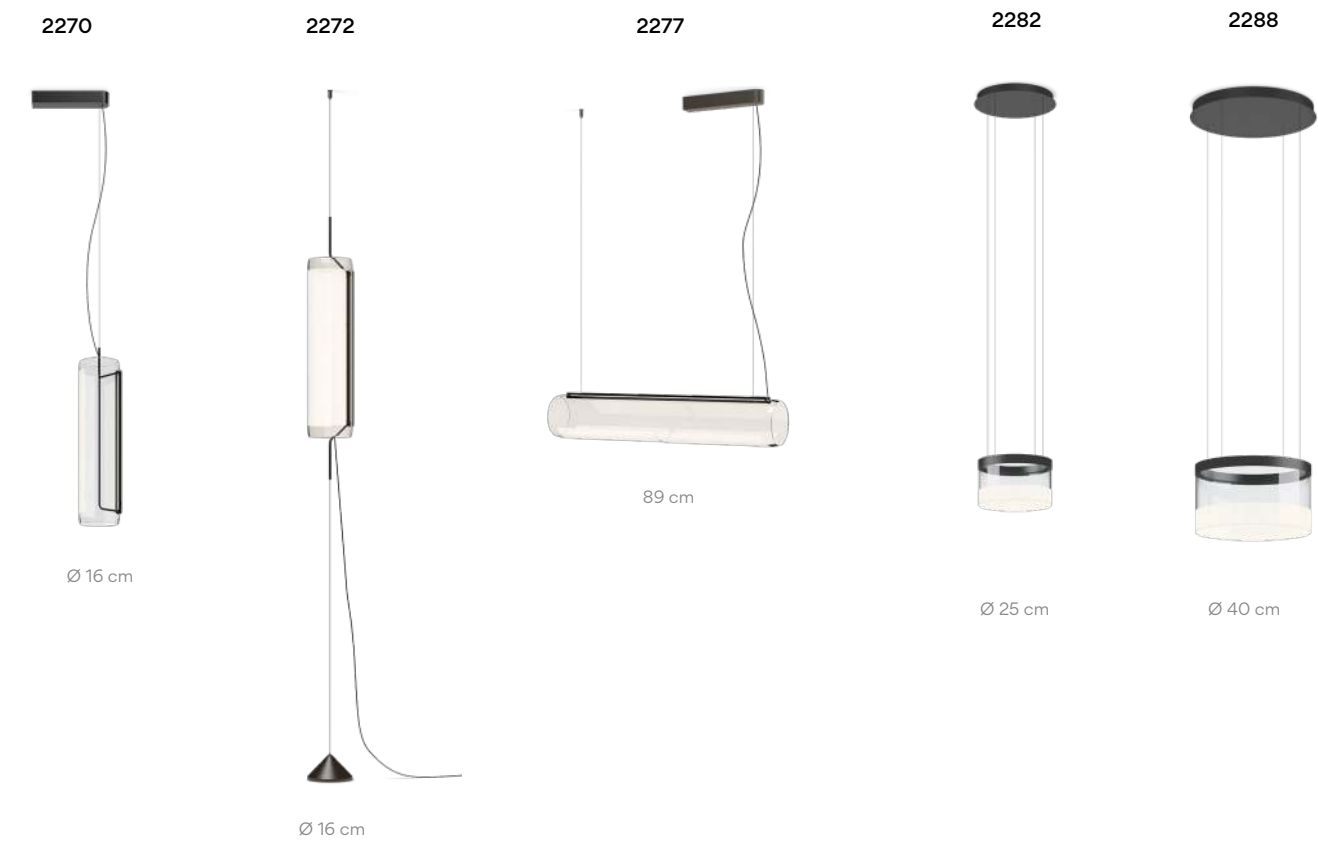

2270 	Finishes ● 18/ __ Graphite (ADAPTA RF9913WX) Materials Diffuser: Borosilicate glass. Body: Aluminum. LED support: Aluminum. Canopy: Steel. Light Source and electronics 1 x LED STRIP 24V 20 W Constant Voltage 24V 110~240V 50/60Hz	LED Colour Temperature /2 _ 3000 K - 1097 lm G → CRI >90 Packaging 1 Box 0,87 x 0,35 x 0,37 m Vol 0,113 m³ Gross weight 6,5 Kg Net weight 5 Kg Notes 2270 __ / 21: DALI-2 Multi-volt 2270 __ / 26: Sensor Bi-volt Extra cable length.	Control 2270 __ / __ __ / 21 DALI-2 __ / 26 Sensor __ / 22 Casambi LED IP20 CE UK ERL Dimmer
--	--	--	--

2272



Finishes

18/ _ _ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature

/2 _ 3000 K - 1097 lm



CRI >90

Control

2272 _ _ / 26 Sensor

Materials

Diffuser: Borosilicate glass. Body: Aluminum.
 LED support: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 20 W
 Constant Voltage 24V
 110~240V 50/60Hz


Packaging

1 Box 0,45 x 0,80 x 0,20 m
 Vol 0,0072 m³
 Gross weight 16,10 Kg Net weight 16,10 Kg


Notes

2272 _ _ / 26: Sensor **Bi-volt**

Extra cable length.



2277



Finishes

18/ _ _ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature

/2 _ 3000 K - 1404 lm



CRI >90

Control

2277 _ _ / _ _

_ _ / 21 DALI-2

_ _ / 26 Sensor

_ _ / 2Z Casambi

Materials

Diffuser: Borosilicate glass. Body: Aluminum.
 LED support: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 30 W
 Constant Voltage 24V
 100~240V 50/60Hz

Packaging


1 Box 1,18 x 0,35 x 0,37 m
 Vol 0,153 m³
 Gross weight 9,5 Kg Net weight 7,5 Kg

Notes


2277 _ _ / 21: DALI-2 **Multi-volt**

2277 _ _ / 26: Sensor **Bi-volt**

Extra cable length.



2282



Finishes

18/ _ _ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature

/2 _ 3000 K - 398 lm



CRI >90

Control

2282 _ _ / _ _

_ _ / 21 DALI-2

_ _ / 26 Sensor

_ _ / 2B Push; 1-10V

_ _ / 2Z Casambi

Materials

Diffuser: Borosilicate glass. Body: Aluminum.
 LED support: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 12 W
 Constant Voltage 24V
 110~240V 50/60Hz

Packaging

1 Box 0,41 x 0,41 x 0,38 m
 Vol 0,0639 m³
 Gross weight 3,3 Kg Net weight 2,3 Kg


Notes

2282 _ _ / 21: DALI-2 **Bi-volt**


2282 _ _ / 26: Sensor **Bi-volt**

2282 _ _ / 2B: Push; 1-10V **Bi-volt**

Extra cable length.



2288



Finishes

18/ _ _ Graphite
 (ADAPTA RF9913WX)

LED Colour Temperature

/2 _ 3000 K - 868 lm



CRI >90

Control

2288 _ _ / _ _

_ _ / 21 DALI-2

_ _ / 26 Sensor

_ _ / 2B Push; 1-10V

_ _ / 2Z Casambi

Materials

Diffuser: Borosilicate glass. Body: Aluminum.
 LED support: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 18 W
 Constant Voltage 24V
 110~240V 50/60Hz


Packaging

1 Box 0,56 x 0,56 x 0,46 m
 Vol 0,1443 m³
 Gross weight 11,7 Kg Net weight 9,7 Kg

Notes

2288 _ _ / 21: DALI-2 **Multi-volt**

Extra cable length.



Ceiling

2292



Ø 25 cm




2298

Ø 40 cm



2292		Finishes ● 18/ __ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /2 _ 3000 K - 398 lm  CRI >90	Control 2292 __ / __ __ / 21 DALI-2 __ / 2B Push; 1-10V __ / 2Z Casambi
	Materials Diffuser: Borosilicate glass. Body: Aluminum. LED support: Aluminum. Canopy: Steel. Light Source and electronics 1 x LED STRIP 24V 12 W Constant Voltage 24V 110~240V 50/60Hz	Packaging 1 Box 0,41 x 0,41 x 0,33 m Vol 0,0555 m³ Gross weight 3,2 Kg Net weight 2,2 Kg Notes 2292 __ / 21: DALI-2  2292 __ / 2B: Push; 1-10V       		
2298		Finishes ● 18/ __ Graphite (ADAPTA RF9913WX)	LED Colour Temperature /2 _ 3000 K - 398 lm  CRI >90	Control 2298 __ / __ __ / 21 DALI-2 __ / 2B Push; 1-10V __ / 2Z Casambi
	Materials Diffuser: Borosilicate glass. Body: Aluminum. LED support: Aluminum. Canopy: Steel. Light Source and electronics 1 x LED STRIP 24V 18 W Constant Voltage 24V 220~240V 50/60Hz	Packaging 1 Box 0,56 x 0,56 x 0,46 m Vol 0,1443 m³ Gross weight 13,3 Kg Net weight 11,3 Kg Notes 2298 __ / 21: DALI-2       		

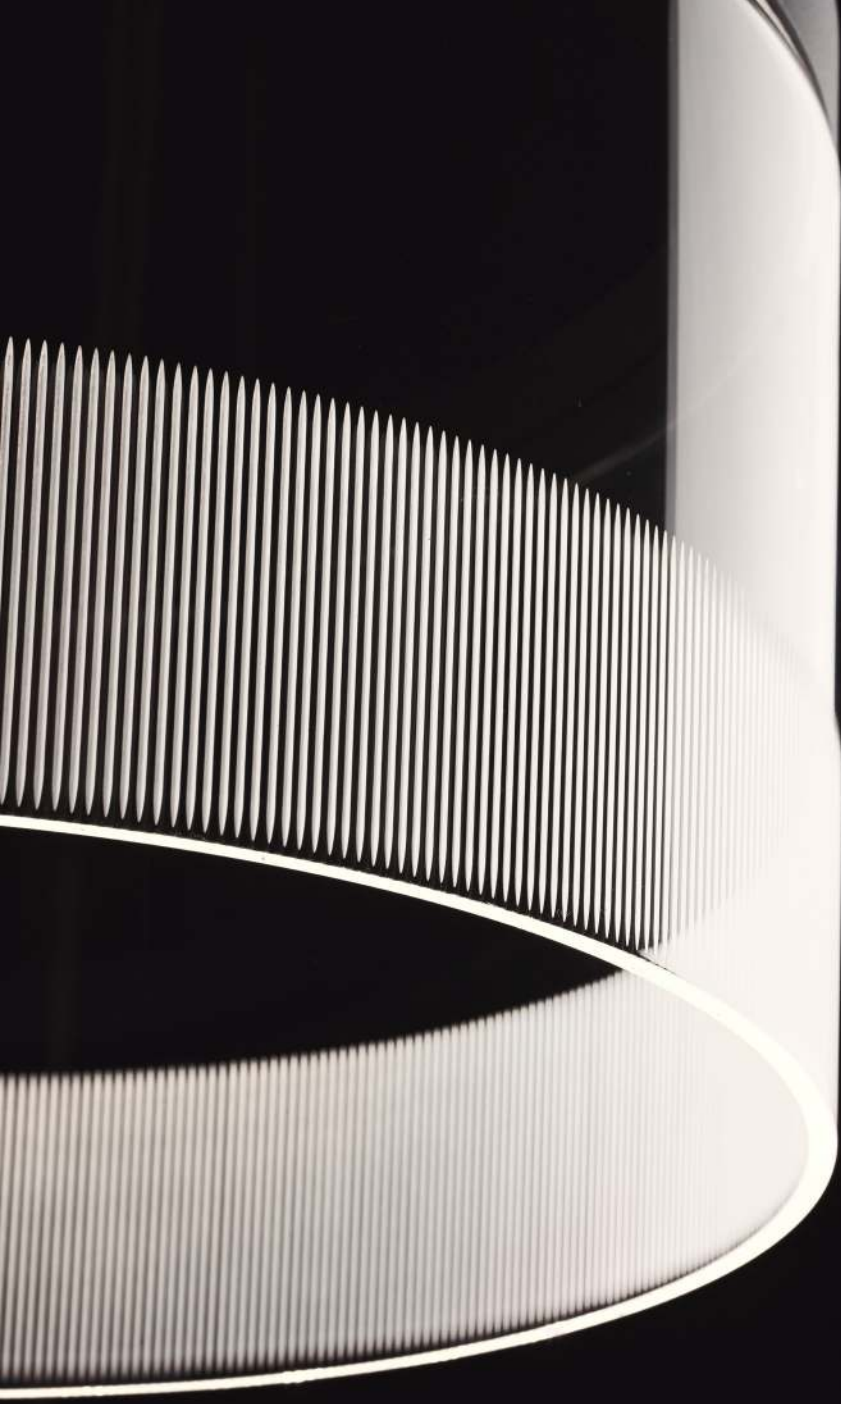

Halo


Design by Martín Azúa

A seamless merging of light and matter, Halo lends the effect of light floating in the air. Powered by LED bulbs that remain invisible within their opalized, spherical moulds, the light flows freely from its source.


Pendant



2330
Ø 55,5 cm

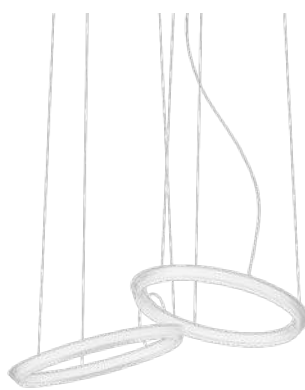

2331
89 cm
2 Units

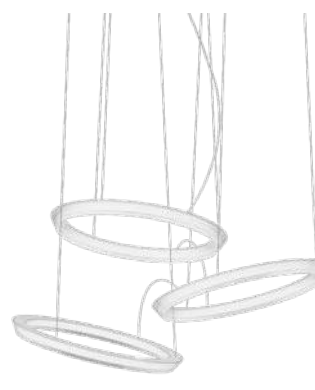


2332
127 cm
3 Units



2333
197 cm
5 Units

Each project is unique.
Personalise your own
Halo composition
quick and easy.

2330



Finishes
03/ __ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
CRI >90
/2 _ 3000 K - 1726 lm
CRI >80
D

Control

2330 __ / __
__ / 1 DALI-2
__ / 3 1-10V
__ / Z Casambi

Materials

LED support: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz


Packaging

1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0972 m³
Gross weight 5,75 Kg Net weight 3,75 Kg

Notes

2330 __ / 1: DALI-2 **Multi-volt**
2330 __ / 3: 1-10V **Multi-volt**
Extra cable length.

LED IP20 CE UK ENE

2331 	Finishes 03/ _ _ White (RAL 9016)
--	---

LED Colour Temperature


/1 _ 2700 K - 3808 lm
CRI >90

/2 _ 3000 K - 3453 lm
CRI >80


D




Pendant




2340
152 cm
2 Units

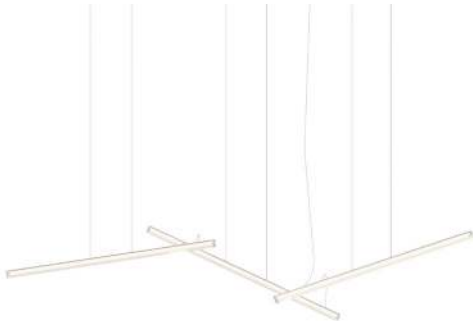

2341
204 cm
3 Units

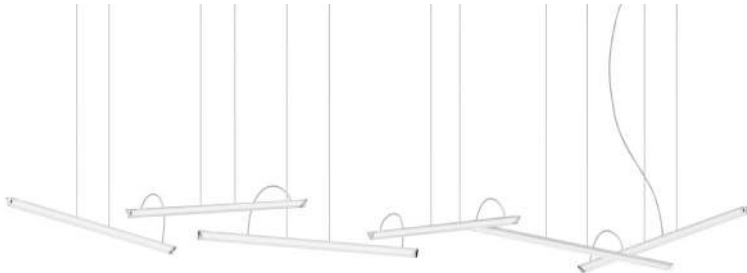

2342
336 cm
6 Units

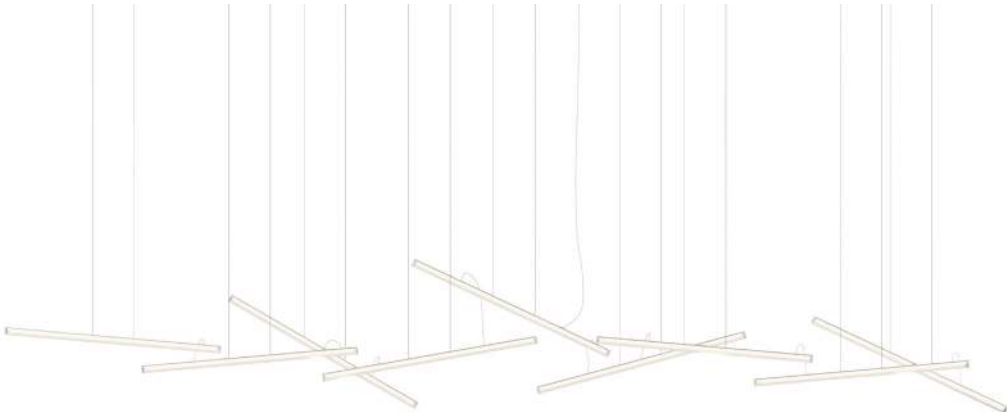

2343
500 cm
9 Units

Each project is unique.
Personalise your own
Halo composition
quick and easy.

2340

Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1_ 2700 K - 1904 lm
F
/2_ 3000 K - 1726 lm
G
CRI >90

Control

2340 _ _ / _ _


_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi



Select Electrical connection



Surface



Remote
Micro



Remote
XXS

Materials

Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

2 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0753 m³
Gross weight 6,2 Kg Net weight 5,58 Kg


Notes


2340 _ _ / _ 1: DALI-2 **Multi-volt**

2340 _ _ / _ 3: 1-10V **Multi-volt**

Extra cable length.

LED IP20 CE ENEC EAC

2341		Finishes 03/ _ _ White (RAL 9016)	LED Colour Temperature /1 _ 2700 K - 4246 lm F /2 _ 3000 K - 3850 lm G CRI >90	Control 2341 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
		 Select Eletrical connection  Surface  Remote Micro  Remote XXS		
		Materials Diffuser: PMMA. Canopy: Steel. Light Source and electronics 3 x LED STRIP 24V 15,3 W Constant Voltage 24V 100~277V 50/60Hz		Packaging 2 Boxes Total Vol 0,0753 m³ Gross weight 7,3 Kg Net weight 6,57 Kg Notes 2341 _ _ / _ 1: DALI-2 Multi-volt 2341 _ _ / _ 3: 1-10V Multi-volt Extra cable length. LED  IP20   ERC 

2342		Finishes 03/ _ _ White (RAL 9016)	LED Colour Temperature /1 _ 2700 K - 8492 lm F /2 _ 3000 K - 7701 lm G CRI >90	Control 2342 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
		 Select Eletrical connection  Surface  Remote Micro  Remote XXS		
		Materials Diffuser: PMMA. Canopy: Steel. Light Source and electronics 6 x LED STRIP 24V 15,3 W Constant Voltage 24V 100~277V 50/60Hz		Packaging 2 Boxes Total Vol 0,0756 m³ Gross weight 11,8 Kg Net weight 10,25 Kg Notes 2342 _ _ / _ 1: DALI-2 Multi-volt 2342 _ _ / _ 3: 1-10V Multi-volt Extra cable length. LED  IP20   ERC 

2343

Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 12739 lm
F
/2 _ 3000 K - 11552 lm
G
CRI >90


Control

2343 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi



Select Electrical connection



Surface

Remote
Micro

Remote
XXS

Materials

Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

9 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0756 m³
Gross weight 16,20 Kg Net weight 14,75 Kg


Notes

2343 _ _ / _ 1: DALI-2 Multi-volt

2343 _ _ / _ 3: 1-10V Multi-volt

Extra cable length.

LED IP20 CE UK ENE

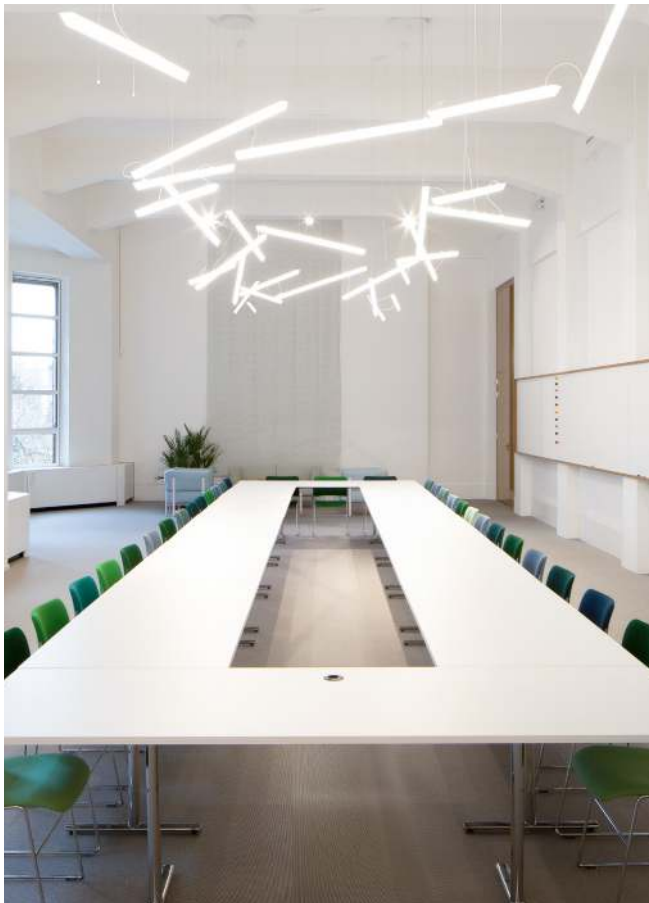

Select Eletrical connection

Choose your preferred installation option according to your needs.

For Ref. 2340, 2341

Drop ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.



Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Match with
fixture finish.

Regular ceiling



Ø 30,5 cm

match with
fixture finish.

For Ref. 2342, 2343

Drop ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.



Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Match with
fixture finish.

Regular ceiling



Ø 35 cm

match with
fixture finish.

Remote

Built-in

Wall



2360

102,5 x 5,7 cm

2360

Finishes

- **11/ _ _ Black**
(NCS S 8500-N)
- **13/ _ _ Off-White**
(NCS S 1000-N)

LED Colour Temperature

- /1 _ 2700 K - 1415 lm
 - /2 _ 3000 K - 1224 lm
- F** 
- CRI >90

Control

- 2360 _ _ / _ _**
- _ _ / _ 1 DALI-2
 - _ _ / _ 3 1-10V
 - _ _ / _ Z 30
- Casambi (Remote)

Materials

Diffuser: PMMA.
LED support: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 15,3 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,10 x 1,025 x 0,10 m
Vol 0,01 m³
Gross weight 2,25 Kg Net weight 1,75 Kg

Notes

2360 _ _ / _ 3: 1-10V **Multi-volt**

LED  **IP20** **CE** **UK** **ERC** 



Halo Jewel

Design by Martín Azúa

Subtle light floating in the air and delicately suspended by a perfectly crafted steel structure. Light and matter in one.

Pendant

INDIVIDUAL MODELS

2350

Ø 56,3 cm



2351

Ø 56,3 cm



2355

Ø 16 x 350 cm



2356

Ø 27 x 350 cm



2350

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
G
CRI >90
/2 _ 3000 K - 2024 lm
F
CRI >80


Control
2350 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Finishes
● 20/ _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
G
CRI >90

Control
2350 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

⚡ Select Electrical connection

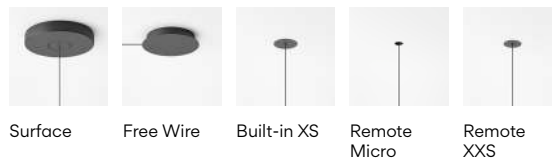

Materials

Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,6 x 0,6 x 0,27 m
Vol 0,097 m³
Gross weight 7 Kg Net weight 6,35 Kg

Notes

2350 _ _ / _ 1: DALI-2 **Multi-volt**

2350 _ _ / _ 3: 1-10V **Multi-volt**

Extra cable length.

LED IP20 CE UK ENE

2351

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
G
CRI >90
/2 _ 3000 K - 2024 lm
F
CRI >80


Control
2351 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Finishes
● 20/ _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
G
CRI >90

Control
2351 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

⚡ Select Electrical connection

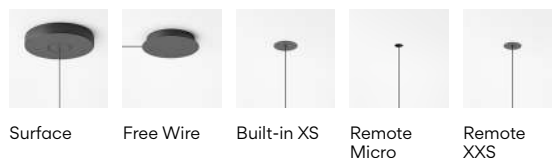

Materials

Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,6 x 0,6 x 0,27 m
Vol 0,097 m³
Gross weight 7 Kg Net weight 6,35 Kg

Notes

2351 _ _ / _ 1: DALI-2 **Multi-volt**

2351 _ _ / _ 3: 1-10V **Multi-volt**

Extra cable length.

LED IP20 CE UK ENE

2355

Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1415 lm
/2 _ 3000 K - 1224 lm
F
CRI >90

Control

2355 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Finishes
● **20/** _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K - 1415 lm
/2 _ 3000 K - 1224 lm
F
CRI >90

Control

2355 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

⚡ Select Electrical connection




Surface



Free Wire



Built-in XS

Remote
MicroRemote
XXS

Materials

Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 15,3 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,13 x 0,19 x 1,265 m
Vol 0,0312 m³
Gross weight 5 Kg Net weight 4,1 Kg

Notes

Extra cable length.

LED ☐ IP20 ☐ CE ☐ UK ☐ ENEC ☐ Dimmer ☐

2356

Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4246 lm
/2 _ 3000 K - 3672 lm
F
CRI >90

Control

2356 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Finishes
● **20/** _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K - 4246 lm
/2 _ 3000 K - 3672 lm
F
CRI >90

Control

2356 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Materials

Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics

3 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,31 x 0,33 x 2 m
Vol 0,2046 m³
Gross weight 7,4 Kg Net weight 6,06 Kg

Notes

2356 _ _ / _ 1: DALI-2 ☐ Multi-volt2356 _ _ / _ 3: 1-10V ☐ Multi-volt

Extra cable length.

LED ☐ IP20 ☐ CE ☐ UK ☐ ENEC ☐ Dimmer ☐



Select your model at vibia.com and adjust



2 x 2355



2 x 2350



1 x 2351 2 x 2350



3 x 2351



3 x 2351



4 x 2350



5 x 2355



1 x 2351 3 x 2350



9 x 2355



17 x 2355



7 x 2355



25 x 2355

See more
multiple models
at vibia.com

Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K	Model _ _ / _ _
● 20/ _ _ Gold (Gold)	/2 _ 3000 K	
	CRI >80	_ _ / _ 1 DALI-2
	CRI >90	_ _ / _ 3 1-10V
		_ _ / _ Z Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 2350, 2351

Drop ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.


Ø 6 cm
height 6 cm

for all types
of drop ceilings.
Black finish.

Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

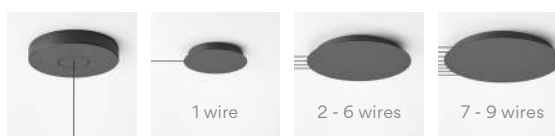

Ø 27 cm

match with
fixture finish.

Ø 22 cm

you can choose the finish of the
canopy among black or white.

Ø 36 cm

Ø 40 cm

For Ref. 2355

Drop ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.


Ø 6 cm
height 6 cm

for all types
of drop ceilings.
Black finish.

Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

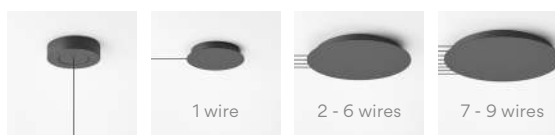

Ø 16 cm

match with
fixture finish.

Ø 20 cm

you can choose the finish of the
canopy among black or white.

Ø 36 cm

Ø 40 cm

Remote

Built-in

Materials

Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Notes

Extra cable length.

LED IP20 CE UK ENE Dimmer Bi-volt

Cosmos

Design by Lievore, Altherr, Molina

Design and light become one with Cosmos pendant. Flattened spheres in suspension that naturally descend from the ceiling and use light to draw a fluctuating course like a constellation of stars.

Pendant



Ø 19 cm

2500



Ø 27 cm

2501



Ø 48 cm

2502



55 cm

2510



65 cm

2511



76 cm

2515



86 cm

2516

2500

Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **62/** _ _ Green (PANTONE 5645)
- **58/** _ _ Off-White (NCS S 2005-Y20R)

LED Colour Temperature

- /1** _ 2700 K - 485 lm CRI >90
- /3** _ 3500 K - 128 lm CRI >80



Control

2500 _ _ / _ _

- _ _ / _ **0** On/ Off
- _ _ / _ **1** DALI-2
- _ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

1 x LED 4,5 W 350mA
Constant Current 350 mA
/ **10**: 100~240V 50/60Hz
/ **1B**: 110~240V 50/60Hz


Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0180 m³
Gross weight 1,62 Kg Net weight 1,18 Kg

Notes

2500 _ _ / _ **0**: On/ Off **Bi-volt**
2500 _ _ / _ **1**: DALI-2 **Bi-volt**

Extra cable length.



2501

Finishes
 **14/** __ Chocolate
(RAL 8019)
 **62/** __ Green
(PANTONE 5645)
 **58/** __ Off-White
(NCS S 2005-Y20R)

LED Colour Temperature
/1 _ 2700 K - 485 lm
CRI >90
/3 _ 3500 K - 512 lm
CRI >80


Control

2501 __ / __
__ / _ **0** On/ Off
__ / _ **1** DALI-2
__ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel

Light Source and electronics

1 x LED 4,5 W 350mA
Constant Current 350 mA
/ **10**: 100~240V 50/60Hz
/ **1B**: 110~240V 50/60Hz

Packaging

1 Box 0,42 x 0,42 x 0,25 m
Vol 0,0441 m³
Gross weight 2,54 Kg Net weight 1,44 Kg

Notes

2501 __ / _ **0**: On/ Off 
2501 __ / _ **1**: DALI-2 
Extra cable length.

2502

Finishes
 **10/** __ White
(NCS S 0300-N)

LED Colour Temperature
/1 _ 2700 K - 485 lm
CRI >90
/3 _ 3500 K - 512 lm
CRI >80


Control

2502 __ / __
__ / _ **0** On/ Off
__ / _ **1** DALI-2
__ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA.
1 x LED 1 W 350 mA.
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m³
Gross weight 5,58 Kg Net weight 3,15 Kg

Notes

2502 __ / _ **0**: On/ Off 
2502 __ / _ **1**: DALI-2 
Extra cable length.

2510

Finishes
 **62/** __ Green,
White and
Chocolate
(PANTONE 5645,
NCS S 0300-N,
RAL 8019)

LED Colour Temperature
/1 _ 2700 K - 1455 lm
CRI >90
/3 _ 3500 K - 1537 lm
CRI >80


Control

2510 __ / __
__ / _ **A** Push;
1-10V; DALI-2
__ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

3 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m³
Gross weight 7,54 Kg Net weight 5,11 Kg

Notes

2510 __ / _ **A**: Push; 1-10V; DALI-2 
Compositions and finishes can
not be changed
Extra cable length.

2511	Finishes 62/ __ Green, White and Chocolate (PANTONE 5645, NCS S 0300-N, RAL 8019) 58/ __ Off-White, White and Chocolate (NCS S 2005-Y20R, NCS S 0300-N, RAL 801)	LED Colour Temperature /1 _ 2700 K - 1455 lm CRI >90 /3 _ 3500 K - 1537 lm CRI >80 	Control 2511 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Diffuser: PC- Polycarbonate. Body: PU- Polyurethane. Canopy: Steel. Light Source and electronics 3 x LED 4,5 W 350 mA 1 x LED 1 W 350 mA. Constant Current 350 mA 110-240V 50/60Hz	Packaging 1 Box 0,60 x 0,60 x 0,27 m Vol 0,0970 m³ Gross weight 9,25 Kg Net weight 6,82 Kg Notes 2511 __ / __ A: Push; 1-10V; DALI-2 Bi-volt Compositions and finishes can not be changed. Extra cable length.	     
2515	Finishes 62/ __ Green, Chocolate and Off-White (Pantone 5645, RAL 8019, NCS S 2005-Y20R)	LED Colour Temperature /1 _ 2700 K - 1940 lm CRI >90 /3 _ 3500 K - 2050 lm CRI >80 	Control 2515 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Diffuser: PC- Polycarbonate. Body: PU- Polyurethane. Canopy: Steel. Light Source and electronics 4 x LED 4,5 W 350 mA Constant Current 350 mA 110-240V 50/60Hz	Packaging 1 Box 0,76 x 0,76 x 0,27 m Vol 0,1560 m³ Gross weight 10,94 Kg Net weight 7,04 Kg Notes 2515 __ / __ A: Push; 1-10V; DALI-2 Bi-volt Compositions and finishes can not be changed. Extra cable length.	     
2516	Finishes 62/ __ Green, White and Chocolate (PANTONE 5645, RAL 9010, RAL 8019)	LED Colour Temperature /1 _ 2700 K - 1940 lm CRI >90 /3 _ 3500 K - 2050 lm CRI >80 	Control 2516 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Diffuser: PC- Polycarbonate. Body: PU- Polyurethane. Canopy: Steel. Light Source and electronics 4 x LED 4,5 W 350 mA 2x LED 1 W 350 mA Constant Current 350 mA 110-240V 50/60Hz	Packaging 1 Box 0,73x0,73x0,32 m Vol 0,1705 m³ Gross weight 14,62 Kg Net weight 15,5 Kg Notes 2516 __ / __ A: Push; 1-10V; DALI-2 Bi-volt Compositions and finishes can not be changed. Extra cable length.	     




Structural

Design by Arik Levy

Structural's cubic forms pair with slender metal rods that both join and separate the volumes, providing points of light connected in space. Its design deconstructs the light source and casts it in unexpected places, creating sculptural pieces integrated in the architecture.

Wall

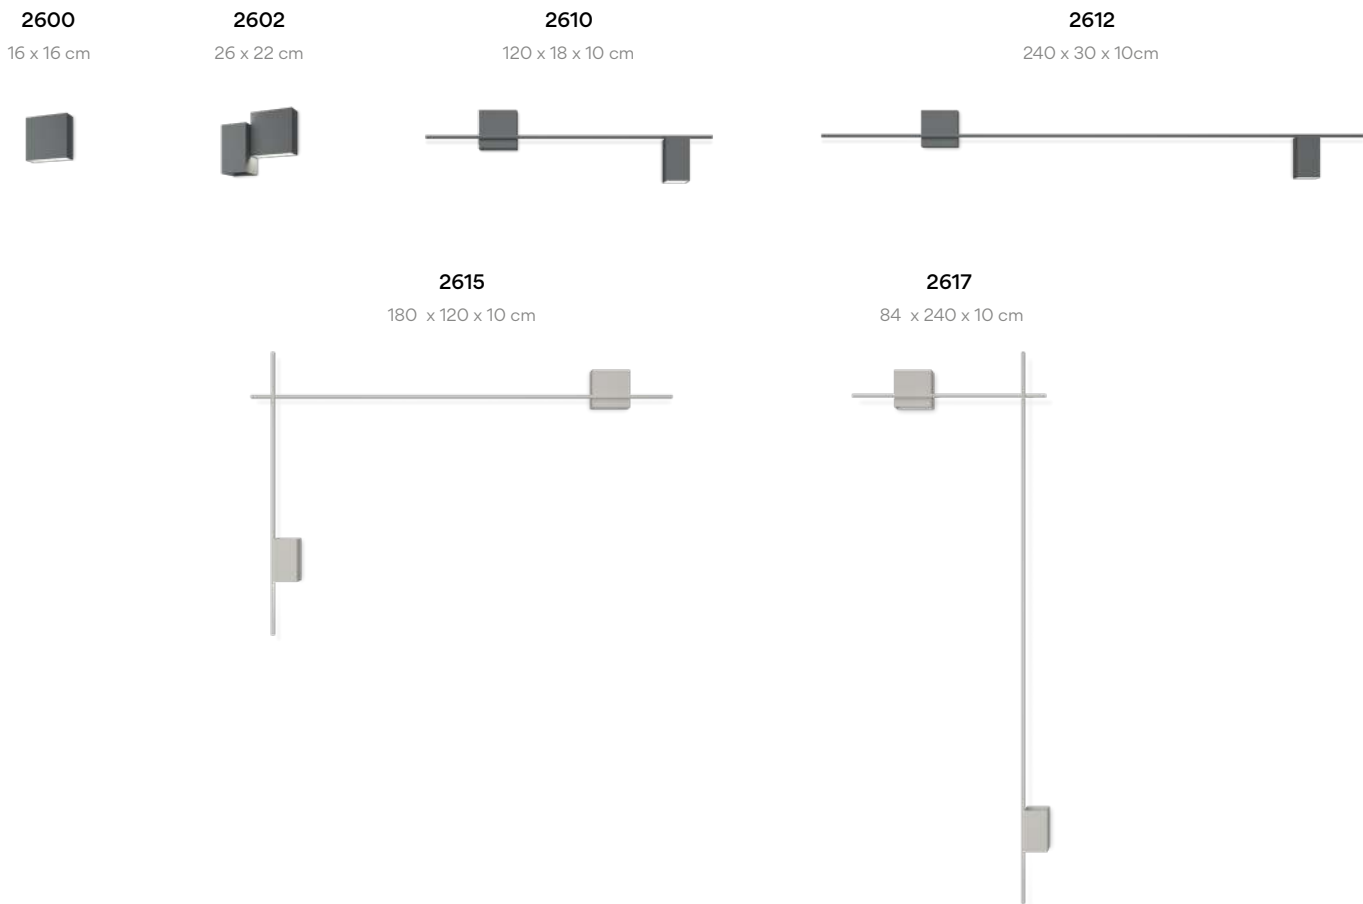

2600	Finishes ● 15/ _ _ Grey L2 (NCS S 2500-N) ● 21/ _ _ Black Grey (NCS S 7000-N) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 700 lm F /2 _ 3000 K - 756 lm /3 _ 3500 K - 763 lm E CRI >90	Control 2600 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
	Materials Diffuser: PC- Polycarbonate. Main body: Aluminum. Structures: Aluminum.	Packaging 1 Box 0,4 x 0,4 x 0,2 m Vol 0,032 m³ Gross weight 1,35 Kg Net weight 0,9 Kg	
	Light Source and electronics 1 x LED PLATE 24V 6 W Constant Voltage 24V 110~240V 50/60Hz	Notes 2600 _ _ / _ 1: DALI-2 Multi-volt 2600 _ _ / _ 3: 1-10V Multi-volt LED ⚡ IP20 CE [] [] []	

2602

Finishes	LED Colour Temperature
● 15/ _ _ Grey L2 (NCS S 2500-N)	/1 _ 2700 K - 1400 lm F
● 21/ _ _ Black Grey (NCS S 7000-N)	/2 _ 3000 K - 1513 lm
Finish customization (Available options: Vibia colour palette.	/3 _ 3500 K - 1526 lm E
Minimum quantity 10 units. Price + 10%)	CRI >90

Control

2602 _ _ / _ _

_ _ / _ **1** DALI-2

_ _ / _ **3** 1-10V

_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m³
Gross weight 2,85 Kg Net weight 1,9 Kg

Notes

2602 _ _ / _ 1: DALI-2 **Multi-volt**

2602 _ _ / _ 3: 1-10V **Multi-volt**

* Electrical connection point.

LED  IP20  CE  UK  ENEC 

2610

Finishes	LED Colour Temperature
● 15/ _ _ Grey L2 (NCS S 2500-N)	/1 _ 2700 K - 1400 lm F
● 21/ _ _ Black Grey (NCS S 7000-N)	/2 _ 3000 K - 1513 lm
Finish customization (Available options: Vibia colour palette.	/3 _ 3500 K - 1526 lm E
Minimum quantity 10 units. Price + 10%)	CRI >90

Control

2610 _ _ / _ _

_ _ / _ **1** DALI-2

_ _ / _ **3** 1-10V

_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,036 m³
Gross weight 3,6 Kg Net weight 2,4 Kg

Notes

2610 _ _ / _ 1: DALI-2 **Multi-volt**

2610 _ _ / _ 3: 1-10V **Multi-volt**

* Electrical connection point.

LED  IP20  CE  UK  ENEC 

2612

Finishes	LED Colour Temperature
● 15/ _ _ Grey L2 (NCS S 2500-N)	/1 _ 2700 K - 1400 lm F
● 21/ _ _ Black Grey (NCS S 7000-N)	/2 _ 3000 K - 1513 lm
Finish customization (Available options: Vibia colour palette.	/3 _ 3500 K - 1526 lm E
Minimum quantity 10 units. Price + 10%)	CRI >90

Control

2612 _ _ / _ _

_ _ / _ **1** DALI-2

_ _ / _ **3** 1-10V

_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,042 m³
Gross weight 3,9 Kg Net weight 2,6 Kg

Notes

2612 _ _ / _ 1: DALI-2 **Multi-volt**

2612 _ _ / _ 3: 1-10V **Multi-volt**

* Electrical connection point.

LED  IP20  CE  UK  ENEC 

2615	Finishes 15/ _ _ Grey L2 (NCS S 2500-N) 21/ _ _ Black Grey (NCS S 7000-N) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%) *	LED Colour Temperature /1 _ 2700 K - 1400 lm F /2 _ 3000 K - 1513 lm /3 _ 3500 K - 1526 lm E CRI >90	Control 2615 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
2617	Materials Diffuser: PC- Polycarbonate. Main body: Aluminum. Structures: Aluminum. Light Source and electronics 2 x LED PLATE 24V 6 W Constant Voltage 24V 110~240V 50/60Hz *	Packaging 2 Boxes Total Vol 0,038 m³ Gross weight 4,35 Kg Net weight 2,9 Kg Notes 2615 _ _ / _ 1: DALI-2 Multi-volt 2615 _ _ / _ 3: 1-10V Multi-volt * Electrical connection point. LED IP20 CE UK ERC	Control 2617 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
2617	Materials Diffuser: PC- Polycarbonate. Main body: Aluminum. Structures: Aluminum. Light Source and electronics 2 x LED PLATE 24V 6 W Constant Voltage 24V 110~240V 50/60Hz *	Packaging 2 Boxes Total Vol 0,041 m³ Gross weight 4,35 Kg Net weight 2,9 Kg Notes 2617 _ _ / _ 1: DALI-2 Multi-volt 2617 _ _ / _ 3: 1-10V Multi-volt * Electrical connection point. LED IP20 CE UK ERC	Control 2617 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi

Ceiling

2630
18 x 21 cm



2632
24 x 15cm



2634
48 x 13 cm



2640
120 x 21 cm



2642
160 x 15 cm



2645
120 x 21 cm



2647
160 x 21 cm



2630

- Finishes**
- 15/ _ _ Grey L2 (NCS S 2500-N)
 - 21/ _ _ Black Grey (NCS S 7000-N)
- Finish customization**
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 998 lm
[F] >

/2 _ 3000 K - 1078 lm
/3 _ 3500 K - 1087 lm
[E] >

Tunable White
/8 _ (2200 K - 4000 K)
820 lm - 1060 lm
[G] > - [F] >

CRI >90

Control

2630 _ _ / _ _

_ _ / _ 1 Static White + DALI-2
_ _ / _ 3 Static White + 1-10V
_ _ / _ Z Static White + Casambi

_ _ / 81 Tunable White + DALI-2 DT8
_ _ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
Constant Voltage 24V
110-240V 50/60Hz

Packaging

1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m³
Gross weight 3,75 Kg Net weight 2,5 Kg

Notes

2630 _ _ / _ 1: Static White + DALI-2
2630 _ _ / _ 3: Static White + 1-10V
2630 _ _ / 81: Tunable White + DALI-2 DT8

Bi-volt

Multi-volt

Multi-volt

LED IP20 CE UK ENE

2632

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 2049 lm

E

/2 _ 3000 K - 2214 lm

/3 _ 3500 K - 2233 lm

D

Tunable White

/8 _ (2200 K - 4000 K)
1699 lm - 2188 lm

F

 -

E

CRI >90

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 15 W
Constant Voltage 24V
110~240V 50/60Hz

Control

2632 _ _ / _ _

_ _ / _ 1 Static White + DALI-2

_ _ / _ 3 Static White + 1-10V

_ _ / _ Z Static White + Casambi

_ _ / 81 Tunable White + DALI-2 DT8

_ _ / 8Z Tunable White + Casambi

Packaging

1 Box 0,34 x 0,34 x 0,25 m
Vol 0,029 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

Notes

2632 _ _ / _ 1: Static White + DALI-2

Bi-volt

2632 _ _ / 81: Tunable White + DALI-2 DT8

Multi-volt

LED

IP20

CE

UK

EN60598-1

RoHS

2634

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 4098 lm

E

/2 _ 3000 K - 4428 lm

/3 _ 3500 K - 4466 lm

D

Tunable White

/8 _ (2200 K - 4000 K)
3398 lm - 4376 lm

F

 -

E

CRI >90

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Control

2634 _ _ / _ _

_ _ / _ 1 Static White + DALI-2

_ _ / _ 3 Static White + 1-10V

_ _ / _ Z Static White + Casambi

_ _ / 81 Tunable White + DALI-2 DT8

_ _ / 8Z Tunable White + Casambi

Packaging

1 Box 0,58 x 0,34 x 0,23 m
Vol 0,045 m³
Gross weight 5,85 Kg Net weight 3,9 Kg

Notes

2634 _ _ / _ 1: Static White + DALI-2

Multi-volt

2634 _ _ / _ 3: Static White + 1-10V

Multi-volt

2634 _ _ / 81: Tunable White + DALI-2 DT8

Multi-volt

LED

IP20

CE

UK

EN60598-1

RoHS

2640

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 3047 lm

E

/2 _ 3000 K - 3292 lm

/3 _ 3500 K - 3320 lm

D

Tunable White

/8 _ (2200 K - 4000 K)
2519 lm - 3248 lm

F

 -

E

CRI >90

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
Constant Voltage 24V
110~240V 50/60Hz

Control

2640 _ _ / _ _

_ _ / _ 1 Static White + DALI-2

_ _ / _ 3 Static White + 1-10V

_ _ / _ Z Static White + Casambi

_ _ / 81 Tunable White + DALI-2 DT8

_ _ / 8Z Tunable White + Casambi

Packaging

3 Boxes
Total Vol 0,15 m³
Gross weight 8,25 Kg Net weight 5,5 Kg

Notes

2640 _ _ / _ 1: Static White + DALI-2

Multi-volt

2640 _ _ / _ 3: Static White + 1-10V

Multi-volt

* Electrical connection point.

LED

IP20

CE

UK

EN60598-1

RoHS

2642

Finishes

- 15/ __ Grey L2 (NCS S 2500-N)
- 21/ __ Black Grey (NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 6147 lm
E

/2 _ 3000 K - 6642 lm
/3 _ 3500 K - 6699 lm
D

Tunable White
/8 _ (2200 K - 4000 K)
5097 lm - 6564 lm
F - E
CRI >90

Control

2642 __ / __

__ / __ 1 Static White + DALI-2
__ / __ 3 Static White + 1-10V
__ / __ Z Static White + Casambi

__ / 81 Tunable White + DALI-2 DT8
__ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 15 W
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,25 x 0,60 x 1,7 m
Vol 0,255 m³
Gross weight 11,25 Kg Net weight 7,5 Kg

Notes

2642 __ / __ 1: Static White + DALI-2 **Multi-volt**
2642 __ / __ 3: Static White + 1-10V **Multi-volt**

* Electrical connection point.

LED IP20 CE UK ENE

2645

Finishes

- 15/ __ Grey L2 (NCS S 2500-N)
- 21/ __ Black Grey (NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 7145 lm
E

/2 _ 3000 K - 7720 lm
/3 _ 3500 K - 7786 lm
D

Tunable White
/8 _ (2200 K - 4000 K)
5917 lm - 7624 lm
F - E
CRI >90

Control

2645 __ / __

__ / __ 1 Static White + DALI-2
__ / __ 3 Static White + 1-10V
__ / __ Z Static White + Casambi

__ / 81 Tunable White + DALI-2 DT8
__ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,25 x 1,2 x 1,2 m
Vol 0,42 m³
Gross weight 14,25 Kg Net weight 9,25 Kg

Notes

2645 __ / __ 1: Static White + DALI-2 **Multi-volt**
2645 __ / __ 3: Static White + 1-10V **Multi-volt**

* Electrical connection point.

LED IP20 CE UK ENE

2647

Finishes

- 15/ __ Grey L2 (NCS S 2500-N)
- 21/ __ Black Grey (NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 7145 lm
E

/2 _ 3000 K - 7720 lm
/3 _ 3500 K - 7786 lm
D

Tunable White
/8 _ (2200 K - 4000 K)
5917 lm - 7624 lm
F - E
CRI >90

Control

2647 __ / __

__ / __ 1 Static White + DALI-2
__ / __ 3 Static White + 1-10V
__ / __ Z Static White + Casambi

__ / 81 Tunable White + DALI-2 DT8
__ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,25 x 1,7 x 1,7 m
Vol 0,72 m³
Gross weight 15,3 Kg Net weight 10,2 Kg

Notes

2647 __ / __ 1: Static White + DALI-2 **Multi-volt**
2647 __ / __ 3: Static White + 1-10V **Multi-volt**

* Electrical connection point.

LED IP20 CE UK ENE

Class

Design by Sebastian Herkner

A timeless and elegant solution for outdoor environments, Class combines the refined aesthetic of a patio light with the functional performance of a bollard. Consisting of a durable aluminum shaft and fluted glass diffuser, it washes the space with a gentle luminescence.

Outdoor



2810

28 x 250 cm



2815

28 x 250 cm



2800

22 x 78,5 cm



2805

22 x 78,5 cm



2820

18 x 60 cm



2825

18 x 96 cm

2800

Finishes

- **11/ _ _ Black**
(NCS S 8500-N)

LED Colour Temperature

/1_ 2700 K - 1188 lm

G

CRI >90

Control

2800 _ _ / _ _

_ _ / **11** DALI-2

_ _ / **15** Push

_ _ / **1Z** **30** Casambi (Remote)

Materials

Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics

1 x LED 3,5W 150 mA
Constant Current 150 mA
220~240V. 50/60Hz

Packaging

2 Boxes
Box 1: 0,95 x 0,30 x 0,30 m
Box 2: 0,31 x 0,31 x 0,21 m
Total Vol 0,11 m³
Gross weight 11,6 Kg Net weight 9,6 Kg

LED **IP65** **CE** **UK** **ERC** **RoHS** **REACH**

2805

Finishes

- **11/ _ _ Black**
(NCS S 8500-N)

LED Colour Temperature

/1_ 2700 K - 2376 lm

G

CRI >90

Control

2805 _ _ / _ _

_ _ / **11** DALI-2

_ _ / **15** Push

_ _ / **1Z** **30** Casambi (Remote)

Materials

Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics

2 x LED 3,5W 150 mA
Constant Current 300 mA
220~240V. 50/60Hz

Packaging

2 Boxes
Box 1: 0,95 x 0,30 x 0,30 m
Box 2: 0,31 x 0,31 x 0,21 m
Total Vol 0,11 m³
Gross weight 14,8 Kg Net weight 12,8 Kg

LED **IP65** **CE** **UK** **ERC** **RoHS** **REACH**

2810	Finishes 11/ __ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 2376 lm G CRI >90	Control 2810 __ / __ __ / 11 DALI-2 __ / 15 Push __ / 1Z _30 Casambi (Remote)
	Materials Body: Aluminum. Glass: Borosilicate glass. Diffuser: Opal PC- Polycarbonate. Light Source and electronics 1 x LED 7W 300 mA Constant Current 300 mA 220~240V. 50/60Hz	Packaging 2 Boxes Box 1: 2,92 x 0,32 x 0,32 m Box 2: 0,37 x 0,32 x 0,22 m Total Vol 0,33 m³ Gross weight 20,5 Kg Net weight 17,5 Kg LED IP65 CE UK EAC Dimmer	
2815	Finishes 11/ __ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 4752 lm G CRI >90	Control 2815 __ / __ __ / 11 DALI-2 __ / 15 Push __ / 1Z _30 Casambi (Remote)
	Materials Body: Aluminum. Glass: Borosilicate glass. Diffuser: Opal PC- Polycarbonate. Light Source and electronics 2 x LED 7W 300 mA Constant Current 600 mA 220~240V. 50/60Hz	Packaging 2 Boxes Box 1: 2,92 x 0,32 x 0,32 m Box 2: 0,37 x 0,32 x 0,22 m Total Vol 0,33 m³ Gross weight 28,4 Kg Net weight 25,4 Kg LED IP65 CE UK EAC 47	
2820	Finishes 11/ __ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 1188 lm G CRI >90	Control 2820 __ / __ __ / 11 DALI-2 __ / 15 Push __ / 1Z _30 Casambi (Remote)
	Materials Body: Aluminum. Glass: Borosilicate glass. Diffuser: Opal PC- Polycarbonate. Light Source and electronics 1 x LED 3,5W 150 mA Constant Current 150 mA 220~240V. 50/60Hz	Packaging 1 Box 0,95 x 0,40 x 0,20 m Vol 0,08 m³ Gross weight 4,4 Kg Net weight 2,9 Kg LED IP65 CE UK EAC	
2825	Finishes 11/ __ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 2376 lm G CRI >90	Control 2825 __ / __ __ / 11 DALI-2 __ / 15 Push __ / 1Z _30 Casambi (Remote)
	Materials Body: Aluminum. Glass: Borosilicate glass. Diffuser: Opal PC- Polycarbonate. Light Source and electronics 1 x LED 7W 300 mA Constant Current 300 mA 220~240V. 50/60Hz	Packaging 1 Box 0,95 x 0,30 x 0,30 m Vol 0,09 m³ Gross weight 6,4 Kg Net weight 4,40 Kg LED IP65 CE UK EAC	

Dama

Design by Ludovica+Roberto Palomba

Dama is a homage to the classic lamp, ideal for shaping an intimate atmosphere with an elevated aesthetic. Combining technical quality with a layer of warmth and intimacy, the collection connects the charm of tradition with the finesse of contemporary lighting design.

Table Floor Pendant



3225

- Finishes**
- 11/ _ _ Black
(NCS S 8500-N)
 - 25/ _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 2170 lm
E
CRI >90

Control

3225 _ _ / _ _

_ _ / 15 Push

_ _ / 12 Casambi

Materials

Tube: Steel.
Base: Zinc Alloy.
Shade: Paper.

Light Source and electronics

1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100~240V. 50/60Hz

Packaging

1 Box 0,75 x 0,55 x 0,55 m
Vol 0,23 m³
Gross weight 3,3 Kg Net weight 1,8 Kg

Notes

3225 _ _ / _ 5: Push **Multi-volt**

Switch on the cable. Electric cable 2,5 m.

LED IP20 CE UK ENE

3230

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **25/** _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature
/1_ 2700 K - 2170 lm
E 
CRI >90

Control
3230 _ _ / _ _
_ _ / **15** Push
_ _ / **1Z** Casambi

Materials

Tube: Steel.
Base: Zinc Alloy.
Shade: Paper.

Light Source and electronics
1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100~240V. 50/60Hz

Packaging

1 Box 1,6 x 0,55 x 0,55 m
Vol 0,48 m³
Gross weight 5 Kg Net weight 2,55 Kg

Notes

3230 _ _ / _ 5: Push **Multi-volt**
Switch on the cable. Electric cable 2,5 m.

LED  IP20    

3235

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **25/** _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature
/1_ 2700 K - 2170 lm
E 
CRI >90

Control
3235 _ _ / _ _
_ _ / **11** DALI-2
_ _ / **1B** Push; 1-10V
_ _ / **1Z** Casambi



 Select Electrical connection




Surface



Free Wire



Built-in XS



Remote
Micro



Remote
XXS

Materials

Body: Aluminum.
Shade: Paper.

Light Source and electronics
1 x LED STRIP 16,7 W 900 mA
Constant Current 900 mA
110~240V. 50/60Hz

Packaging

1 Box 0,40 x 0,55 x 0,55 m
Vol 0,12 m³
Gross weight 3,2 Kg Net weight 1,6 Kg

Notes

Extra cable length.

LED  IP20    



Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 3235

Drop ceiling



Ø 3 cm
height 7 cm
for plaster
ceilings.
Black finish.



Ø 6 cm
height 6 cm
for all types
of drop
ceilings.
Match with
fixture finish.



Ø 8 cm
height 6 cm
match with
fixture finish.

Regular ceiling



Ø 20 cm
match with
fixture finish.



Ø 20 cm



Ø 22 cm



Ø 36 cm



Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote

Built-in





Circle

Combining accent, diffuse and general lighting effects with dynamic control and temperature regulation, Circle is a highly-functional complementary product designed to curate a nuanced ambience.

Ceiling - Accent Downlight - Colour



Ø 7 cm

Trim

3300 Narrow
3303 Medium
3306 Wide



Ø 6 cm

Trimless

3310 Narrow
3313 Medium
3316 Wide



Ø 11 cm

Trim

3320 Narrow
3323 Medium
3326 Wide

Ø 10 cm

Trimless

3330 Narrow
3333 Medium
3336 Wide

Ceiling - Accent Downlight - Wood



Ø 7 cm

Trim

3300 Narrow
3303 Medium
3306 Wide



Ø 6 cm

Trimless

3310 Narrow
3313 Medium
3316 Wide



Ø 11 cm

Trim

3320 Narrow
3323 Medium
3326 Wide

Ø 10 cm

Trimless

3330 Narrow
3333 Medium
3336 Wide

3300
TRIM Narrow
3303
TRIM Medium
3306
TRIM Wide

Finishes
● **11/** _ _ Black
(NCS S 8500-N)
● **23/** _ _ Warm White
(NCS S 0502-Y50R)
● **24/** _ _ Beige M1
(NCS S 2005-Y50R)
● **37/** _ _ Terra Red
(NCS S 4040-Y70R)

LED Colour Temperature
Static White
/1_ 2700 K - 607 lm
/2_ 3000 K - 634 lm
/3_ 3500 K - 657 lm
Tunable White
/8_ (1800 K - 4000 K)
308 lm - 504 lm
Dim-To-Warm
/F_ (1800 K - 3000 K)
611 lm
F
CRI >90

Control
3300 _ _ / _ _
3303 _ _ / _ _
3306 _ _ / _ _
_ _ / _ **O** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi
_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi
_ _ / **F1** Dim-To-Warm + DALI-2
_ _ / **FB** Dim-To-Warm + Push; 1-10V
_ _ / **FM** Dim-To-Warm + Without driver
_ _ / **FZ** Dim-To-Warm + Casambi

Finishes
● **82/** _ _ White oak
● **83/** _ _ American
walnut

LED Colour Temperature
Static White
/1_ 2700 K - 607 lm
/2_ 3000 K - 634 lm
/3_ 3500 K - 657 lm
Tunable White
/8_ (1800 K - 4000 K)
308 lm - 504 lm
Dim-To-Warm
/F_ (1800 K - 3000 K)
611 lm
F
CRI >90

Control
3300 _ _ / _ _
3303 _ _ / _ _
3306 _ _ / _ _
_ _ / _ **O** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi
_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi
_ _ / **F1** Dim-To-Warm + DALI-2
_ _ / **FB** Dim-To-Warm + Push; 1-10V
_ _ / **FM** Dim-To-Warm + Without driver
_ _ / **FZ** Dim-To-Warm + Casambi


Materials
Body: Aluminum.
Shade: PC- Polycarbonate/ Wood.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 6,2 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz
Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
220~240V 50/60Hz
Dim-To-Warm:
1 x LED 5,8 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,15 x 0,15 x 0,15 m
Vol 0,003 m³
Gross weight 0,5 Kg Net weight 0,33 Kg

Notes
3300 _ _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**
3300 _ _ / FB: Dim-To-Warm + Push; 1-10V **Bi-volt**
3303 _ _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**
3303 _ _ / FB: Dim-To-Warm + Push; 1-10V **Bi-volt**
3306 _ _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**
3306 _ _ / FB: Dim-To-Warm + Push; 1-10V **Bi-volt**
Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED         Ø 6 cm

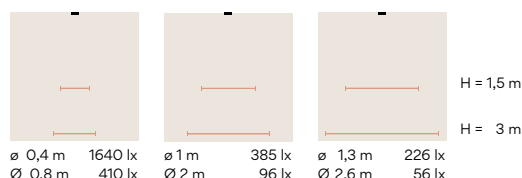

3310 TRIMLESS Narrow	Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R) ● 37/ _ _ Terra Red (NCS S 4040-Y70R)	LED Colour Temperature Static White /1 _ 2700 K - 607 lm /2 _ 3000 K - 634 lm /3 _ 3500 K - 657 lm Tunable White /8 _ (1800 K - 4000 K) 308 lm - 504 lm Dim-To-Warm /F _ (1800 K - 3000 K) 611 lm  CRI >90	Control 3310 _ _ / _ _ 3313 _ _ / _ _ 3316 _ _ / _ _ _ _ / _ O Static White + On/ Off _ _ / _ D Static White + Push, DALI-2 _ _ / _ M Static White + Without driver _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi _ _ / F1 Dim-To-Warm + DALI-2 _ _ / FB Dim-To-Warm + Push; 1-10V _ _ / FM Dim-To-Warm + Without driver _ _ / FZ Dim-To-Warm + Casambi
--------------------------------	--	---	--

Finishes ● 82/ _ _ White oak ● 83/ _ _ American walnut	LED Colour Temperature Static White /1 _ 2700 K - 607 lm /2 _ 3000 K - 634 lm /3 _ 3500 K - 657 lm Tunable White /8 _ (1800 K - 4000 K) 308 lm - 504 lm Dim-To-Warm /F _ (1800 K - 3000 K) 611 lm  CRI >90	Control 3310 _ _ / _ _ 3313 _ _ / _ _ 3316 _ _ / _ _ _ _ / _ O Static White + On/ Off _ _ / _ D Static White + Push, DALI-2 _ _ / _ M Static White + Without driver _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi _ _ / F1 Dim-To-Warm + DALI-2 _ _ / FB Dim-To-Warm + Push; 1-10V _ _ / FM Dim-To-Warm + Without driver _ _ / FZ Dim-To-Warm + Casambi
--	---	--


Materials
Body: Aluminum.
Shade: PC- Polycarbonate/ Wood.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 6,2 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz
Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
220~240V 50/60Hz
Dim-To-Warm:
1 x LED 5,8 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,002 m³
Gross weight 0,6 Kg Net weight 0,43 Kg

Notes
3310 _ _ / F1: Dim-To-Warm + DALI-2 
3310 _ _ / FB: Dim-To-Warm + Push; 1-10V 
3313 _ _ / F1: Dim-To-Warm + DALI-2 
3313 _ _ / FB: Dim-To-Warm + Push; 1-10V 
3316 _ _ / F1: Dim-To-Warm + DALI-2 
3316 _ _ / FB: Dim-To-Warm + Push; 1-10V 
Trimless frame can be shipped beforehand.
Visit vibia.com to group several pieces with just one electrical point, only for Static White.



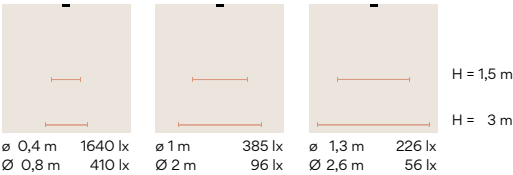

3320
TRIM Narrow

3323
TRIM Medium

3326
TRIM Wide

Finishes

● **11/** _ _ Black
(NCS S 8500-N)

● **23/** _ _ Warm White
(NCS S 0502-Y50R)

● **24/** _ _ Beige M1
(NCS S 2005-Y50R)

● **37/** _ _ Terra Red
(NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K)
1258 lm

F

CRI >90

Control

3320 _ _ / _ _
3323 _ _ / _ _
3326 _ _ / _ _

_ _ / _ **O** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

_ _ / **F1** Dim-To-Warm + DALI-2
_ _ / **FB** Dim-To-Warm + Push; 1-10V
_ _ / **FM** Dim-To-Warm + Without driver
_ _ / **FZ** Dim-To-Warm + Casambi

Finishes

● **82/** _ _ White oak

● **83/** _ _ American walnut

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K)
1258 lm

F

CRI >90

Control

3320 _ _ / _ _
3323 _ _ / _ _
3326 _ _ / _ _

_ _ / _ **O** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

_ _ / **F1** Dim-To-Warm + DALI-2
_ _ / **FB** Dim-To-Warm + Push; 1-10V
_ _ / **FM** Dim-To-Warm + Without driver
_ _ / **FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 11,6 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,15 m
Vol 0,003 m³
Gross weight 0,6 Kg Net weight 0,4 Kg


Notes

3320 _ _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**
3320 _ _ / FB: Dim-To-Warm + Push; 1-10V **Bi-volt**
3323 _ _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**
3323 _ _ / FB: Dim-To-Warm + Push; 1-10V **Bi-volt**
3326 _ _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**
3326 _ _ / FB: Dim-To-Warm + Push; 1-10V **Bi-volt**

Trimless frame can be shipped beforehand.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED         Ø 10 cm

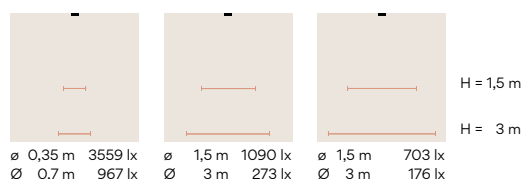

3330

TRIMLESS Narrow

3333

TRIMLESS Medium

3336

TRIMLESS Wide

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **23/** _ _ Warm White
(NCS S 0502-Y50R)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)

LED Colour Temperature

Static White

- /1 _ 2700 K - 1256 lm
- /2 _ 3000 K - 1313 lm
- /3 _ 3500 K - 1360 lm

Tunable White

- /8 _ (1800 K - 4000 K)
571 lm - 895 lm

Dim-To-Warm

- /F _ (1800 K - 3000 K)
1258 lm

F

CRI >90

Control

3330 _ _ / _ _**3333** _ _ / _ _**3336** _ _ / _ _

- _ _ / _ **O** Static White + On/ Off
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

- _ _ / **F1** Dim-To-Warm + DALI-2
- _ _ / **FB** Dim-To-Warm + Push; 1-10V
- _ _ / **FM** Dim-To-Warm + Without driver
- _ _ / **FZ** Dim-To-Warm + Casambi

Finishes

- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

Static White

- /1 _ 2700 K - 1256 lm
- /2 _ 3000 K - 1313 lm
- /3 _ 3500 K - 1360 lm

Tunable White

- /8 _ (1800 K - 4000 K)
571 lm - 895 lm

Dim-To-Warm

- /F _ (1800 K - 3000 K)
1258 lm

F

CRI >90

Control

3330 _ _ / _ _**3333** _ _ / _ _**3336** _ _ / _ _

- _ _ / _ **O** Static White + On/ Off
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

- _ _ / **F1** Dim-To-Warm + DALI-2
- _ _ / **FB** Dim-To-Warm + Push; 1-10V
- _ _ / **FM** Dim-To-Warm + Without driver
- _ _ / **FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.

Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 12,4 W 700 mA
Constant Current 700 mA
220-240V 50/60Hz

Tunable White:

1 x LED 8,9 W 500 mA
Constant Current 500 mA
220-240V 50/60Hz

Dim-To-Warm:

1 x LED 11,6 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

2 Boxes

Total Vol 0,002 m³

Gross weight 0,75 Kg Net weight 0,55 Kg


Notes

- 3330 _ _ / F1: Dim-To-Warm + DALI-2
- 3330 _ _ / FB: Dim-To-Warm + Push; 1-10V
- 3333 _ _ / F1: Dim-To-Warm + DALI-2
- 3333 _ _ / FB: Dim-To-Warm + Push; 1-10V
- 3336 _ _ / F1: Dim-To-Warm + DALI-2
- 3336 _ _ / FB: Dim-To-Warm + Push; 1-10V

Trimless frame can be shipped beforehand.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED         Ø 11 cm

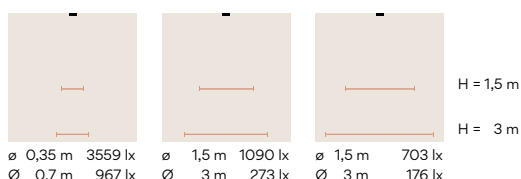



Ceiling - Wall Washer



Ø 11 cm

3350



Ø 10 cm

3353

3350
TRIM

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

37/ _ _ Terra Red
(NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1_ 2700 K - 914 lm
/2_ 3000 K - 956 lm
/3_ 3500 K - 990 lm

E

Tunable White
/8_ (1800 K - 4000 K)
571 lm - 895 lm

Dim-To-Warm
/F_ (1800 K - 3000 K)
1258 lm

F

CRI >90

Control

3350 _ _ / _ _

_ _ / _ **O** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

_ _ / **F1** Dim-To-Warm + DALI-2
_ _ / **FB** Dim-To-Warm + Push; 1-10V
_ _ / **FM** Dim-To-Warm + Without driver
_ _ / **FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,4 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 11,6 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,1 m
Vol 0,002 m³
Gross weight 0,6 Kg Net weight 0,4 Kg

Notes

3350 _ _ / F1: Dim-To-Warm + DALI-2

Bi-volt

3350 _ _ / FB: Dim-To-Warm + Push; 1-10V

Bi-volt

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED


↑ IP20
↓ IP40

CE

UK

ERC

Ø 10 cm



3353
 TRIMLESS

Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R)	Static White /1 _ 2700 K - lm /2 _ 3000 K - lm /3 _ 3500 K - lm E  Tunable White /8 _ (1800 K - 4000 K) 571 lm - 895 lm Dim-To-Warm /F _ (1800 K - 3000 K) 1258 lm F  CRI >90	3353 _ _ / _ _ _ _ / O Static White + On/ Off _ _ / D Static White + Push, DALI-2 _ _ / M Static White + Without driver _ _ / Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi _ _ / F1 Dim-To-Warm + DALI-2 _ _ / FB Dim-To-Warm + Push; 1-10V _ _ / FM Dim-To-Warm + Without driver _ _ / FZ Dim-To-Warm + Casambi

Materials

Body: Aluminum.
 Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 6 W 300 mA
 Constant Current 300 mA
 220~240V 50/60Hz

Tunable White:

1 x LED 8,9 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Dim-To-Warm:

1 x LED 11,6 W 350 mA
 Constant Current 350 mA
 110~240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,006 m³
 Gross weight 0,6 Kg Net weight 0,4 Kg

Notes


3353 _ _ / F1: Dim-To-Warm + DALI-2 **Bi-volt**

3353 _ _ / FB: Dim-To-Warm + Push; 1-10V **Bi-volt**

Trimless frame can be shipped beforehand.

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED         Ø 11 cm

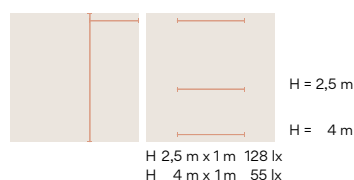

Ceiling - Flat Diffuser



Ø 36 cm

3360



Ø 47 cm

3363

3360

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 23/ _ _ Warm White
(NCS S 0502-Y50R)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)

LED Colour Temperature

Static White

/1_ 2700 K - 1800 lm

/2_ 3000 K - 1890 lm

/3_ 3500 K - 1926 lm

/E_

Tunable White

/8_ (2200 K - 4000 K)

1607 lm - 2186 lm

/E_

CRI >90

Control

3360 _ _ / _ _

_ _ / _ O Static White + On/ Off

_ _ / _ D Static White + Push, DALI-2

_ _ / _ M Static White + Without driver

_ _ / _ Z Static White + Casambi

_ _ / 81 Tunable White + DALI-2 DT8

_ _ / 8M Tunable White + Without driver

_ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum. Diffuser: PMMA.
Shade: PC-Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED PLATE 17,4 W 500 mA

Constant Current 500 mA

220~240V 50/60Hz

Tunable White:

1 x LED PLATE 17,1 W 500 mA

Constant Current 500 mA

220~240V 50/60Hz

Packaging

1 Box 0,48 x 0,48 x 0,12 m

Vol 0,03 m³

Gross weight 2,4 Kg Net weight 2 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED IP20 CE UK ENE

Ø 35 cm

3363

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 23/ _ _ Warm White
(NCS S 0502-Y50R)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)

LED Colour Temperature

Static White

/1_ 2700 K - 2798 lm

/2_ 3000 K - 2938 lm

/3_ 3500 K - 2994 lm

/E_

Tunable White

/8_ (2200 K - 4000 K)

2471 lm - 3198 lm

/E_

CRI >90

Control

3363 _ _ / _ _

_ _ / _ O Static White + On/ Off

_ _ / _ A Static White +
Push; 1-10V; DALI-2

_ _ / _ M Static White + Without driver

_ _ / _ Z Static White + Casambi

_ _ / 81 Tunable White + DALI-2 DT8

_ _ / 8M Tunable White + Without driver

_ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum. Diffuser: PMMA.
Shade: PC-Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED PLATE 25,6 W 550 mA

Constant Current 550 mA

220~240V 50/60Hz

Tunable White:

1 x LED PLATE 25,8 W 650 mA

Constant Current 650 mA

220~240V 50/60Hz

Packaging

1 Box 0,68 x 0,68 x 0,12 m

Vol 0,055 m³

Gross weight 3,4 Kg Net weight 2,9 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED IP20 CE UK ENE

Ø 46 cm



Line

Line consists of a series of simple linear luminaires, each with a distinct lighting effect. Integrating dynamic control and subtle gradients in intensity, tone and colour, the collection complements Vibia's wider product range to curate a subtle atmosphere.

Ceiling - High Comfort Diffuser



3500 Trim
14 x 4 cm



3503 Trimless
13 x 3 cm



3505 Trim
27 x 4 cm



3508 Trimless
26 x 3 cm



3510 Trim
53 x 4 cm



3513 Trimless
51 x 3 cm




3515 Trim
104 x 4 cm




3518 Trimless
102 x 3 cm

TRIM



TRIMLESS



3500

TRIM
UGR <21

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 23/  Warm White (NCS S 0502-Y50R)	Static White /1 2700 K - 897 lm /2 3000 K - 928 lm /3 3500 K - 960 lm  Tunable White /8 (2200 K - 4000 K) 642 lm - 701 lm  CRI >90	3500   Static White + On/ Off / D Static White + Push, DALI-2 / M Without driver / Z Static White + Casambi / 81 Tunable White + DALI-2 DT8 / 8M Tunable White + Without driver / 8Z Tunable White + Casambi
Materials Body: Aluminum / PC- Polycarbonate. Shade: PC- Polycarbonate & Bronze. Diffuser: PE- Polyethylene. Frame: PC- Polycarbonate.	Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 7,4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz Tunable White: 1 x LED STRIP 7,2 W Constant Voltage 24VDC 220~240V 50/60Hz	Packaging 1 Box 0,105 x 0,08 x 0,325 m Vol 0,003 m ³ Gross weight 0,5 Kg Net weight 0,35 Kg Notes For Tunable White versions, a grouping driver is recommended. Visit vibia.com to group several pieces with just one electrical point.
		       13,5 x 3,5 cm

3503

TRIMLESS
UGR <21

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 23/  Warm White (NCS S 0502-Y50R)	Static White /1 2700 K - 897 lm /2 3000 K - 928 lm /3 3500 K - 960 lm  Tunable White /8 (2200 K - 4000 K) 642 lm - 701 lm  CRI >90	3503   Static White + On/ Off / D Static White + Push, DALI-2 / M Without driver / Z Static White + Casambi / 81 Tunable White + DALI-2 DT8 / 8M Tunable White + Without driver / 8Z Tunable White + Casambi
Materials Body: Aluminum / PC- Polycarbonate. Shade: PC- Polycarbonate & Bronze. Diffuser: PE- Polyethylene. Trimless frame: Aluminum.	Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 7,4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz Tunable White: 1 x LED STRIP 7,2 W Constant Voltage 24VDC 220~240V 50/60Hz	Packaging 2 Boxes Vol 0,006 m ³ Gross weight 0,825kg Net weight 0,525 kg Notes Trimless frame can be shipped in advance under request. For Tunable White versions, remote driver only required. For Tunable White versions, a grouping driver is recommended. Visit vibia.com to group several pieces with just one electrical point.
		       14,5 x 4 cm

3505
TRIM
UGR <21

Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R)	Static White /1 _ 2700 K - 1674 lm /2 _ 3000 K - 1733 lm /3 _ 3500 K - 1791 lm E Tunable White /8 _ (2200 K - 4000 K) 1221 lm - 1343 lm F CRI >90	3505 _ _ / _ _ _ _ / _ O Static White + On/ Off _ _ / _ D Static White + Push, DALI-2 _ _ / _ M Without driver _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi
Materials Body: Aluminum / PC- Polycarbonate. Shade: PC- Polycarbonate & Bronze. Diffuser: PE- Polyethylene. Frame: PC- Polycarbonate. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 13,7 W 650 mA Constant Current 650 mA 220~240V 50/60Hz Tunable White: 1 x LED STRIP 13,7 W Constant Voltage 24VDC 220~240V 50/60Hz		
Packaging 1 Box 0,105 x 0,08 x 0,325 m Vol 0,003 m³ Gross weight 0,65 Kg Net weight 0,45 Kg Notes For Tunable White versions, a grouping driver is recommended. Visit vibia.com to group several pieces with just one electrical point. LED IP20CEUKEREL 26,2 x 3,5 cm		

3508
TRIMLESS
UGR <21

Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R)	Static White /1 _ 2700 K - 1674 lm /2 _ 3000 K - 1733 lm /3 _ 3500 K - 1791 lm E Tunable White /8 _ (2200 K - 4000 K) 1221 lm - 1343 lm F CRI >90	3508 _ _ / _ _ _ _ / _ O Static White + On/ Off _ _ / _ D Static White + Push, DALI-2 _ _ / _ M Without driver _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi
Materials Body: Aluminum / PC- Polycarbonate. Shade: PC- Polycarbonate & Bronze. Diffuser: PE- Polyethylene. Trimless frame: Aluminum. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 13,7 W 650 mA Constant Current 650 mA 220~240V 50/60Hz Tunable White: 1 x LED STRIP 13,7 W Constant Voltage 24VDC 220~240V 50/60Hz		
Packaging 2 Boxes Total Vol 0,006 m³ Gross weight 1,05 Kg Net weight 0,75 Kg Notes Trimless frame can be shipped in advance under request. For Tunable White versions, a grouping driver is recommended. Visit vibia.com to group several pieces with just one electrical point. LED IP20CEUKEREL 27 x 4 cm		

3510

TRIM
UGR <21

Finishes  11/ _ _ Black (NCS S 8500-N)  23/ _ _ Warm White (NCS S 0502-Y50R)	LED Colour Temperature Static White /1_ 2700 K - 3348 lm /2_ 3000 K - 3466 lm /3_ 3500 K - 3582 lm  Tunable White /8_ (2200 K - 4000 K) 2442 lm - 2686 lm  CRI >90	Control 3510 _ _ / _ _ _ _ / _ O Static White + On/ Off _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ M Static White + Without driver _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi
---	---	--

Materials Body: Aluminum / PC- Polycarbonate. Shade: PC- Polycarbonate & Bronze. Diffuser: PE- Polyethylene. Frame: PC- Polycarbonate. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 27,4 W 650 mA Constant Current 650 mA 220~240V 50/60Hz Tunable White: 1 x LED STRIP 27,4 W Constant Voltage 24VDC 220~240V 50/60Hz	Packaging 1 Box 0,105 x 0,08 x 0,570 m Vol 0,005 m³ Gross weight 1,25 Kg Net weight 0,78 Kg Notes For Tunable White versions, a grouping driver is recommended. Visit vibia.com to group several pieces with just one electrical point.        52 x 3,5 cm
--	--

3513

TRIMLESS
UGR <21

Finishes  11/ __ Black (NCS S 8500-N)  23/ __ Warm White (NCS S 0502-Y50R)	LED Colour Temperature Static White /1_ 2700 K - 3348 lm /2_ 3000 K - 3466 lm /3_ 3500 K - 3582 lm  Tunable White /8_ (2200 K - 4000 K) 2442 lm - 2686 lm  CRI >90	Control 3513 __ / __ __ / __ O Static White + On/ Off __ / __ A Static White + Push; 1-10V; DALI-2 __ / __ M Static White + Without driver __ / __ Z Static White + Casambi __ / 81 Tunable White + DALI-2 DT8 __ / 8M Tunable White + Without driver __ / 8Z Tunable White + Casambi
---	---	---

Materials Body: Aluminum / PC- Polycarbonate. Shade: PC- Polycarbonate & Bronze. Diffuser: PE- Polyethylene. Trimless frame: Aluminum. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 27,4 W 650 mA Constant Current 650 mA 220~240V 50/60Hz Tunable White: 1 x LED STRIP 27,4 W Constant Voltage 24VDC 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,010 m³ Gross weight 2,1 Kg Net weight 1,32 Kg Notes Trimless frame can be shipped in advance under request. For Tunable White versions, a grouping driver is recommended. Visit vibia.com to group several pieces with just one electrical point.        53 x 4 cm
--	---

3515
TRIM
UGR <21

Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R)	Static White /1 _ 2700 K - 6696 lm /2 _ 3000 K - 6932 lm /3 _ 3500 K - 7164 lm E Tunable White /8 _ (2200 K - 4000 K) 4884 lm - 5372 lm F CRI >90	3515 _ _ / _ _ _ _ / _ O Static White + On/ Off _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ M Static White + Without driver _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi

Materials Body: Aluminum / PC- Polycarbonate. Shade: PC- Polycarbonate & Bronze. Diffuser: PE- Polyethylene. Frame: PC- Polycarbonate. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 54,8 W 650 mA Constant Current 650 mA 220~240V 50/60Hz Tunable White: 1 x LED STRIP 54,7 W Constant Voltage 24VDC 220~240V 50/60Hz	Packaging 1 Box 0,105 x 0,08 x 1,095 m Vol 0,009 m³ Gross weight 3,25 Kg Net weight 2,36 Kg Notes For Tunable White versions, a grouping driver is recommended. LED IP20 CE UK ENEC  103 x 3,5 cm
--	--

3518
TRIMLESS
UGR <21

Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R)	Static White /1 _ 2700 K - 6696 lm /2 _ 3000 K - 6932 lm /3 _ 3500 K - 7164 lm E EPREL Tunable White /8 _ (2200 K - 4000 K) 4884 lm - 5372 lm F EPREL CRI >90	3518 _ _ / _ _ _ _ / _ O Static White + On/ Off _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ M Static White + Without driver _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi

Materials Body: Aluminum / PC- Polycarbonate. Shade: PC- Polycarbonate & Bronze. Diffuser: PE- Polyethylene. Trimless frame: Aluminum.	Packaging 2 Boxes Total Vol 0,018 m³ Gross weight 3,35 kg Net weight 2,46 Kg
Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 54,8 W 650 mA Constant Current 650 mA 220~240V 50/60Hz Tunable White: 1 x LED STRIP 54,7 W Constant Voltage 24VDC 220~240V 50/60Hz	Notes Trimless frame can be shipped in advance under request. For Tunable White versions, a grouping driver is recommended.
	LED IP20 CE UK ENEC 104 x 4 cm



Ceiling - Flat Diffuser



3530 Trim
53 x 4 cm



3533 Trimless
51 x 3 cm



3535 Trim
103 x 4 cm



3538 Trimless
102 x 3 cm




3540 Trim
203 x 4 cm




3543 Trimless
202 x 3 cm

TRIM



TRIMLESS



3530

TRIM

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 23/  Warm White (NCS S 0502-Y50R)	Static White /1 _ 2700 K - 1272 lm /2 _ 3000 K - 1314 lm /3 _ 3500 K - 1356 lm Tunable White /8 _ (2200 K - 4000 K) 875 lm - 1197 lm  CRI >90	3530 _ _ / _ _ _ _ / 0 Static White + On/ Off _ _ / A Static White + Push; 1-10V; DALI-2 _ _ / M Static White + Without driver _ _ / Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi

Materials
 Body: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 24V 10,3 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Tunable White:
 1 x LED STRIP 10,3 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,570 m
 Vol 0,005 m³
 Gross weight 1,25 Kg Net weight 0,78 Kg

Notes

3530 **_** **_** **/** **A**: Static White + Push; 1-10V; DALI-2 **Multi-volt**
 For Tunable White versions, a grouping driver
 is recommended.

Visit vibia.com to group several pieces with
 just one electrical point.

       52 x 3,5 cm

3533

TRIMLESS

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 23/  Warm White (NCS S 0502-Y50R)	Static White /1 _ 2700 K - 1272 lm /2 _ 3000 K - 1314 lm /3 _ 3500 K - 1356 lm Tunable White /8 _ (2200 K - 4000 K) 875 lm - 1197 lm  CRI >90	3533 _ _ / _ _ _ _ / 0 Static White + On/ Off _ _ / A Static White + Push; 1-10V; DALI-2 _ _ / M Static White + Without driver _ _ / Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi

Materials
 Body: Aluminum.
 Diffuser: PC- Polycarbonate.
 Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 24V 10,3 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Tunable White:
 1 x LED STRIP 10,3 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,010 m³
 Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

3533 **_** **_** **/** **0**: Static White + On/ Off **Multi-volt**
 3533 **_** **_** **/** **A**: Static White + Push; 1-10V; DALI-2 **Multi-volt**
 For Tunable White versions, a grouping driver
 is recommended.

Visit vibia.com to group several pieces with
 just one electrical point.

       53 x 4 cm

3535
TRIM

Finishes 11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R)	LED Colour Temperature Static White /1 _ 2700 K - 2544 lm /2 _ 3000 K - 2628 lm /3 _ 3500 K - 2712 lm Tunable White /8 _ (2200 K - 4000 K) 1751 lm - 2395 lm E CRI >90	Control 3535 _ _ / _ _ _ _ / _ O Static White + On/ Off _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ M Static White + Without driver _ _ / _ Z Static White + Casambi	
		_ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi	
Materials Body: Aluminum. Diffuser: PC - Polycarbonate. Frame: Aluminum. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 24V 20,6 W Constant Voltage 24VDC 220-240V 50/60Hz Tunable White: 1 x LED STRIP 20,6 W Constant Voltage 24VDC 220-240V 50/60Hz			
Packaging 1 Box 0,105 x 0,08 x 1,095 m Vol 0,009 m³ Gross weight 3,25 Kg Net weight 2,36 Kg Notes 3535 _ _ / _ A: Static White + Push; 1-10V; DALI-2 Multi-volt For Tunable White versions, a grouping driver is recommended. LED IP20 CE UK EAC 102 x 3,5 cm			

3538
TRIMLESS

Finishes 11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R)	LED Colour Temperature Static White /1 _ 2700 K - 2544 lm /2 _ 3000 K - 2628 lm /3 _ 3500 K - 2712 lm Tunable White /8 _ (2200 K - 4000 K) 1751 lm - 2395 lm E CRI >90	Control 3538 _ _ / _ _ _ _ / _ O Static White + On/ Off _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ M Static White + Without driver _ _ / _ Z Static White + Casambi	
		_ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi	
Materials Body: Aluminum. Diffuser: PC - Polycarbonate. Trimless frame: Aluminum. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 24V 20,6 W Constant Voltage 24VDC 220-240V 50/60Hz Tunable White: 1 x LED STRIP 20,6 W Constant Voltage 24VDC 220-240V 50/60Hz			
Packaging 2 Boxes Vol 0,018 m³ Gross weight 3,35 Kg Net weight 2,46 Kg Notes 3538 _ _ / _ A: Static White + Push; 1-10V; DALI-2 Multi-volt Trimless frame can be shipped in advance under request. For Tunable White versions, a grouping driver is recommended. LED IP20 CE UK EAC 103 x 4 cm			

3540

TRIM

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 23/  Warm White (NCS S 0502-Y50R)	Static White /1 2700 K - 5088 lm /2 3000 K - 5256 lm /3 3500 K - 5424 lm Tunable White /8 (2200 K - 4000 K) 3503 lm - 4791 lm  CRI >90	3540 __ / __ __ / 0 Static White + On/ Off __ / A Static White + Push; 1-10V; DALI-2 __ / M Static White + Without driver __ / Z Static White + Casambi __ / 81 Tunable White + DALI-2 DT8 __ / 8M Tunable White + Without driver __ / 8Z Tunable White + Casambi
Materials	Packaging	Notes
Body: Aluminum. Diffuser: PC - Polycarbonate. Frame: Aluminum. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 24V 41,2 W Constant Voltage 24VDC 220~240V 50/60Hz Tunable White: 1 x LED STRIP 41,3 W Constant Voltage 24VDC 220~240V 50/60Hz	1 Box 0,125 x 0,125 x 2,25 m Vol 0,035 m ³ Gross weight 7,25 Kg Net weight 5,16 Kg	3540 __ / __ A: Static White + Push; 1-10V; DALI-2 Multi-volt For Tunable White versions, a grouping driver is recommended.        202 x 3,5 cm

3543

TRIMLESS

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 23/  Warm White (NCS S 0502-Y50R)	Static White /1 2700 K - 5088 lm /2 3000 K - 5256 lm /3 3500 K - 5424 lm Tunable White /8 (2200 K - 4000 K) 3503 lm - 4791 lm  CRI >90	3543 __ / __ __ / 0 Static White + On/ Off __ / A Static White + Push; 1-10V; DALI-2 __ / M Static White + Without driver __ / Z Static White + Casambi __ / 81 Tunable White + DALI-2 DT8 __ / 8M Tunable White + Without driver __ / 8Z Tunable White + Casambi
Materials	Packaging	Notes
Body: Aluminum. Diffuser: PC - Polycarbonate. Trimless frame: Aluminum. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 24V 41,2 W Constant Voltage 24VDC 220~240V 50/60Hz Tunable White: 1 x LED STRIP 41,3 W Constant Voltage 24VDC 220~240V 50/60Hz	2 Boxes Total Vol 0,07 m ³ Gross weight 7,85 Kg Net weight 5,66 Kg	3543 __ / __ A: Static White + Push; 1-10V; DALI-2 Multi-volt Trimless frame can be shipped in advance under request. For Tunable White versions, a grouping driver is recommended.        203 x 4 cm

Ceiling - High Efficiency Low Glare



3550 Trim
14 x 4 cm



3553 Trimless
13 x 3 cm



3555 Trim
27 x 4 cm



3558 Trimless
26 x 3 cm



3560 Trim
53 x 4 cm



3563 Trimless
51 x 3 cm




3565 Trim
104 x 4 cm




3568 Trimless
102 x 3 cm

TRIM



TRIMLESS



3550
TRIM
UGR <18

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 23/  Warm White (NCS S 0502-Y50R)	Static White /1  2700 K - 897 lm /2  3000 K - 928 lm /3  3500 K - 960 lm Tunable White /8  (2200 K - 4000 K) 664 lm - 898 lm  CRI >90	3550  /  __ __ / __ O Static White + On/ Off __ / __ D Static White + Push, DALI-2 __ / __ M Static White + Without driver __ / __ Z Static White + Casambi __ / 81 Tunable White + DALI-2 DT8 __ / 8M Tunable White + Without driver __ / 8Z Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 7,4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 7,2 W
Constant Voltage 24VDC
220~240V 50/60Hz


Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,003 m³
Gross weight 0,5 Kg Net weight 0,35 Kg

Notes

For Tunable White versions,
a grouping driver is recommended.
Visit vibia.com to group several pieces with just
one electrical point.


     
 13,5 x 3,5 cm

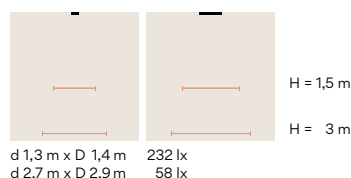

3553
TRIMLESS
UGR <18

Finishes		LED Colour Temperature	Control
	11/ _ _ Black (NCS S 8500-N)	Static White /1 _ 2700 K - 897 lm /2 _ 3000 K - 928 lm /3 _ 3500 K - 960 lm	3553 _ _ / _ _
	23/ _ _ Warm White (NCS S 0502-Y50R)	Tunable White /8 _ (2200 K - 4000 K) 664 lm - 898 lm	_ _ / _ O Static White + On/ Off
			_ _ / _ D Static White + Push, DALI-2
			_ _ / _ M Static White + Without driver
			_ _ / _ Z Static White + Casambi
			_ _ / 81 Tunable White + DALI-2 DT8
			_ _ / 8M Tunable White + Without driver
			_ _ / 8Z Tunable White + Casambi

Materials Body: Aluminum & PC-Polycarbonate. Shade: PC - Polycarbonate. Trimless frame: Aluminum.	Packaging 2 Boxes Total Vol 0,006 m³ Gross weight 0,825 Kg Net weight 0,525 Kg
Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED STRIP 7,4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz Tunable White: 1 x LED STRIP 7,2 W Constant Voltage 24VDC 220~240V 50/60Hz	Notes Trimless frame can be shipped in advance under request. For Tunable White versions, remote driver only required. For tunable White versions, a grouping driver is recommended. Visit vibia.com to group several pieces with just one electrical point.
LED  IP20   ENEC   14,5 x 4 cm	



3555
TRIM
UGR <18

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N) 23/  Warm White (NCS S 0502-Y50R)	Static White /1 2700 K - 1674 lm /2 3000 K - 1733 lm /3 3500 K - 1791 lm Tunable White /8 (2200 K - 4000 K) 1262 lm - 1707 lm  CRI >90	3555 __ / __ __ / 0 Static White + On/ Off __ / D Static White + Push, DALI-2 __ / M Static White + Without driver __ / Z Static White + Casambi __ / 81 Tunable White + DALI-2 DT8 __ / 8M Tunable White + Without driver __ / 8Z Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:

1 x LED STRIP 13,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,003 m³
Gross weight 0,55 Kg Net weight 0,45 Kg



Notes

For Tunable White versions, a grouping driver is recommended.

Visit vibia.com to group several pieces with just one electrical point.

 26,2 x 3,5 cm

		H = 1,5 m
d 1,4 m x D 1,5 m	418 lx	
d 2,8 m x D 3 m	104 lx	H = 3 m

3558
TRIMLESS
UGR <18

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm
Tunable White
/8 _ (2200 K - 4000 K)
1262 lm - 1707 lm
E
CRI >90

Control

- 3558 _ _ / _ _
- _ _ / _ O Static White +
On/ Off
 - _ _ / _ D Static White +
Push, DALI-2
 - _ _ / _ M Static White +
Without driver
 - _ _ / _ Z Static White +
Casambi
-
- _ _ / 81 Tunable White +
DALI-2 DT8
 - _ _ / 8M Tunable White +
Without driver
 - _ _ / 8Z Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz
Tunable White:
1 x LED STRIP 13,7 W
Constant Voltage 24VDC
220~240V 50/60Hz


Packaging

2 Boxes
Total Vol 0,006 m³
Gross weight 1,05 Kg Net weight 0,75 Kg

Notes

Trimless frame can be shipped in advance
under request.
For tunable White versions, a grouping
driver is recommended.
Visit vibia.com to group several pieces with
just one electrical point.

LED IP20 CE UK ENEC
27 x 4 cm



3560
TRIM
UGR <18

Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R)	Static White /1 _ 2700 K - 3348 lm /2 _ 3000 K - 3466 lm /3 _ 3500 K - 3582 lm Tunable White /8 _ (2200 K - 4000 K) 2524 lm - 3414 lm  CRI >90	3560 _ _ / _ _ _ _ / _ O Static White + On/ Off _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ M Static White + Without driver _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 27,4 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,005 m³
Gross weight 1,25 Kg Net weight 0,78 Kg


Notes

For Tunable White versions, a grouping driver is recommended.

Visit vibia.com to group several pieces with just one electrical point.

 52 x 3,5 cm

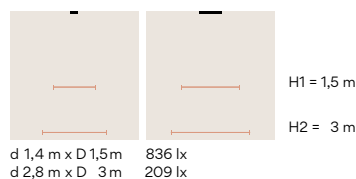

3563
TRIMLESS
UGR <18

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm

Tunable White
/8 _ (2200 K - 4000 K)
2524 lm - 3414 lm

E 
CRI >90

Control

- 3563 _ _ / _ _
-
- _ _ / _ **O** Static White +
On/ Off
 - _ _ / _ **A** Static White +
Push; 1-10V; DALI-2
 - _ _ / _ **M** Static White +
Without driver
 - _ _ / _ **Z** Static White +
Casambi
-
- _ _ / **81** Tunable White +
DALI-2 DT8
 - _ _ / **8M** Tunable White +
Without driver
 - _ _ / **8Z** Tunable White +
Casambi
-

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz
Tunable White:
1 x LED STRIP 27,4 W
Constant Voltage 24VDC
220~240V 50/60Hz


Packaging

2 Boxes
Total Vol 0,010 m³
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

Trimless frame can be shipped in advance
under request.
For Tunable White versions, a grouping driver
is recommended.
Visit vibia.com to group several pieces with just
one electrical point.

LED  IP20   ENEC 
 53 x 4 cm



3565
TRIM
UGR <18

Finishes	LED Colour Temperature	Control
11/  _ _ Black (NCS S 8500-N) 23/  _ _ Warm White (NCS S 0502-Y50R)	Static White /1 _ 2700 K - 6696 lm /2 _ 3000 K - 6932 lm /3 _ 3500 K - 7164 lm Tunable White /8 _ (2200 K - 4000 K) 5048 lm - 6828 lm  CRI >90	3565 _ _ / _ _ _ _ / _ 0 Static White + On/ Off _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ M Static White + Without driver _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 54,8 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:

1 x LED STRIP 54,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009 m³
Gross weight 3,25 Kg Net weight 2,36 Kg

Notes

For Tunable White versions, a grouping driver is recommended.

 102 x 3,5 cm

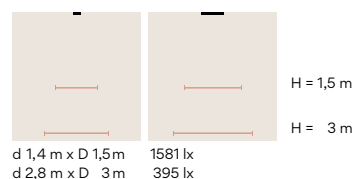

3568
 TRIMLESS
 UGR <18

Finishes

- **11/ _ _ Black**
 (NCS S 8500-N)
- **23/ _ _ Warm White**
 (NCS S 0502-Y50R)

LED Colour Temperature

Static White
 /1_ 2700 K - 6696 lm
 /2_ 3000 K - 6932 lm
 /3_ 3500 K - 7164 lm

Tunable White
 /8_ (2200 K - 4000 K)
 5048 lm - 6828 lm



CRI >90

Control

3568 _ _ / _ _

- _ _ / _ **O** Static White +
On/ Off
- _ _ / _ **A** Static White +
Push; 1-10V; DALI-2
- _ _ / _ **M** Static White +
Without driver
- _ _ / _ **Z** Static White +
Casambi
- _ _ / **81** Tunable White +
DALI-2 DT8
- _ _ / **8M** Tunable White +
Without driver
- _ _ / **8Z** Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
 Shade: PC - Polycarbonate.
 Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
 1 x LED STRIP 54,8 W 650 mA
 Constant Current 650 mA
 220~240V 50/60Hz

Tunable White:
 1 x LED STRIP 54,7 W
 Constant Voltage 24VDC
 220~240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 1,095 m
 Vol 0,018 m³
 Gross weight 3,35 Kg Net weight 2,46 Kg

Notes

Trimless frame can be shipped in advance
 under request.
 For Tunable White versions, a grouping driver
 is recommended.

LED IP20 CE UK ENEC

104 x 4 cm

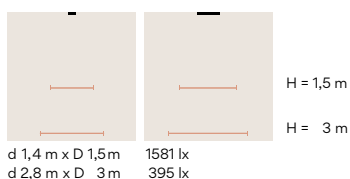

d 1,4 m x D 1,5 m 1581 lx
 d 2,8 m x D 3 m 395 lx



Ceiling - Wall Washer



3575 Trim
27 x 4 cm

3578 Trimless
26 x 3 cm



3580 Trim
53 x 4 cm

3583 Trimless
51 x 3 cm



3585 Trim
104 x 4 cm


3588 Trimless
102 x 3 cm



TRIM



TRIMLESS



3575

TRIM

Finishes	LED Colour Temperature	Control
11/ ☐ Black (NCS S 8500-N)	Static White /1 ☐ 2700 K - 1392 lm /2 ☐ 3000 K - 1430 lm /3 ☐ 3500 K - 1455 lm	3575 ☐ ☐ ☐
23/ ☐ Warm White (NCS S 0502-Y50R)	Tunable White /8 ☐ (2200 K - 4000 K) 764 lm - 849 lm F	0 Static White + On/ Off D Static White + Push, DALI-2 M Static White + Without driver Z Static White + Casambi
		81 Tunable White + DALI-2 DT8 8M Tunable White + Without driver 8Z Tunable White + Casambi

Materials

Frame: PC- Polycarbonate.
Body: Aluminum & PC-Polycarbonate.
Lens: PMMA. Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,3 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:

1 x LED STRIP 11,5 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,015 m³
Gross weight 0,55 Kg Net weight 0,45 Kg


Notes

For Tunable White versions, a grouping driver is recommended.

Visit vibia.com to group several pieces with just one electrical point.

LED ☐ IP20 ☐ CE ☐ ENEC ☐

26,2 x 3,5 cm

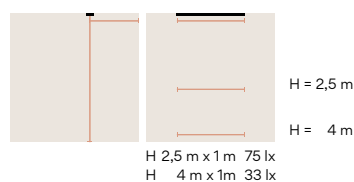

3578
TRIMLESS

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 1392 lm
 - /2 _ 3000 K - 1430 lm
 - /3 _ 3500 K - 1455 lm

- Tunable White**
- /8 _ (2200 K - 4000 K)
764 lm - 849 lm



CRI >90

Control

3578 _ _ / _ _

- _ _ / _ **O** Static White +
On/ Off
- _ _ / _ **D** Static White +
Push, DALI-2
- _ _ / _ **M** Static White +
Without driver
- _ _ / _ **Z** Static White +
Casambi

- _ _ / **81** Tunable White +
DALI-2 DT8
- _ _ / **8M** Tunable White +
Without driver
- _ _ / **8Z** Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate. Lens: PMMA.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,3 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 11,5 W
Constant Voltage 24VDC
220~240V 50/60Hz


Packaging

2 Boxes
Total Vol 0,03 m³
Gross weight 1,1 Kg Net weight 0,75 Kg

Notes

Trimless frame can be shipped in advance
under request.
For tunable White versions, a grouping driver
is recommended.
Visit vibia.com to group several pieces with
just one electrical point.

LED IP20 CE UK ENEC
27 x 4 cm



3580

TRIM

Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R)	Static White /1 _ 2700 K - 2784 lm /2 _ 3000 K - 2860 lm /3 _ 3500 K - 2911 lm Tunable White /8 _ (2200 K - 4000 K) 1528 lm - 1698 lm  CRI >90	3580 _ _ / _ _ _ _ / _ 0 Static White + On/ Off _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ M Static White + Without driver _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi

Materials

Frame: PC- Polycarbonate.
Body: Aluminum & PC-Polycarbonate.
Lens: PMMA. Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 26,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 23 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 0,57 m
Vol 0,005 m³
Gross weight 1,25 Kg Net weight 0,78 Kg

Notes

For Tunable White versions, a grouping driver is recommended.
Visit vibia.com to group several pieces with just one electrical point.

LED  IP20    

 52 x 3,5 cm

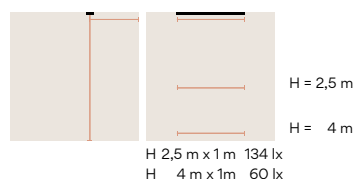

3583
TRIMLESS

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

- Static White**
/1 _ 2700 K - 2784 lm
/2 _ 3000 K - 2860 lm
/3 _ 3500 K - 2911 lm
- Tunable White**
/8 _ (2200 K - 4000 K)
1528 lm - 1698 lm
-  CRI >90

Control

- 3583 _ _ / _ _
-
- _ _ / _ **O** Static White +
On/ Off
- _ _ / _ **A** Static White +
Push; 1-10V; DALI-2
- _ _ / _ **M** Static White +
Without driver
- _ _ / _ **Z** Static White +
Casambi
-
- _ _ / **81** Tunable White +
DALI-2 DT8
- _ _ / **8M** Tunable White +
Without driver
- _ _ / **8Z** Tunable White +
Casambi
-

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate. Lens: PMMA.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 26,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 23 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,01 m³
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

Trimless frame can be shipped in advance
under request.
For Tunable White versions, a grouping driver
is recommended.
Visit vibia.com to group several pieces with just
one electrical point.

 53 x 4 cm



3585

TRIM

Finishes	LED Colour Temperature	Control
11/  Black (NCS S 8500-N)	Static White /1_ 2700 K - 5568 lm /2_ 3000 K - 5721 lm /3_ 3500 K - 5822 lm Tunable White /8_ (2200 K - 4000 K) 3056 lm - 3396 lm 	3585 _ _ / _ _
23/  Warm White (NCS S 0502-Y50R)	CRI >90	_ _ / 0 Static White + On/ Off _ _ / A Static White + Push; 1-10V; DALI-2 _ _ / M Static White + Without driver _ _ / Z Static White + Casambi
		_ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Lens: PMMA.
Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 53,2 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 46 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging


1 Box 0,125 x 0,125 x 1,9 m
Vol 0,017 m³
Gross weight 3,25 Kg Net weight 2,3 Kg

Notes

For Tunable White versions, a grouping driver is recommended.

 103 x 3,5 cm

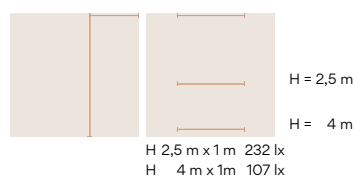

3588
TRIMLESS

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1_ 2700 K - 5568 lm
/2_ 3000 K - 5721 lm
/3_ 3500 K - 5822 lm

Tunable White
/8_ (2200 K - 4000 K)
3056 lm - 3396 lm


CRI >90

Control

3588 _ _ / _ _

- _ _ / _

O Static White +
On/ Off
- _ _ / _

A Static White +
Push; 1-10V; DALI-2
- _ _ / _

M Static White +
Without driver
- _ _ / _

Z Static White +
Casambi
- _ _ /

81 Tunable White +
DALI-2 DT8
- _ _ /

8M Tunable White +
Without driver
- _ _ /

8Z Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate. Lens: PMMA.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 53,2 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 46 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,017 m³
Gross weight 4,5 Kg Net weight 3,06 Kg

Notes

For Tunable White versions, a grouping driver
is recommended.

 104 x 4 cm





Ceiling - Colour Mood Grazer



3605 Trim
103 x 4 cm



3608 Trimless
100 x 3 cm




3610 Trim
203 x 4 cm




3613 Trimless
202 x 3 cm

TRIM



TRIMLESS



3605

TRIM

Finishes 11/ __ Black (NCS S 8500-N) 23/ __ Warm White (NCS S 0502-Y50R)	LED Colour Temperature Infinite Colour (TW+ RGB) /A_ 1575 lm - 1861 lm 70 lm 11 (RED) 182 lm (GREEN) 35 lm (BLUE) G CRI >90	Control 3605 __ / AY ProtoPixel*
Materials Frame: Aluminum. Body: Aluminum. Shade: Aluminum. Diffuser: PC - Polycarbonate. Light Source and electronics 1 x LED STRIP 24V 28 W Constant Voltage 24VDC 220-240V 50/60Hz	Packaging 1 Box 0,105 x 0,08 x 1,09 m Vol 0,009 m³ Gross weight 3,17 Kg Net weight 2,4 Kg Notes ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us). LED IP20 CE UK EMC 102 x 3.5 cm	

3608

TRIMLESS

Finishes  11/ __ Black (NCS S 8500-N)  23/ __ Warm White (NCS S 0502-Y50R)	LED Colour Temperature Infinite Colour (TW+ RGB) /A_ 1575 lm - 1861 lm 70 lm 11 (RED) 182 lm (GREEN) 35 lm (BLUE)  CRI >90	Control 3608 __ / AY ProtoPixel*
Materials Trimless frame: Aluminum. Body: Aluminum. Shade: Aluminum. Diffuser: PC - Polycarbonate. Light Source and electronics 1 x LED STRIP 24V 28 W Constant Voltage 24VDC 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,02 m³ Gross weight 3,17 Kg Net weight 2,4 Kg Notes ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us). Trimless frame can be shipped in advance under request.	
       103 x 4 cm		

3610
TRIM

Finishes 11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R)	LED Colour Temperature Infinite Colour (TW+ RGB) /A _ 3150 lm - 3722 lm 140 lm 11 (RED) 364 lm (GREEN) 70 lm (BLUE) G CRI >90	Control 3610 _ _ / AY ProtoPixel*
Materials Frame: Aluminum. Body: Aluminum. Shade: Aluminum. Diffuser: PC - Polycarbonate. Light Source and electronics 1 x LED STRIP 56 W 24 V Constant Voltage 24VDC 220~240V 50/60Hz	Packaging 1 Box 0,125 x 0,125 x 2,09 m Vol 0,047 m³ Gross weight 5,25 Kg Net weight 4,6 Kg Notes ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us). LED IP20 CE UK ErC 202 x 3,5 cm	

3613
TRIMLESS

Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R)	LED Colour Temperature Infinite Colour (TW+ RGB) /A _ 3150 lm - 3722 lm 140 lm 11 (RED) 364 lm (GREEN) 70 lm (BLUE) G CRI >90	Control 3613 _ _ / AY ProtoPixel*
Materials Trimless frame: Aluminum. Body: Aluminum. Shade: Aluminum. Diffuser: PC - Polycarbonate. Light Source and electronics 1x LED STRIP 24V 56 W Constant Voltage 24VDC 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,093 m³ Gross weight 5,25 Kg Net weight 4,6 Kg Notes ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us). Trimless frame can be shipped in advance under request. LED IP20 CE UK ErC 203 x 4 cm	



Palma

Design by Antoni Arola

The interior ambience takes on a life of its own with the possibility of integrating plants with the lighting compositions. Palma connects light and vegetation as in the natural landscape.

Wall



3700

Finishes
● 18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F
CRI >90

Control
3700 18 / 1B Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220-240V 50/60Hz

Packaging
1 Box 0,57 x 0,31 x 0,21 m
Vol 0,0382 m³
Gross weight 3 Kg Net weight 1,8 Kg

LED IP20 CE UK ENEC

3702

Finishes
● **18/** _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F 
CRI >90

Control
3702 _ _ / _ _
_ _ / **11** DALI-2
_ _ / **1B** Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.
Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,87 x 0,31 x 0,21 m
Vol 0,0581 m³
Gross weight 4,05 Kg Net weight 2,4 Kg
LED  **IP20** **CE** **UK** **EMC** 

3704

Finishes
● **18/** _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 1736 lm
F 
CRI >90

Control
3704 _ _ / _ _
_ _ / **11** DALI-2
_ _ / **1B** Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.
Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0081 m³
Gross weight 6,2 Kg Net weight 3,9 Kg
LED  **IP20** **CE** **UK** **EMC** 

3706

Finishes
● **18/** _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 2604 lm
F 
CRI >90

Control
3706 _ _ / _ _
_ _ / **11** DALI-2
_ _ / **1B** Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.
Light Source and electronics
6 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1793 m³
Gross weight 6,4 Kg Net weight 3,9 Kg
LED  **IP20** **CE** **UK** **EMC** 

3710

Finishes
● **18/** _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F 
CRI >90

Control
3710 / **1B** Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,57 x 0,31 x 0,21 m
Vol 0,0382 m³
Gross weight 2,6 Kg Net weight 1,8 Kg
LED  **IP20** **CE** **UK** **EMC** 

3714	Finishes 18/ _ _ Graphite (ADAPTA RF 9913 WX)	LED Colour Temperature /1 _ 2700 K - 868 lm F CRI >90	Control 3714 _ _ / _ _ _ _ / 11 DALI-2 _ _ / 1B Push; 1-10V
	Materials Diffuser: Blown-glass. Profile: Aluminum. Planter: PMMA. Light Source and electronics 2 x LED 4,6 W 500 mA Constant Current 500 mA 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,0081 m³ Gross weight 5,2 Kg Net weight 2,9 Kg LED IP20 CE UK EAC	
3716	Finishes 18/ _ _ Graphite (ADAPTA RF 9913 WX)	LED Colour Temperature /1 _ 2700 K - 1736 lm F CRI >90	Control 3716 _ _ / _ _ _ _ / 11 DALI-2 _ _ / 1B Push; 1-10V
	Materials Diffuser: Blown-glass. Profile: Aluminum. Light Source and electronics 4 x LED 4,6 W 500 mA Constant Current 500 mA 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,0081 m³ Gross weight 6,5 Kg Net weight 4,2 Kg LED IP20 CE UK EAC	
3718	Finishes 18/ _ _ Graphite (ADAPTA RF 9913 WX)	LED Colour Temperature /1 _ 2700 K - 2604 lm F CRI >90	Control 3718 _ _ / _ _ _ _ / 11 DALI-2 _ _ / 1B Push; 1-10V
	Materials Diffuser: Blown-glass. Profile: Aluminum. Planter: PMMA. Light Source and electronics 6 x LED 4,6 W 500 mA Constant Current 500 mA 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,1793 m³ Gross weight 8,6 Kg Net weight 6,1 Kg LED IP20 CE UK EAC	

Pendant



3720

Finishes
 ● 18/ _ _ Graphite
 (ADAPTA RF 9913 WX)

LED Colour Temperature
 /1_ 2700 K - 868 lm
 F
 CRI >90

Control

3720 _ _ / _ _
 _ _ / 11 DALI-2
 _ _ / 1B Push; 1-10V
 _ _ / 1Z Casambi

Materials

Diffuser: Blown-glass.
 Profile: Aluminum.

Light Source and electronics

2 x LED 4,6 W 500 mA
 Constant Current 500 mA
 110~240V 50/60Hz

Packaging

1 Box 0,71 x 0,27 x 0,21 m
 Vol 0,0413 m³
 Gross weight 3,75 Kg Net weight 2,8 Kg

Notes

3720 _ _ / 11: DALI-2 Bi-volt
 3720 _ _ / 1B: Push; 1-10V Bi-volt
 Extra cable length.

LED IP20 CE UK ENEC

3724	Finishes 18/ __ Graphite (ADAPTA RF 9913 WX)	LED Colour Temperature /1_ 2700 K - 868 lm F CRI >90	Control 3724 __ / __ __ / 11 DALI-2 __ / 1B Push; 1-10V __ / 1Z Casambi
	Materials Diffuser: Blown-glass. Profile: Aluminum. Planter: PMMA. Light Source and electronics 2 x LED 4,6 W 500 mA Constant Current 500 mA 110~240V 50/60Hz	Packaging 1 Box 1,02 x 0,27 x 0,21 m Vol 0,0588 m³ Gross weight 4,6 Kg Net weight 3,3 Kg Notes 3724 __ / 11: DALI-2 Bi-volt 3724 __ / 1B: Push; 1-10V Bi-volt Extra cable length. LED  IP20    	
3726	Finishes 18/ __ Graphite (ADAPTA RF 9913 WX)	LED Colour Temperature /1_ 2700 K - 1736 lm F CRI >90	Control 3726 __ / __ __ / 11 DALI-2 __ / 1B Push; 1-10V __ / 1Z Casambi
	Materials Diffuser: Blown-glass. Profile: Aluminum. Light Source and electronics 4 x LED 4,6 W 500 mA Constant Current 500 mA 220~240V 50/60Hz	Packaging 1 Box 1,02 x 0,27 x 0,21 m Vol 0,0588 m³ Gross weight 5,4 Kg Net weight 4,1 Kg Notes Extra cable length. LED  IP20    	
3728	Finishes 18/ __ Graphite (ADAPTA RF 9913 WX)	LED Colour Temperature /1_ 2700 K - 1736 lm F CRI >90	Control 3728 __ / __ __ / 11 DALI-2 __ / 1B Push; 1-10V __ / 1Z Casambi
	Materials Diffuser: Blown-glass. Profile: Aluminum. Planter: PMMA. Light Source and electronics 4 x LED 4,6 W 500 mA Constant Current 500 mA 110~240V 50/60Hz	Packaging 1 Box 0,75 x 0,53 x 0,21 m Vol 0,0857 m³ Gross weight 8,8 Kg Net weight 4,7 Kg Notes Extra cable length. LED  IP20    	

3730	Finishes 18/ _ _ Graphite (ADAPTA RF 9913 WX)	LED Colour Temperature /1 _ 2700 K - 2604 lm F CRI >90	Control 3730 _ _ / _ _ _ _ / 1A Push; 1-10V; DALI-2 _ _ / 1Z Casambi
	Materials Diffuser: Blown-glass. Profile: Aluminum. Light Source and electronics 6 x LED 4,6 W 500 mA Constant Current 500 mA 110~240V 50/60Hz	Packaging 1 Box 0,75 x 0,53 x 0,21 m Vol 0,0857 m³ Gross weight 9,5 Kg Net weight 5,4 Kg Notes Extra cable length. LED IP20	
3734	Finishes 18/ _ _ Graphite (ADAPTA RF 9913 WX)	LED Colour Temperature /1 _ 2700 K - 2265 lm F CRI >90	Control 3734 _ _ / _ _ _ _ / 1A Push; 1-10V; DALI-2 _ _ / 1Z Casambi
	Materials Diffuser: Blown-glass. Profile: Aluminum. Planter: PMMA. Light Source and electronics 1 x LED 2 W 500 mA 4 x LED 4,6 W 500 mA Constant Current 500 mA 110~240V 50/60Hz	Packaging 1 Box 1,72 x 0,33 x 0,31 m Vol 0,1790 m³ Gross weight 9,4 Kg Net weight 5,95 Kg Notes 3724 _ _ / 1A: Push; 1-10V; DALI-2 Bi-volt Extra cable length. LED IP20	
3735	Finishes 18/ _ _ Graphite (ADAPTA RF 9913 WX)	LED Colour Temperature /1 _ 2700 K - 2265 lm F CRI >90	Control 3735 _ _ / _ _ _ _ / 1A Push; 1-10V; DALI-2 _ _ / 1Z Casambi
	Materials Diffuser: Blown-glass. Profile: Aluminum. Light Source and electronics 6 x LED 4,6 W 500 mA Constant Current 500 mA 110~240V 50/60Hz	Packaging 1 Box 1,72 x 0,33 x 0,31 m Vol 0,1790 m³ Gross weight 9,4 Kg Net weight 5,95 Kg Notes Extra cable length. LED IP20	
3736	Finishes 18/ _ _ Graphite (ADAPTA RF 9913 WX)	LED Colour Temperature /1 _ 2700 K - 3133 lm F CRI >90	Control 3736 _ _ / _ _ _ _ / 1A Push; 1-10V; DALI-2 _ _ / 1Z Casambi
	Materials Diffuser: Blown-glass. Profile: Aluminum. Planter: PMMA. Light Source and electronics 1 x LED 2 W 500 mA 6 x LED 4,6 W 500 mA Constant Current 500 mA 110~240V 50/60Hz	Packaging 1 Box 2,17 x 0,33 x 0,31 m Vol 0,2219 m³ Gross weight 12,29 Kg Net weight 8,16 Kg Notes Extra cable length. LED IP20 Dimmer	

Ceiling



3760	Finishes 18/ _ _ Graphite (ADAPTA RF 9913 WX)	LED Colour Temperature /1 _ 2700 K - 1736 lm F CRI >90	Control 3760 _ _ / _ _ _ _ / 11 DALI-2 _ _ / 1B Push; 1-10V _ _ / 1Z Casambi
	Materials Diffuser: Blown-glass. Profile: Aluminum. Light Source and electronics 4 x LED 4,6 W 500 mA Constant Current 500 mA 100~240Vac 50/60Hz	Packaging 1 Box 0,81 x 0,33 x 0,31 m Vol 0,0083 m³ Gross weight 6,2 Kg Net weight 3,9 Kg LED  IP20    	

3764	Finishes 18/ _ _ Graphite (ADAPTA RF 9913 WX)	LED Colour Temperature /1 _ 2700 K - 3472 lm F CRI >90	Control 3764 _ _ / _ _ _ _ / 1A Push; 1-10V; DALI-2 _ _ / 1Z Casambi
	Materials Diffuser: Blown-glass. Profile: Aluminum. Light Source and electronics 8 x LED 4,6 W 500 mA Constant Current 500 mA 100~240Vac 50/60Hz	Packaging 1 Box 0,81 x 0,33 x 0,31 m Vol 0,0083 m³ Gross weight 9,5 Kg Net weight 5,4 Kg LED  IP20    	



Bigger

Design by La Invisible

Bigger serves as statement lighting without overbearing the space it occupies, radiating with profuse light which cascades down from the ceiling, its impressive scale bringing the space to life.

Ceiling

3900

Ø 80 cm



3905

Ø 84 cm



3910

Ø 103 cm



3915

Ø 107 cm



3900

Finishes

- 23/ _ _ Beige L1
(NCS S 0502-Y50R)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)
- 53/ _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 6547,3 lm
D
/3 _ 3500 K - 7359,4 lm
C
Tunable White
/8 _ (2200 K - 4000 K)
5748,1 lm - 7351,4 lm
C
CRI >90

Control

3900 _ _ / _ _

- _ _ / _ A Static White +
Push; 1-10V; DALI-2
- _ _ / _ Z Static White +
Casambi
- _ _ / 81 Tunable White +
DALI-2 DT8
- _ _ / 8Z Tunable White +
Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz
Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,487 m³
Gross weight 11,65 Kg Net weight 9,65 Kg

Notes

3900 _ _ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

LED IP20 CE ENEC ENEC Dimmer

3905

- Finishes**
- 23/ _ _ Beige L1
(NCS S 0502-Y50R)
 - 24/ _ _ Beige M1
(NCS S 2005-Y50R)
 - 37/ _ _ Terra Red
(NCS S 4040-Y70R)
 - 53/ _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1_ 2700 K - 6547,3 lm
D

/3_ 3500 K - 7359,4 lm
C

Tunable White
/8_ (2200 K - 4000 K)
5748,1 lm - 7351,4 lm
C

CRI >90

Control

3905 _ _ / _ _

_ _ / _ A Static White +
Push; 1-10V; DALI-2

_ _ / _ Z Static White +
Casambi

_ _ / 81 Tunable White +
DALI-2 DT8

_ _ / 8Z Tunable White +
Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110-240V 50/60Hz

Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120-250V 50/60Hz

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,487 m³
Gross weight 12,7 Kg Net weight 10,75 Kg

Notes

3905 _ _ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

LED IP20 CE UK ENE Dimmer

3910

- Finishes**
- 23/ _ _ Beige L1
(NCS S 0502-Y50R)
 - 24/ _ _ Beige M1
(NCS S 2005-Y50R)
 - 37/ _ _ Terra Red
(NCS S 4040-Y70R)
 - 53/ _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1_ 2700 K - 12826,9 lm
D

/3_ 3500 K - 14703,6 lm
C

Tunable White
/8_ (2200 K - 4000 K)
14743,8 lm - 11402,6 lm
C

CRI >90

Control

3910 _ _ / _ _

_ _ / _ A Static White +
Push; 1-10V; DALI-2

_ _ / _ Z Static White +
Casambi

_ _ / 81 Tunable White +
DALI-2 DT8

_ _ / 8Z Tunable White +
Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 94,1 W 1050 mA
Constant Current 1050 mA
110-240V 50/60Hz

Tunable White:
1 x LED MODULE 92,7 W 1040 mA
Constant Current 1040 mA
120-250V 50/60Hz

Packaging

1 Box 1,16 x 1,16 x 0,35 m
Vol 0,487 m³
Gross weight 17,9 Kg Net weight 15,8 Kg

Notes

3910 _ _ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

LED IP20 CE UK ENE Dimmer

3915	Finishes		LED Colour Temperature		Control	
		23/ _ _ Beige L1 (NCS S 0502-Y50R)	Static White /1 _ 2700 K - 12826,9 lm		3915 _ _ / _ _	
		24/ _ _ Beige M1 (NCS S 2005-Y50R)	 /3 _ 3500 K - 14703,6 lm		_ _ / _ A Static White + Push; 1-10V; DALI-2	
		37/ _ _ Terra Red (NCS S 4040-Y70R)	 Tunable White		_ _ / _ Z Static White + Casambi	
		53/ _ _ Green M1 (NCS S 6005-G80Y)	/8 _ (2200 K - 4000 K) 14743,8 lm - 11402,6 lm		_ _ / 81 Tunable White + DALI-2 DT8	
			 CRI >90		_ _ / 8Z Tunable White + Casambi	
Materials			Packaging			
Body: Aluminum.			1 Box 1,16 x 1,16 x 0,35 m			
Shade: Aluminum.			Vol 0,487 m³			
Diffuser: PC- Polycarbonate.			Gross weight 19,2 Kg Net weight 17,1 Kg			
Light Source and electronics			Notes			
2700 K - 3500 K:			3915 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt			
1 x LED MODULE 94,1 W 1050 mA			       			
Constant Current 1050 mA						
110~240V 50/60Hz						
Tunable White:						
1 x LED MODULE 92,7 W 1040 mA						
Constant Current 1040 mA						
120~250V 50/60Hz						



Pendant



3920

Ø 80 cm



3925

Ø 84 cm



3930

Ø 103 cm



3935

Ø 107 cm

3920

Finishes

- 23/ _ _ Beige L1
(NCS S 0502-Y50R)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)
- 53/ _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

Static White

/1 _ 2700 K - 6547,3 lm

D >

/3 _ 3500 K - 7359,4 lm

C >

Tunable White

/8 _ (2200 K - 4000 K)
5748,1 lm - 7351,4 lm

C >

CRI >90

Control

3920 _ _ / _ _

_ _ / _ A Static White +
Push; 1-10V; DALI-2

_ _ / _ Z Static White +
Casambi

_ _ / 81 Tunable White +
DALI-2 DT8

_ _ / 8Z Tunable White +
Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110-240V 50/60Hz

Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120-250V 50/60Hz

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,487 m³
Gross weight 11,71 Kg Net weight 9,7 Kg

Notes

3920 _ _ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

LED **IP20** **CE** **UK** **EH** **Dimmer**

3925	Finishes 23/ _ _ Beige L1 (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 53/ _ _ Green M1 (NCS S 6005-G80Y)	LED Colour Temperature Static White /1 _ 2700 K - 6547,3 lm /3 _ 3500 K - 7359,4 lm Tunable White /8 _ (2200 K - 4000 K) 5748,1 lm - 7351,4 lm CRI >90	Control 3925 _ _ / _ _ _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8Z Tunable White + Casambi
	Materials Body: Aluminum. Shade: Aluminum. Diffuser: PC- Polycarbonate. Light Source and electronics 2700 K - 3500 K: 1 x LED MODULE 46,7 W 1050 mA Constant Current 1050 mA 110~240V 50/60Hz Tunable White: 1 x LED MODULE 45,6 W 1040 mA Constant Current 1040 mA 120~250V 50/60Hz	Packaging 1 Box 0,96 x 0,96 x 0,27 m Vol 0,487 m³ Gross weight 12,75 Kg Net weight 10,75 Kg Notes 3925 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt LED IP20 CE UK ErC Dimmer	

3930	Finishes 23/ _ _ Beige L1 (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 53/ _ _ Green M1 (NCS S 6005-G80Y)	LED Colour Temperature Static White /1 _ 2700 K - 12826,9 lm /3 _ 3500 K - 14703,6 lm Tunable White /8 _ (2200 K - 4000 K) 14743,8 lm - 11402,6 lm CRI >90	Control 3930 _ _ / _ _ _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8Z Tunable White + Casambi
	Materials Body: Aluminum. Shade: Aluminum. Diffuser: PC- Polycarbonate. Light Source and electronics 2700 K - 3500 K: 1 x LED MODULE 94,1 W 1050 mA Constant Current 1050 mA 110~240V 50/60Hz Tunable White: 1 x LED MODULE 92,7 W 1040 mA Constant Current 1040 mA 120~250V 50/60Hz	Packaging 1 Box 1,16 x 1,16 x 0,35 m Vol 0,487 m³ Gross weight 18 Kg Net weight 15,9 Kg Notes 3930 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt LED IP20 CE UK ErC Dimmer	

3935

Finishes

- 23/ _ _ Beige L1
(NCS S 0502-Y50R)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)
- 53/ _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

Static White
 /1 _ 2700 K - 12826,9 lm
 D
 /3 _ 3500 K - 14703,6 lm
 C
Tunable White
 /8 _ (2200 K - 4000 K)
 14743,8 lm - 11402,6 lm
 C
 CRI >90

Control

3935 _ _ / _ _
 _ _ / _ A Static White +
 Push; 1-10V; DALI-2
 _ _ / _ Z Static White +
 Casambi
 _ _ / 81 Tunable White +
 DALI-2 DT8
 _ _ / 8Z Tunable White +
 Casambi

Materials

Body: Aluminum. Shade: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
 1 x LED MODULE 94,1 W 1050 mA
 Constant Current 1050 mA
 110-240V 50/60Hz
Tunable White:
 1 x LED MODULE 92,7 W 1040 mA
 Constant Current 1040 mA
 120-250V 50/60Hz

Packaging

1 Box 1,16 x 1,16 x 0,35 m
 Vol 0,487 m³
 Gross weight 19,3 Kg Net weight 17,2 Kg

Notes

3935 _ _ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

LED IP20 CE ENEC ENEC Dimmer



Wind

Design by Jordi Vilardell

A perfect marriage of technology and tradition. Wind's drum shade is made of fibreglass, an innovative webbed texture and pattern that elevates the visual contribution of this timeless silhouette.

Outdoor



4072

Ø 60 cm



4077

Ø 60 cm



4078

Ø 120 cm



4057

Ø 60 x 191 cm



4062

Ø 120 x 195 cm



4067

Ø 60 x 166 cm

4057

Finishes

- **27/** _ _ Brown L1
(NCS S 1505-Y50R)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)
- **61/** _ _ Ocre red
(NCS S 3050-Y60R)

LED Colour Temperature

/1_ 2700 K - 3299 lm
D >90

Control

4057 _ _ / 10 On/ Off

Materials

Shade: FG- Fibreglass. Weight: Concrete.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz


Packaging

2 Boxes
Total Vol 1,0300 m³
Gross weight 45,1 Kg Net weight 27,8 Kg

Notes

Portable version. Electric cable 1,5 m

LED IP64 CE UK ENE

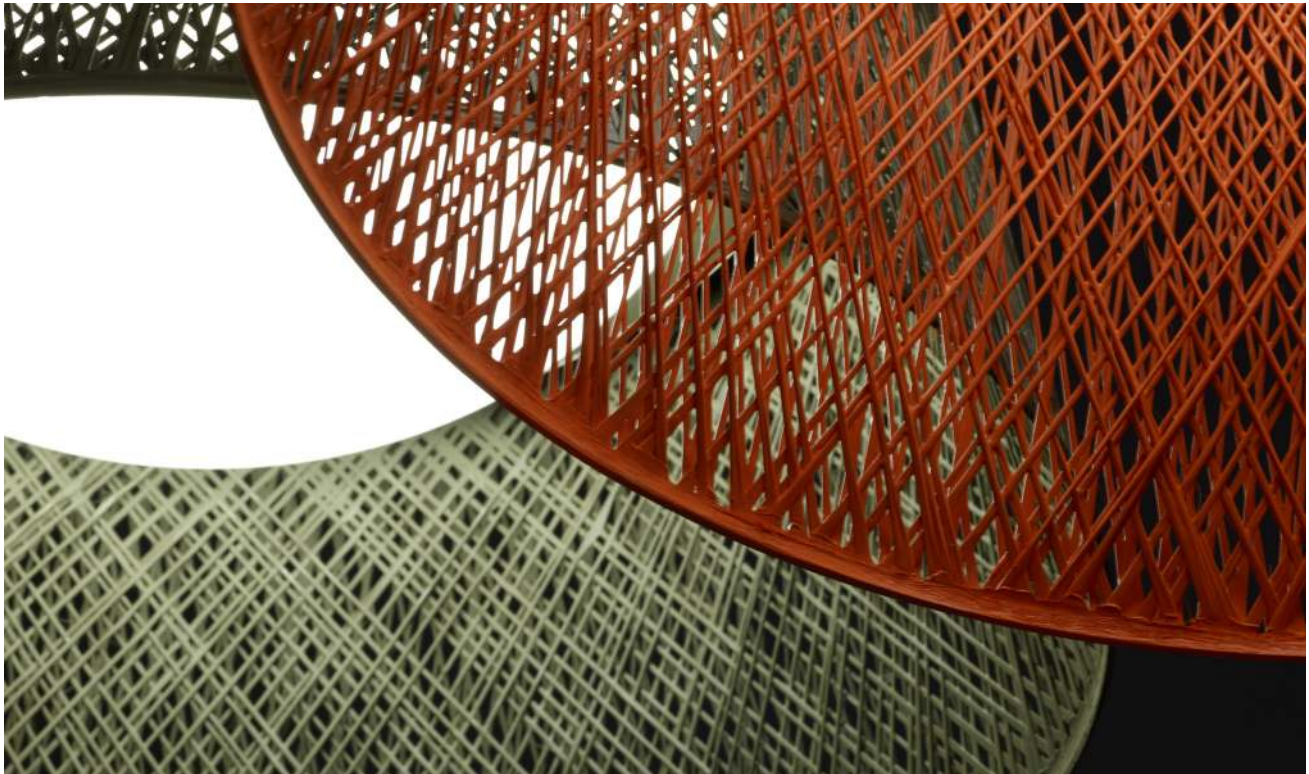

4062

Finishes

- 27/ _ _ Brown L1
(NCS S 1505-Y50R)
- 53/ _ _ Green M1
(NCS S 6005-G80Y)
- 61/ _ _ Ocre red
(NCS S 3050-Y60R)

LED Colour Temperature

/1_ 2700 K - 3481 lm



CRI >90

Control

4062 _ _ / 10 On/ Off

Materials

Shade: FG- Fiberglass. Base: FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

4 x LED PLATE 14 W 500 mA
1 x LED 2,4 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging

4 Boxes
Total Vol 2,3500 m³
Gross weight 125,2 Kg Net weight 113,23 Kg

Notes

Portable version. Electric cable 2 m

LED  IP64  CE  ENEC  Multi-volt

4067

Finishes

- 27/ _ _ Brown L1
(NCS S 1505-Y50R)
- 53/ _ _ Green M1
(NCS S 6005-G80Y)
- 61/ _ _ Ocre red
(NCS S 3050-Y60R)

LED Colour Temperature

/1_ 2700 K - 3481 lm



CRI >90

Control

4067 _ _ / 10 On/ Off

Materials

Shade: FG- Fiberglass. Base: FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
1 x LED 2,4 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging

3 Boxes
Total Vol 1,5000 m³
Gross weight 50 Kg Net weight 30,5 Kg

Notes

Portable version. Electric cable 1,5 m

LED  IP64  CE  ENEC 

4072

Finishes	LED Colour Temperature	Control
 27/ _ _ Brown L1 (NCS S 1505-Y50R)	/1 _ 2700 K - 3299 lm 	4072 _ _ / 10 On/ Off
 53/ _ _ Green M1 (NCS S 6005-G80Y)	CRI >90	
 61/ _ _ Ocre red (NCS S 3050-Y60R)		

Materials

Shade: FG- Fiberglass. Canopy: Steel.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,50 x 0,77 x 0,77 m
Vol 0,2970 m³
Gross weight 11,1 Kg Net weight 9,9 Kg

Notes

Surface mounted
Extra cable length.



4077

Finishes	LED Colour Temperature	Control
 27/ _ _ Brown L1 (NCS S 1505-Y50R)	/1 _ 2700 K - 3299 lm 	4077 _ _ / 10 On/ Off
 53/ _ _ Green M1 (NCS S 6005-G80Y)	CRI >90	
 61/ _ _ Ocre red (NCS S 3050-Y60R)		

Materials

Shade: FG- Fiberglass. Canopy: Steel.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics


1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,67 x 0,67 x 0,62 m
Vol 0,2970 m³
Gross weight 11 Kg Net weight 9,9 Kg

Notes

Surface mounted
Extra cable length.



4078

Finishes	LED Colour Temperature	Control
 27/ _ _ Brown L1 (NCS S 1505-Y50R)	/1 _ 2700 K - 3299 lm 	4078 _ _ / 10 On/ Off
 53/ _ _ Green M1 (NCS S 6005-G80Y)	CRI >90	
 61/ _ _ Ocre red (NCS S 3050-Y60R)		

Materials

Shade: FG- Fiberglass. Canopy: Steel.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics


3 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,74 x 1,24 x 1,27 m
Vol 1,1300 m³
Gross weight 38 Kg Net weight 30 Kg

Notes

Indoor only
Extra cable length.





Break

Design by Xuclà & Alemany

Break is distinguished by its architectural attitude. A series of cubic volumes provide indirect downlight while doubling up as a dynamic sculptural presence.

Outdoor



4101
25 x 81 cm



4106
25 x 43 cm



4108
48 x 38 cm

4101

Finishes
● 80/ __ Concrete
(Natural finish)

LED Colour Temperature
/1 _ 2700 K - 710 lm
E
CRI >80

Control
4101 __ / 10 On/ Off

Materials
Body: Steel.
Head: Concrete.
Base: Concrete.
Diffuser: PMMA.

Light Source and electronics
1 x LED 6,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,88 x 0,35 x 0,34 m
Vol 0,1032 m³
Gross weight 38,9 Kg Net weight 35,01 Kg

LED IP66 CE UK ENE Bi-volt

4106

Finishes
● 80/ __ Concrete
(Natural finish)

LED Colour Temperature
/1 _ 2700 K - 710 lm
E
CRI >80

Control
4106 __ / 10 On/ Off

Materials
Head: Concrete.
Base: Concrete.
Diffuser: PMMA.

Light Source and electronics
1 x LED 6,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,88 x 0,35 x 0,34 m
Vol 0,0598 m³
Gross weight 21,5 Kg Net weight 19,35 Kg

LED IP66 CE UK ENE Bi-volt

4108

Finishes
 ● 22/ Graphite Black
 (NCS S 8000-N)

LED Colour Temperature
 /1 2700 K - 2500 lm
 CRI >80

Control
 4108 22 / 10 On/ Off

Materials
 Body: Steel.
 Diffuser: PMMA.

Light Source and electronics
 2 x LED Strip 9,2 W 400 mA
 Constant Current 400 mA
 220~240V 50/60Hz

Packaging
 1 Box 0,49 x 0,51 x 0,52 m
 Vol 0,1312 m³
 Gross weight 6,6 Kg Net weight 16 Kg


LED IP66 CE UK ENEC

Break Plus

Design by Xuclà

Designed to blend instinctively with the architecture in which it exists, Break Plus converts any wall into a three dimensional mural. Arranged individually or as a group, it consists of four geometric volumes that cast beams of diffuse light upwards, downwards -or in both directions- creating a dynamic dialogue between light and shadow.

Outdoor

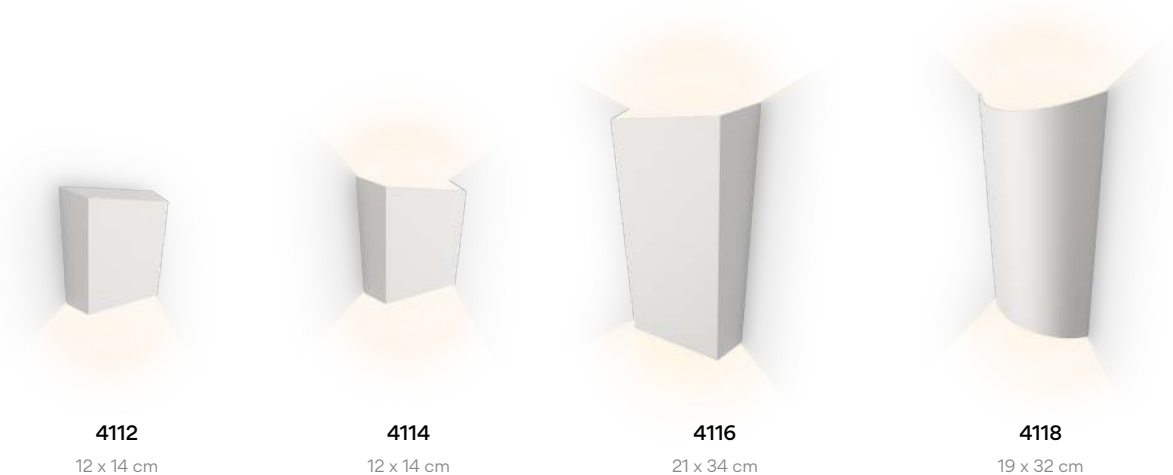

4112	Finishes 22/ _ _ Graphite Black (NCS S 8000-N) 25/ _ _ Beige D1 (NCS S 4005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 95/ _ _ Primer (NCS S 1000-N)	LED Colour Temperature /1 _ 2700 K - 113 lm ☐ F /3 _ 3500 K - 146 lm ☐ D CRI >90	Control 4112 _ _ / _ _ _ _ / _ 0 On/ Off _ _ / _ 1 30 DALI-2 (Remote) _ _ / _ Z 30 Casambi (Remote)
Materials Body: Aluminum. Diffuser: PC- Polycarbonate. Light Source and electronics 1 x LED 1W 350 mA Constant Current 350 mA 100~240Vac. 50/60Hz			Packaging 1 Box 0,07 x 0,19 x 0,23 m Vol 0,0030 m³ Gross weight 1 Kg Net weight 0,610 Kg Notes 4112 _ _ / _ 0: On/ Off ☐ Multi-volt 4112 _ _ / _ 1 30: DALI-2 ☐ Bi-volt LED ☐ IP65 CE UK ENEC
4114	Finishes 22/ _ _ Graphite Black (NCS S 8000-N) 25/ _ _ Beige D1 (NCS S 4005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 95/ _ _ Primer (NCS S 1000-N)	LED Colour Temperature /1 _ 2700 K - 227 lm ☐ F /3 _ 3500 K - 292 lm ☐ D CRI >90	Control 4114 _ _ / _ _ _ _ / _ 0 On/ Off _ _ / _ 1 30 DALI-2 (Remote) _ _ / _ Z 30 Casambi (Remote)
Materials Body: Aluminum. Diffuser: PC- Polycarbonate. Light Source and electronics 2 x LED 1W 350 mA Constant Current 350 mA 100~240Vac. 50/60Hz			Packaging 1 Box 0,07 x 0,19 x 0,23 m Vol 0,0030 m³ Gross weight 1 Kg Net weight 0,590 Kg Notes 4114 _ _ / _ 0: On/ Off ☐ Multi-volt 4114 _ _ / _ 1 30: DALI-2 ☐ Bi-volt LED ☐ IP65 CE UK ENEC



4116

Finishes 22/ _ _ Graphite Black (NCS S 8000-N) 25/ _ _ Beige D1 (NCS S 4005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 95/ _ _ Primer (NCS S 1000-N)	LED Colour Temperature /1_ 2700 K - 707 lm G /3_ 3500 K - 925 lm F CRI >90	Control 4116 _ _ / _ _ _ _ / _ 0 On/ Off _ _ / _ 1 30 DALI-2 (Remote) _ _ / _ Z 30 Casambi (Remote)
Materials Body: Aluminum. Diffuser: PC- Polycarbonate. Light Source and electronics 2 x LED 4W 350 mA Constant Current 350 mA 100-240Vac. 50/60Hz	Packaging 1 Box 0,11 x 0,27 x 0,42 m Vol 0,0120 m³ Gross weight 3,2 Kg Net weight 2,2 Kg Notes 4116 _ _ / _ 0: On/ Off Multi-volt 4116 _ _ / _ 1 30: DALI-2 Bi-volt LED IP65 CE UK ERC	

4118


Finishes 22/ _ _ Graphite Black (NCS S 8000-N) 25/ _ _ Beige D1 (NCS S 4005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 95/ _ _ Primer (NCS S 1000-N)	LED Colour Temperature /1_ 2700 K - 707 lm G /3_ 3500 K - 925 lm F CRI >90	Control 4118 _ _ / _ _ _ _ / _ 0 On/ Off _ _ / _ 1 30 DALI-2 (Remote) _ _ / _ Z 30 Casambi (Remote)
Materials Body: Aluminum. Diffuser: PC- Polycarbonate. Light Source and electronics 2 x LED 4W 350 mA Constant Current 350 mA 100-240Vac. 50/60Hz	Packaging 1 Box 0,11 x 0,27 x 0,42 m Vol 0,0120 m³ Gross weight 3,2 Kg Net weight 1,71 Kg Notes 4118 _ _ / _ 0: On/ Off Multi-volt 4118 _ _ / _ 1 30: DALI-2 Bi-volt LED IP65 CE UK ERC	

Empty

Design by Xuclà

Empty, lends itself to Vibia's 'furniture meets light' concept. Incorporating a table, stool and light fixture into a single three-dimensional entity, each geometric structure glows with subtle, indirect light from an invisible source.

Outdoor

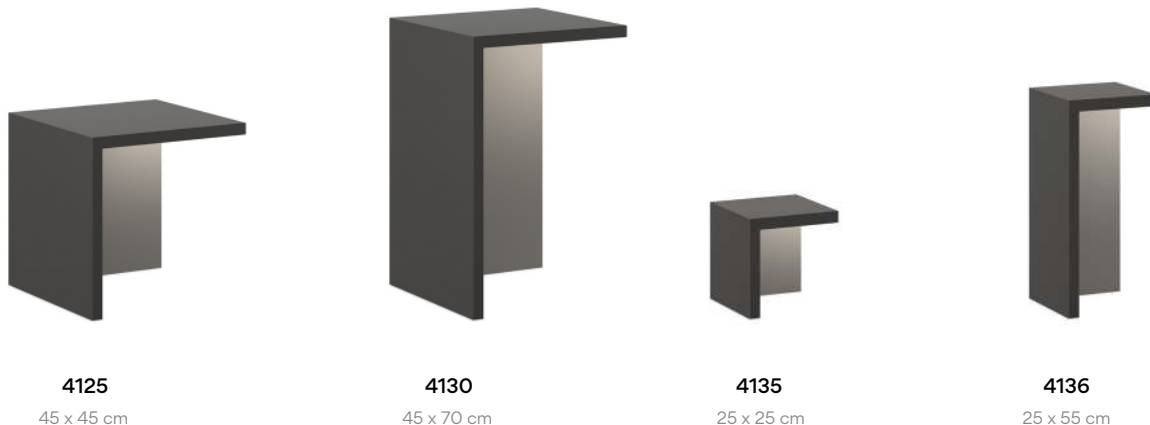

4125

Finishes ● 18/ __ Polymer Concrete Grey (NCS S 2002-B50G) ● 22/ __ Graphite Black (NCS S 8000-N)	LED Colour Temperature /1 _ 2700 K - 664 lm /3 _ 3500 K - 1247 lm  CRI >80 CRI >90	Control 4125 __ / _ 0 On/ Off
Materials Body: Polymer concrete. Diffuser: PMMA.	Packaging 1 Box 0,56 x 0,50 x 0,50 m Vol 0,176 m³ Gross weight 40 Kg Net weight 36 Kg	
Light Source and electronics 2 x LED STRIP 24V 8,6 W Constant Voltage 24V 100~277V 50/60Hz	Notes Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.	
      		

4130

Finishes		LED Colour Temperature	Control
 18/ __ Polymer Concrete Grey (NCS S 2002-B50G)	/1 _ 2700 K - 664 lm		4130 __ / _ 0 On/ Off
 22/ __ Graphite Black (NCS S 8000-N)	/3 _ 3500 K - 1247 lm		
			
		CRI >80 CRI >90	

Materials	Packaging
Body: Polymer concrete.	1 Box 0,56 x 0,56 x 0,81 m
Diffuser: PMMA.	Vol 0,254 m³
	Gross weight 54,7 Kg Net weight 49,7 Kg

Light Source and electronics	Notes
2 x LED STRIP 24V 8,6 W	Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.
Constant Voltage 24V	
100~277V 50/60Hz	

LED



IP66









Multi-volt



4135

- Finishes**
- 18/ __ Polymer Concrete Grey (NCS S 2002-B50G)
 - 22/ __ Graphite Black (NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 304 lm
/3 _ 3500 K - 1247 lm
6

CRI >80 CRI >90

Control

4135 __ / _ 0 On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 4,3 W
Constant Voltage 24V
100-240V 50/60Hz

Packaging

1 Box 0,36 x 0,36 x 0,36 m
Vol 0,04 m³
Gross weight 12,2 Kg Net weight 10,4 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 CE ENEC ENEC Bi-volt

4136

- Finishes**
- 18/ __ Polymer Concrete Grey (NCS S 2002-B50G)
 - 22/ __ Graphite Black (NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 304 lm
/3 _ 3500 K - 1247 lm
6

CRI >80 CRI >90

Control

4136 __ / _ 0 On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 4,3 W
Constant Voltage 24V
100-240V 50/60Hz

Packaging

1 Box 0,36 x 0,36 x 0,65 m
Vol 0,084 m³
Gross weight 22 Kg Net weight 19 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 CE ENEC ENEC Dimmer Bi-volt

Out

Design by Víctor Carrasco

A romantic response to the global transition to life outside, Out brings the intimacy of indoor lighting outdoors. Suitable for illuminating a table or meeting point, this luminaire emanates with a soft, diffuse downlight, its source obscured by a translucent screen.

Floor Outdoor



4270 Not Fixed
211 x 242 cm



4275 Bolt-down "hard wired"
211 x 242 cm

4270

Finishes

- **22/** __ Graphite Black
(NCS S 8000-N)
- **23/** __ Warm White
(NCS S 0502-Y50R)
- **25/** __ Beige D1
(NCS S 4005-Y50R)
- **36/** __ Soft Pink
(NCS S 1010-Y50R)
- **37/** __ Terra Red
(NCS S 4040-Y70R)
- **47/** __ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1300 lm
F >90

Control

4270 __ / __
__ / __ 5 Push
__ / __ Z Casambi

Materials

Tube: Stainless Steel.
Shades: Aluminum.
Diffuser: PE- Polyethylene.

Light Source and electronics

1 x LED 12,4 W 700 mA
Constant Voltage 24V 1.0A
220-240V. 50/60Hz

Packaging

5 Boxes
Box 1: 0,17 x 0,39 x 0,51 m
Box 2: 0,17 x 0,39 x 0,51 m
Box 3: 0,60 x 0,60 x 0,27 m
Box 4: 0,72 x 0,72 x 0,32 m
Box 5: 2,40 x 2,10 x 0,1 m
Total Vol 0,835 m³
Gross weight 84 Kg Net weight 49,5 Kg

Notes

Switch on the cable. Electric cable 4 m.

LED IP44 CE UK ENE



4275

Finishes

- **22/** _ _ Graphite Black
(NCS S 8000-N)
- **23/** _ _ Warm White
(NCS S 0502-Y50R)
- **25/** _ _ Beige D1
(NCS S 4005-Y50R)
- **36/** _ _ Soft Pink
(NCS S 1010-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **47/** _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1300 lm

F >

CRI >90

Control

4275 _ _ / _ _

_ _ / _ 1 DALI-2

_ _ / _ Z _ 30 Casambi
(Remote)

Materials

Tube: Stainless Steel.
Shades: Aluminum.
Diffuser: PE- Polyethylene.

Light Source and electronics

1 x LED 12,4 W 700 mA
Constant Current 700 mA
220~240V. 50/60Hz

Packaging

5 Boxes
Box 1: 0,17 x 0,39 x 0,51 m
Box 2: 0,17 x 0,39 x 0,51 m
Box 3: 0,60 x 0,60 x 0,27 m
Box 4: 0,72 x 0,72 x 0,32 m
Box 5: 2,40 x 2,10 x 0,1 m
Total Vol 0,835 m³
Gross weight 84 Kg Net weight 49,5 Kg

Notes

4275 _ _ / _ 1: DALI-2 **Bi-volt**

Bolt-down "hard wired"

LED **IP65** **CE** **UK** **ERC** **RoHS**

Up

Design by Ramos & Bassols

Inspired by the neoclassical cornice, Up's geometric form protudes from the ceiling with a quiet elegance. Its broad flat diffuser and refined rim create the illusion of daylight passing through an opening in the ceiling.

Ceiling



4440 Ø 50 cm	Finishes ● 18/ _ _ Graphite (RAL 7016) ● 93/ _ _ White (RAL 9016) LED Colour Temperature Static White /1 _ 2700 K - 2207 lm F Tunable White /8 _ (2200 K - 4000 K) 1901 lm - 2461 lm G - F CRI >90 Materials Diffuser: PC- Polycarbonate. Body: Aluminum. Ceiling support: Steel. Light Source and electronics 1 x LED PLATE 26,5 W 500 mA Constant Current 700 mA 110-240V 50/60Hz	Control 4440 _ _ / _ _ _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8Z Tunable White + Casambi Packaging 1 Box 0,17 x 0,55 x 0,55 m Vol 0,0514 m³ Gross weight 11 Kg Net weight 7,5 Kg LED IP20 CE UK ENEC
4442 Ø 77 cm	Finishes ● 18/ _ _ Graphite (RAL 7016) ● 93/ _ _ White (RAL 9016) LED Colour Temperature Static White /1 _ 2700 K - 3959 lm F Tunable White /8 _ (2200 K - 4000 K) 3138 lm - 4238 lm G - F CRI >90 Materials Diffuser: PC- Polycarbonate. Body: Aluminum. Ceiling support: Steel. Light Source and electronics 1 x LED PLATE 55,3 W 500 mA Constant Current 500 mA 110-240V 50/60Hz	Control 4442 _ _ / _ _ _ _ / _ A Static White + Push; 1-10V; DALI-2 _ _ / _ Z Static White + Casambi _ _ / 81 Tunable White + DALI-2 DT8 _ _ / 8Z Tunable White + Casambi Packaging 1 Box 0,17 x 0,90 x 0,90 m Vol 0,1377 m³ Gross weight 13 Kg Net weight 15 Kg LED IP20 CE UK ENEC
4460 106 x 106 cm		
4452 31 x 121 cm		
4454 64 x 64 cm		

4452

Finishes
 18/ _ _ Graphite (RAL 7016)
 93/ _ _ White (RAL 9016)

LED Colour Temperature
Static White
 /1_ 2700 K - 3957 lm
 F
Tunable White
 /8_ (2200 K - 4000 K)
 4355 lm - 5744 lm
 G - F
 CRI >90

Control

4452 _ _ / _ _

_ _ / _ A Static White +
 Push; 1-10V; DALI-2
 _ _ / _ Z Static White + Casambi
 _ _ / 81 Tunable White +
 DALI-2 DT8
 _ _ / 8Z Tunable White +
 Casambi

Materials

Diffuser: PC- Polycarbonate.
 Body: Aluminum.
 Ceiling support: Steel.

Light Source and electronics
 1 x LED PLATE 50 W 900 mA
 Constant Current 900 mA
 110~240V 50/60Hz

Packaging

1 Box 0,17 x 0,42 x 1,31 m
 Vol 0,0924 m³
 Gross weight 14 Kg Net weight 12 Kg

LED IP20 CE UK ENE

4454

Finishes
 18/ _ _ Graphite (RAL 7016)
 93/ _ _ White (RAL 9016)

LED Colour Temperature
Static White
 /1_ 2700 K - 3957 lm
 F
Tunable White
 /8_ (2200 K - 4000 K)
 5050 lm - 5039 lm
 G - F
 CRI >90

Control

4454 _ _ / _ _

_ _ / _ A Static White +
 Push; 1-10V; DALI-2
 _ _ / _ Z Static White + Casambi
 _ _ / 81 Tunable White +
 DALI-2 DT8
 _ _ / 8Z Tunable White +
 Casambi

Materials

Diffuser: PC- Polycarbonate.
 Body: Aluminum.
 Ceiling support: Steel.

Light Source and electronics
 1 x LED PLATE 50 W 900 mA
 Constant Current 900 mA
 110~240V 50/60Hz

Packaging

1 Box 0,17 x 0,73 x 0,73 m
 Vol 0,0905 m³
 Gross weight 14 Kg Net weight 13 Kg

LED IP20 CE UK ENE

4460

Finishes
 18/ _ _ Graphite (RAL 7016)
 93/ _ _ White (RAL 9016)

LED Colour Temperature
Static White
 /1_ 2700 K - 3957 lm
 G
Tunable White
 /8_ (2200 K - 4000 K)
 5039 lm - 6699 lm
 G - F
 CRI >90

Control

4460 _ _ / _ _

_ _ / _ A Static White +
 Push; 1-10V; DALI-2
 _ _ / _ Z Static White + Casambi
 _ _ / 81 Tunable White +
 DALI-2 DT8
 _ _ / 8Z Tunable White +
 Casambi

Materials

Diffuser: PC- Polycarbonate.
 Body: Aluminum.
 Ceiling support: Steel.

Light Source and electronics
 1 x LED PLATE 26,5 W 500 mA
 1 x LED PLATE 55,3W 750 mA
 Constant Current 500 / 750 mA
 110~240V 50/60Hz

Packaging

2 Boxes
 Total Vol 0,1891 m³
 Gross weight 24 Kg Net weight 23 Kg

Notes

Only one electric connection point

LED IP20 CE UK ENE

Origami

Design by Ramón Esteve

Recalling the folded paper of the Japanese art form for which it's named, Origami generates a stunning play of light and shadows. Composed of two architectural modules that be arranged in countless personalized designs, it creates the effect of climbing ivy along a blank expanse of wall.

Wall Outdoor

4500

30 x 30 cm



4501

30 x 30 cm



4504

53 x 63cm



4506

70 x 91 cm

4508

94 x 107 cm

Each project is unique.
Visit vibia.com and
chose among multiple
compositions designed
and adapted to your
project needs.

Personalise your own
Origami composition
quick and easy at
vibia.com

4500

Finishes

- 10/ _ _ White
(NCS S 0300-N)
- 29/ _ _ Brown D1
(NCS S 8005-Y50R)
- 38/ _ _ Terra Dark
(NCS S 5040-Y70R)
- 53/ _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1_ 2700 K - 756 lm
- /3_ 3500 K - 799 lm
- CRI >90

Control

4500 _ _ / _ 4 TRIAC

Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

1 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging

1 Box 0,35 x 0,35 x 0,12 m
Vol 0,0150 m³
Gross weight 1,5 Kg Net weight 1 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 CE UK ENEC Multi-volt

4501	Finishes 10/ _ _ White (NCS S 0300-N) 29/ _ _ Brown D1 (NCS S 8005-Y50R) 38/ _ _ Terra Dark (NCS S 5040-Y70R) 53/ _ _ Green M1 (NCS S 6005-G80Y)	LED Colour Temperature /1 _ 2700 K - 756 lm D /3 _ 3500 K - 799 lm E CRI >90	Control 4501 _ _ / _ 4 TRIAC
	Materials Shade: ABS. Diffuser: PC- Polycarbonate. Lid: PC- Polycarbonate. Arm: PC- Polycarbonate. Light Source and electronics 1 x LED STRIP 6,3 W 350 mA Constant Current 350 mA 110~277V 50/60Hz	Packaging 1 Box 0,35 x 0,35 x 0,12 m Vol 0,0150 m³ Gross weight 1,5 Kg Net weight 1 Kg Notes A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system LED  IP65     Multi-volt	

4504	Finishes 10/ _ _ White (NCS S 0300-N) 29/ _ _ Brown D1 (NCS S 8005-Y50R) 38/ _ _ Terra Dark (NCS S 5040-Y70R) 53/ _ _ Green M1 (NCS S 6005-G80Y)	LED Colour Temperature /1 _ 2700 K - 1512 lm D /3 _ 3500 K - 1598 lm E CRI >90	Control 4504 _ _ / _ 4 TRIAC
	Materials Shade: ABS. Diffuser: PC- Polycarbonate. Lid: PC- Polycarbonate. Arm: PC- Polycarbonate. Light Source and electronics 2 x LED STRIP 6,3 W 350 mA Constant Current 350 mA 110~277V 50/60Hz	Packaging 1 Box 0,64 x 0,40 x 0,22 m Vol 0,0563 m³ Gross weight 4,05 Kg Net weight 2,15 Kg Notes A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system LED  IP65     Multi-volt	

4506	Finishes 10/ _ _ White (NCS S 0300-N) 29/ _ _ Brown D1 (NCS S 8005-Y50R) 38/ _ _ Terra Dark (NCS S 5040-Y70R) 53/ _ _ Green M1 (NCS S 6005-G80Y)	LED Colour Temperature /1 _ 2700 K - 2269 lm D /3 _ 3500 K - 2397 lm E CRI >90	Control 4506 _ _ / _ 4 TRIAC
	Materials Shade: ABS. Diffuser: PC- Polycarbonate. Lid: PC- Polycarbonate. Arm: PC- Polycarbonate. Light Source and electronics 3 x LED STRIP 6,3 W 350 mA Constant Current 350 mA 110~277V 50/60Hz	Packaging 1 Box 0,95 x 0,40 x 0,22 m Vol 0,0836 m³ Gross weight 5,33 Kg Net weight 3,23 Kg Notes A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system LED  IP65     Multi-volt	

4508

- Finishes**
- 10/ _ _ White
(NCS S 0300-N)
 - 29/ _ _ Brown D1
(NCS S 8005-Y50R)
 - 38/ _ _ Terra Dark
(NCS S 5040-Y70R)
 - 53/ _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 3025 lm
D

/3 _ 3500 K - 3196 lm
E

CRI >90

Control

4508 _ _ / _ 4 TRIAC

Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

4 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz


Packaging

1 Box 1,25 x 0,40 x 0,22 m
Vol 0,1100 m³
Gross weight 7,2 Kg Net weight 6,48 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 CE UK ENEC Multi-volt

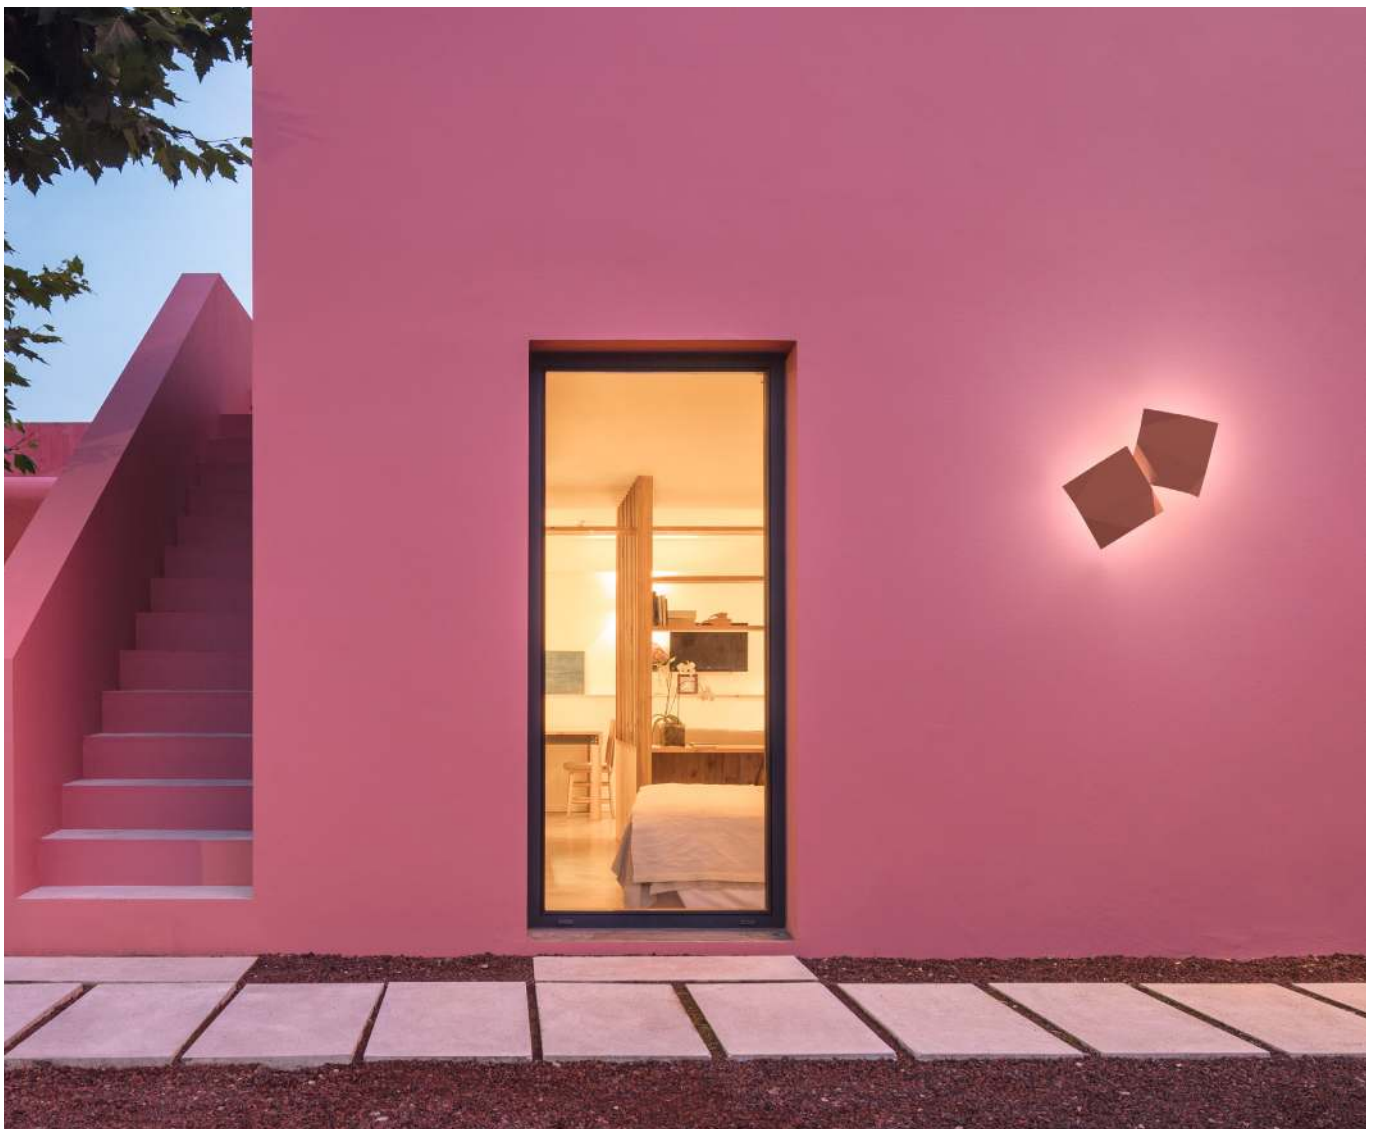

Palo Alto

Design by Xuclà

Palo Alto is defined by a linear, angular silhouette. Industrial in style yet natural in form, it recalls a tree whose steel “branches” are embedded with LEDs, illuminating the surrounding landscape with a diffuse downlight.

Outdoor



4510	Finishes	LED Colour Temperature	Control
	● 22/ _ _ Graphite Black (NCS S 8000-N)	/1 _ 2700 K - 179 lm	4510 _ _ / _ 0 On/ Off
	● 29/ _ _ Brown D1 (NCS S 8005-Y50R)	/3 _ 3500 K - 179 lm	
		G	
Materials		Packaging	
Body: Steel. Cover: Steel.		1 Box 0,44 x 0,40 x 1,10 m Vol 0,2080 m³ Gross weight 11,1 Kg Net weight 10 Kg	
Light Source and electronics		LED IP65 CE UK ENEC Bi-volt	
2 x LED 2,2 W 700 mA Constant Current 700 mA 220~240V 50/60Hz			
4516	Finishes	LED Colour Temperature	Control
	● 22/ _ _ Graphite Black (NCS S 8000-N)	/1 _ 2700 K - 1044 lm	4516 _ _ / _ 0 On/ Off
	● 29/ _ _ Brown D1 (NCS S 8005-Y50R)	/3 _ 3500 K - 1045 lm	
		G	
Materials		Packaging	
Body: Steel. Cover: Steel.		1 Box 0,32 x 0,32 x 2,64 m Vol 0,2703 m³ Gross weight 18,4 Kg Net weight 16,5 Kg	
Light Source and electronics		LED IP65 CE UK ENEC Multi-volt	
1 x LED MODULE 24V 15 W Constant Voltage 24V 100~240V 50/60Hz			

4539

- Finishes**
- 22/ _ _ Graphite Black (NCS S 8000-N)
 - 29/ _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2089 lm
/3 _ 3500 K - 2089 lm

G →

CRI >90

Control

4539 _ _ / _ 0 On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics

2 x LED MODULE 24V 15 W
Constant Voltage 24V
100-240V 50/60Hz

Packaging

1 Box 0,37 x 0,37 x 2,61 m
Vol 0,3570 m³
Gross weight 46,4 Kg Net weight 41,76 Kg

LED IP65 CE ENEC ENEC Multi-volt

4540

- Finishes**
- 22/ _ _ Graphite Black (NCS S 8000-N)
 - 29/ _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3134 lm
/3 _ 3500 K - 3134 lm

G →

CRI >90

Control

4540 _ _ / _ 0 On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics

3 x LED MODULE 24V 15 W
Constant Voltage 24V
100-240V 50/60Hz

Packaging

1 Box 0,40 x 0,44 x 2,64 m
Vol 0,4646 m³
Gross weight 55,4 Kg Net weight 49,86 Kg

LED IP65 CE ENEC ENEC Multi-volt



Brisa

Design by Lievore, Altherr, Molina

Inspired by the forest blue bellflower,
Brisa is the essence of flawless landscape integration.
Its stylised silhouette and natural inspiration bring
a subtle charm to any exterior.

Outdoor



4625
10 x 103 cm



4630
10 x 100 cm



4635
22 x 99,5 x 23 cm



4640
30 x 100 x 27,5 cm

4625

Finishes

- **07/** _ _ Khaki
(RAL 7039)
- **54/** _ _ Oxide
(RAL 8014)

LED Colour Temperature

/1 _ 2700 K - 181 lm

G >

/3 _ 3500 K - 193 lm

F >

CRI >90

Control

4625 _ _ / _ 0 On/ Off

Materials

Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,16 x 0,16 x 1,6 m
Vol 0,0409 m³
Gross weight 1,8 Kg Net weight 1,3 Kg

Notes

Spike. Surface

LED  IP64     Bi-volt

4630

- Finishes
- 07/ _ _ Khaki (RAL 7039)
 - 54/ _ _ Oxide (RAL 8014)

LED Colour Temperature

/1 _ 2700 K - 181 lm
[G]

/3 _ 3500 K - 193 lm
[F]

CRI >90

Control

4630 _ _ / _ 0 On/ Off

Materials

Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,16 x 0,16 x 1,6 m
Vol 0,0409 m³
Gross weight 2,6 Kg Net weight 2 Kg

Notes

Built-in

LED [G] IP65 CE UK ENEC
Multi-volt [F] Ø 13 cm

4635

- Finishes
- 07/ _ _ Khaki (RAL 7039)
 - 54/ _ _ Oxide (RAL 8014)

LED Colour Temperature

/1 _ 2700 K - 543 lm
[G]

/3 _ 3500 K - 581 lm
[F]

CRI >90

Control

4635 _ _ / _ 0 On/ Off

Materials

Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics

3 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,32 x 0,36 x 1,16 m
Vol 0,1336 m³
Gross weight 6,5 Kg Net weight 5,85 Kg

Notes

Built-in

LED [G] IP65 CE UK ENEC
Bi-volt [F] Ø 17 cm

4640

- Finishes
- 07/ _ _ Khaki (RAL 7039)
 - 54/ _ _ Oxide (RAL 8014)

LED Colour Temperature

/1 _ 2700 K - 905 lm
[G]

/3 _ 3500 K - 965 lm
[F]

CRI >90

Control

4640 _ _ / _ 0 On/ Off

Materials

Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics

5 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,32 x 0,36 x 1,16 m
Vol 0,1336 m³
Gross weight 6 Kg Net weight 4 Kg

Notes

Built-in

LED [G] IP65 CE UK ENEC
Bi-volt [F] Ø 22,5 cm

Dots

Design by Martín Azúa

A diminutive wall scone delivers outsized impact in the form of simple, circular v. Seamlessly connecting a space with an intimate landscape of beams and halos, the collection creates a melody of light like a composition of musical notes in concert with another.

Wall



4660

Finishes 13/ __ Off-White (NCS S 1000-N) 27/ __ Brown L1 (NCS S 1505-Y50R) 37/ __ Terra Red (NCS S 4040-Y70R) 47/ __ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 482 lm /3 _ 3500 K - 520 lm F CRI >90	Control 4660 __ / __ / _ 0 On/ Off / _ 1 DALI-2 / _ 3 1-10V / _ 4 TRIAC
Finishes 82/ __ White oak 83/ __ American walnut	LED Colour Temperature /1 _ 2700 K - 482 lm /3 _ 3500 K - 520 lm F CRI >90	Control 4660 __ / __ / _ 0 On/ Off / _ 1 DALI-2 / _ 3 1-10V / _ 4 TRIAC

Materials

Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes

22° light halo

LED  IP20    

4662

Finishes 13/ __ Off-White (NCS S 1000-N) 27/ __ Brown L1 (NCS S 1505-Y50R) 37/ __ Terra Red (NCS S 4040-Y70R) 47/ __ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 482 lm /3 _ 3500 K - 520 lm F CRI >90	Control 4662 __ / __ / _ 0 On/ Off / _ 4 TRIAC
Finishes 82/ __ White oak 83/ __ American walnut	LED Colour Temperature /1 _ 2700 K - 482 lm /3 _ 3500 K - 520 lm F CRI >90	Control 4662 __ / __ / _ 0 On/ Off / _ 4 TRIAC

Materials

Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes

22° light halo
Switch on the back plate

LED  IP20    

4665	Finishes 13/ _ _ Off-White (NCS S 1000-N) 27/ _ _ Brown L1 (NCS S 1505-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 482 lm /3 _ 3500 K - 412 lm F CRI >90	Control 4665 _ _ / _ 0 On/ Off
	Materials Body: ABS. Diffuser: PC- Polycarbonate. Canopy: Aluminum. Light Source and electronics 1 x LED 5,75 W 500 mA Constant Current 500 mA 220~240V 50/60Hz	Packaging 1 Box 0,13 x 0,22 x 0,21 m Vol 0,0062 m³ Gross weight 0,65 Kg Net weight 0,4 Kg LED IP20 CE UK ERL	

4670	Finishes 13/ _ _ Off-White (NCS S 1000-N) 27/ _ _ Brown L1 (NCS S 1505-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 482 lm /3 _ 3500 K - 412 lm F CRI >90	Control 4670 _ _ / _ _ _ _ / _ 0 On/ Off _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 TRIAC
	Finishes 82/ _ _ White oak 83/ _ _ American walnut	LED Colour Temperature /1 _ 2700 K - 482 lm /3 _ 3500 K - 412 lm F CRI >90	Control 4670 _ _ / _ _ _ _ / _ 0 On/ Off _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 TRIAC
	Materials Body: ABS / Wood. Diffuser: PC- Polycarbonate. Canopy: Aluminum. Light Source and electronics 1 x LED 5,75 W 500 mA Constant Current 500 mA 220~240V 50/60Hz	Packaging 1 Box 0,13 x 0,22 x 0,21 m Vol 0,0062 m³ ABS: Gross weight 0,65 Kg Net weight 0,4 Kg Natural wood: Gross weight 0,85 Kg Net weight 0,6 Kg LED IP20 CE UK ERL	

4675

Finishes	LED Colour Temperature	Control
13/ _ _ Off-White (NCS S 1000-N)	/1 _ 2700 K - 573 lm E	4675 _ _ / _ _
27/ _ _ Brown L1 (NCS S 1505-Y50R)	/3 _ 3500 K - 515 lm F	_ _ / _ 0 On/ Off
37/ _ _ Terra Red (NCS S 4040-Y70R)	CRI >90	_ _ / _ 1 DALI-2
47/ _ _ Green L1 (NCS S 4005-G80Y)		_ _ / _ 3 1-10V
		_ _ / _ 4 TRIAC

Finishes	LED Colour Temperature	Control
82/ _ _ White oak	/1 _ 2700 K - 482 lm	4675 _ _ / _ _
83/ _ _ American walnut	/3 _ 3500 K - 515 lm F	_ _ / _ 0 On/ Off
	CRI >90	_ _ / _ 1 DALI-2
		_ _ / _ 3 1-10V
		_ _ / _ 4 TRIAC

Materials

Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics
1 x LED PLATE 4,5 W 500 mA
Constant Current 500 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes

4675 _ _ / _ 0: On/ Off **Bi-volt**

LED IP20 CE UK ENE



Dots Glass

Design by Martín Azúa

Sheathed in layers of transparent optical glass, the LED source within the fixture generates a warm, 360-degree glow, while the layering of the glass and aluminum at the edge of each disc creates a pulsating ambient effect.

Wall Outdoor



Ø 20 cm

4680

Finishes
● 10/ _ _ White
(NCS S 0300-N)

LED Colour Temperature
/1_ 2700 K - 985 lm
/3_ 3500 K - 1015 lm
F
CRI >90

Control
4680 _ _ / _ _

_ _ / _ 0 On/ Off
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z 30 Casambi
(Remote)


Materials
Body: Aluminum.
Diffuser: Optical Glass.

Light Source and electronics
1 x LED 10 W 500 mA
Constant Current 500 mA
100~240Vac 50/60Hz

Packaging
1 Box 0,305 x 0,305 x 0,105 m
Vol 0,00976 m³
Gross weight 1,8 Kg Net weight 2,2 Kg

Notes
4680 _ _ / _ 1: DALI-2 Bi-volt
4680 _ _ / _ 3: 1-10V Bi-volt

LED IP66 CE UK ENEC

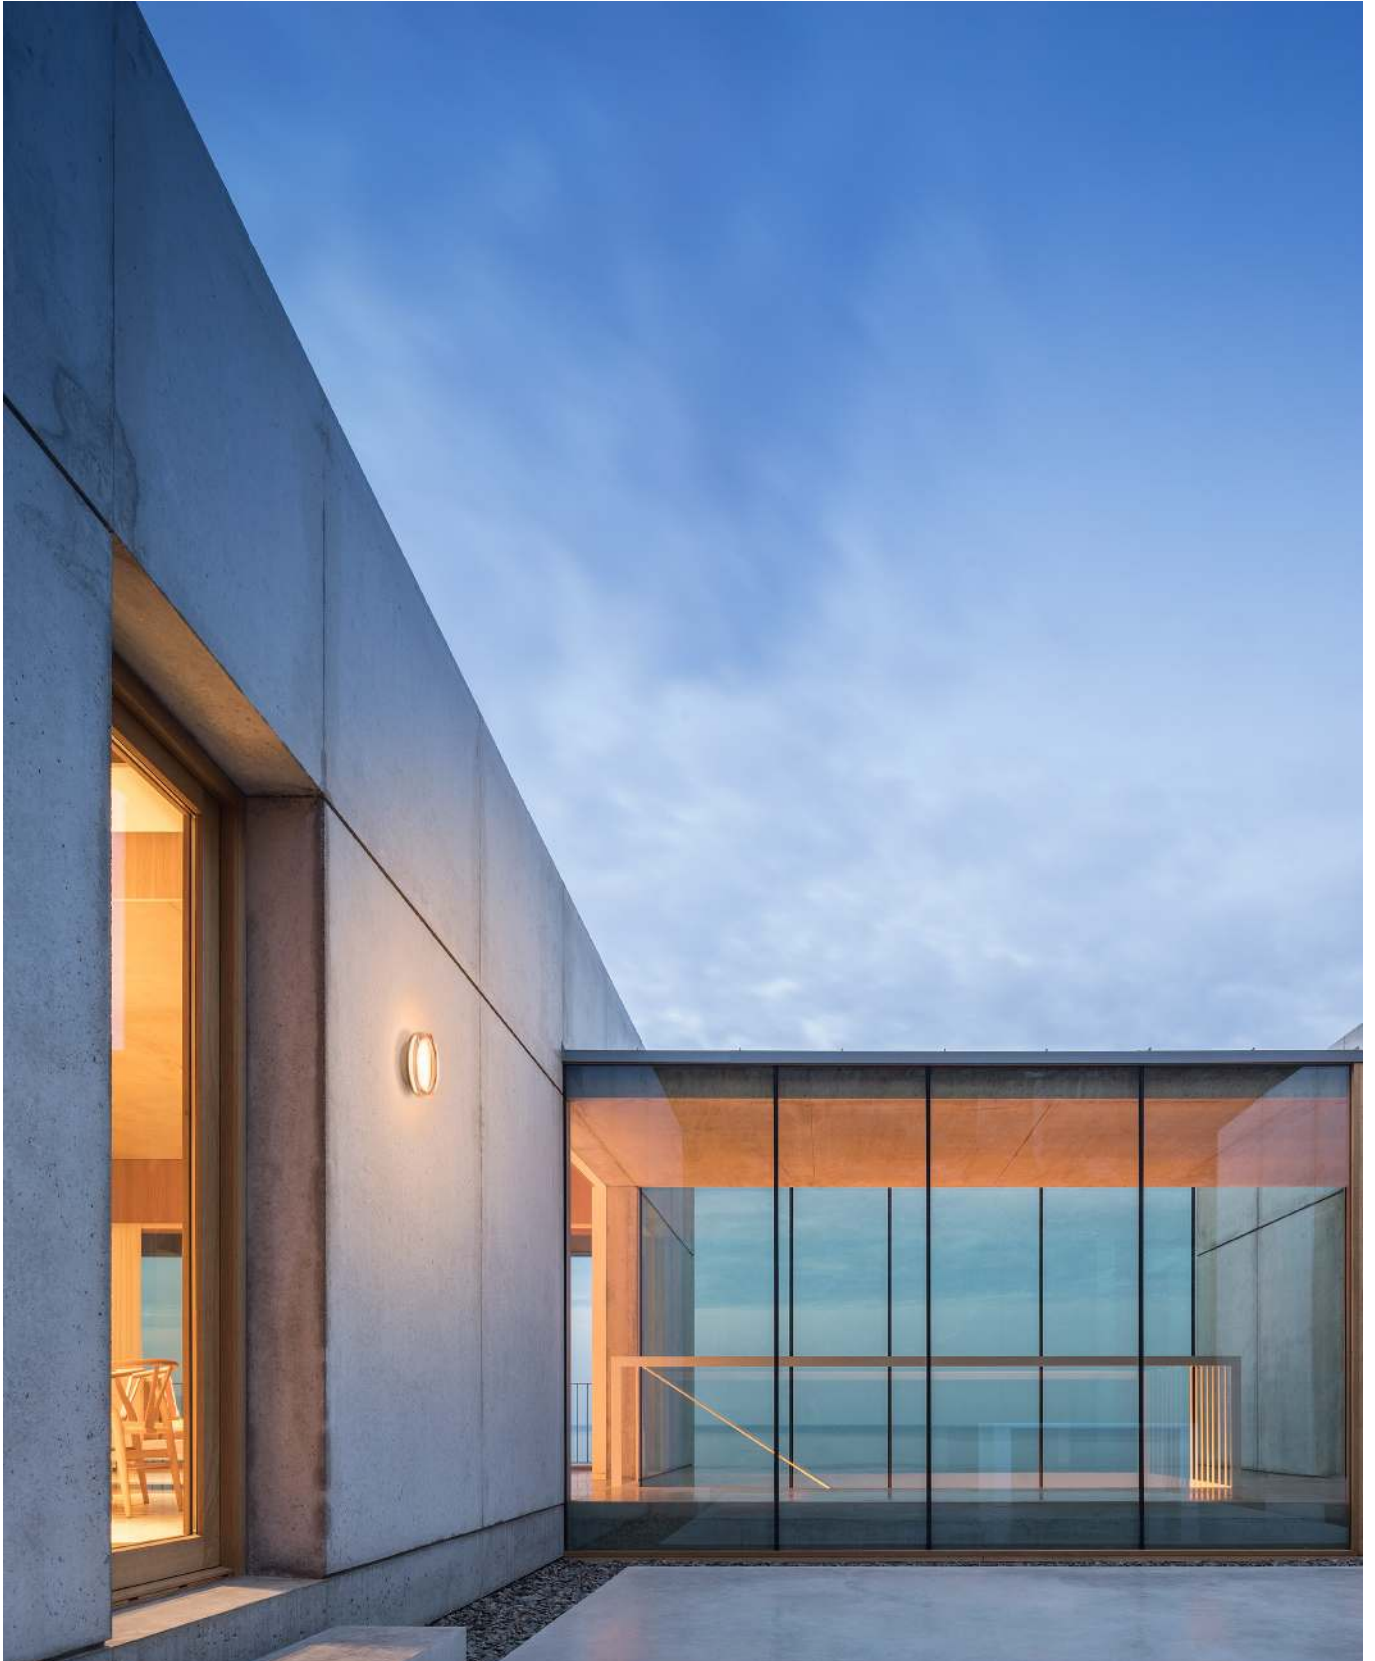


Dots Outdoor

Design by Martín Azúa

Diminutive, compact and easily installed, Dots Outdoor is the perfect solution for subtle outdoor illumination. Designed to nestle discreetly into the undergrowth of a garden or patio, Dots shines at night with a diffuse or focused glow from an invisible source.

Outdoor

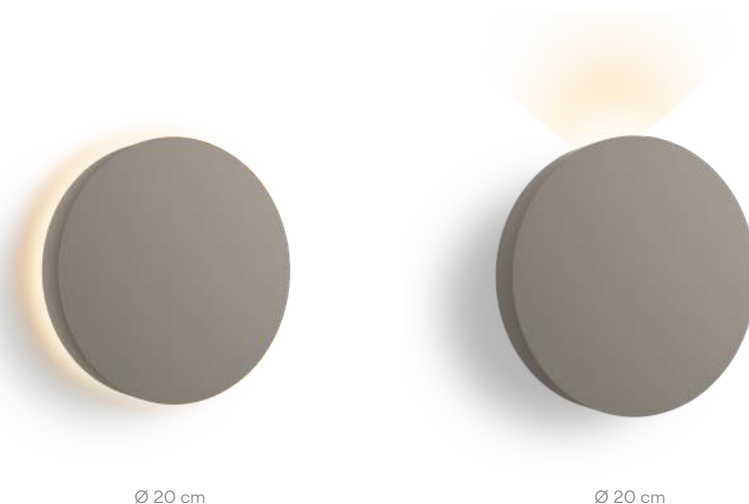

4684

Finishes

- 22/ _ _ Graphite Black
(NCS S 8000-N)
- 25/ _ _ Beige D1
(NCS S 4005-Y50R)
- 53/ _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 400 lm
- /3 _ 3500 K - 412 lm



CRI >90

Control

4684 _ _ / _ _

- _ _ / _ 0 On/ Off
- _ _ / _ 1 DALI-2
- _ _ / _ 3 1-10V
- _ _ / _ Z _ 30 Casambi
(Remote)

Materials

Body: Aluminium.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,5 W 500 mA
Constant Current 500 mA
100~240Vac 50/60Hz

Packaging

1 Box 0,305 x 0,305 x 0,105 m
Vol 0,00976 m³
Gross weight 1,6 Kg Net weight 2,0 Kg

Notes

4684 _ _ / _ 0: On/ Off **Bi-volt**

LED  **IP66** **CE** **UK** **ERL** 

4688

Finishes

- 22/ _ _ Graphite Black
(NCS S 8000-N)
- 25/ _ _ Beige D1
(NCS S 4005-Y50R)
- 53/ _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 500 lm
- /3 _ 3500 K - 515 lm



CRI >90

Control

4688 _ _ / _ _

- _ _ / _ 0 On/ Off
- _ _ / _ 1 DALI-2
- _ _ / _ 3 1-10V
- _ _ / _ Z _ 30 Casambi
(Remote)

Materials

Body: Aluminium.
Diffuser: Glass.

Light Source and electronics

1 x LED 5,75 W 500 mA
Constant Current 500 mA
100~277Vac 50/60Hz

Packaging

1 Box 0,305 x 0,305 x 0,105 m
Vol 0,00976 m³
Gross weight 1,7 Kg Net weight 2,1 Kg

Notes

4688 _ _ / _ 0: On/ Off **Bi-volt**

LED  **IP66** **CE** **UK** **ERL** 

Outdoor



4695
Ø 20 x 12 cm



4697
Ø 15 x 9 cm



4700
Ø 20 x 12 cm



4702
Ø 15 x 9 cm

4695

- Finishes**
- **22/** _ _ Graphite Black (NCS S 8000-N)
 - **25/** _ _ Beige D1 (NCS S 4005-Y50R)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1_ 2700 K - 750,2 lm
F →
CRI >90

Control

4695 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** _ **30** DALI-2 (Remote)
_ _ / _ **Z** _ **30** Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 7,8W 350 mA
Constant Current 350 mA
100~277V 50/60Hz

Packaging

1 Box 0,30 x 0,27 x 0,18 m
Vol 0,0146 m³
Gross weight 3,4 Kg Net weight 2,7 Kg

Notes

4695 _ _ / _ **0**: On/ Off **Multi-volt**
4695 _ _ / _ **1** _ **30**: DALI-2 **Bi-volt**

LED IP65 CE UK ENEC

4697

- Finishes**
- **22/** _ _ Graphite Black (NCS S 8000-N)
 - **25/** _ _ Beige D1 (NCS S 4005-Y50R)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1_ 2700 K - 375,9 lm
F →
CRI >90

Control

4697 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** _ **30** DALI-2 (Remote)
_ _ / _ **Z** _ **30** Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 4,6W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,24 x 0,20 x 0,13 m
Vol 0,0624 m³
Gross weight 1,9 Kg Net weight 1,5 Kg

Notes

4697 _ _ / _ **0**: On/ Off **Multi-volt**
4697 _ _ / _ **1** _ **30**: DALI-2 **Bi-volt**

LED IP65 CE UK ENEC

4700	Finishes 22/ _ _ Graphite Black (NCS S 8000-N) 25/ _ _ Beige D1 (NCS S 4005-Y50R) 53/ _ _ Green M1 (NCS S 6005-G80Y)
------	--



Meridiano

Design by Jordi Vilardell & Meritxell Vidal

Composed of a structure of corrugated steel rods, Meridiano radiates with a burst of light and shadow that enriches its surrounding environment. As a floor lamp, it doubles up as outdoor furniture; as a wall sconce, it animates a bare façade with a dynamic sunburst motif.

Outdoor



4710

Finishes
● **07/** __ Khaki
(RAL 7006)
● **58/** __ Off-white
(PANTONE
WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
D >90
/3 _ 3500 K - 1709 lm
C >80

Control
4710 __ / _ **0** On/ Off

Materials
Seat: PU- Polyurethane. Rods: Steel.
Arm: Steel. Diffuser: Glass.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,58 x 0,70 x 0,70 m
Vol 0,2842 m³
Gross weight 26 Kg Net weight 23 Kg

Notes
It can be connected with or without a plug.
Electric cable 2 m.

LED IP64 CE UK ENEC Bi-volt

4715

Finishes
● **07/** __ Khaki
(RAL 7006)
● **58/** __ Off-white
(PANTONE
WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
D >90
/3 _ 3500 K - 1709 lm
C >80

Control
4715 __ / _ **0** On/ Off

Materials
Seat: PU- Polyurethane. Rods: Steel.
Arm: Steel. Diffuser: Glass.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,43 x 0,94 x 0,94 m
Vol 0,38 m³
Gross weight 20,1 Kg Net weight 16,7 Kg

Notes
It can be connected with or without a plug.
Electric cable 2 m.

LED IP64 CE UK ENEC Bi-volt



4720

- Finishes**
- 07/ _ _ Khaki (RAL 7006)
 - 58/ _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D

CRI >90

/3 _ 3500 K - 1709 lm
C

CRI >80

Control

4720 _ _ / _ 0 On/ Off

Materials

Base: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,106 x 0,310 x 0,310 m
Vol 0,102 m³
Gross weight 1,5 Kg Net weight 1 Kg

LED IP65 CE UK ENEC Bi-volt

June


Design by Ana Mir + Emili Padrós (Emiliana Design Studio)

Inspired by traditional lanterns, June's moon-like spheres cast a warm, ambient glow, lending a touch of nostalgia to an outdoor space.

Outdoor



4780	Finishes ● 54/ _ _ Brown (Pantone Black U)	LED Colour Temperature /1 _ 2700 K - 95,5 lm F CRI >90	Control 4780 54 / 10 On/ Off
	Materials Diffuser: Opal blown glass. Tubes: Steel. Light Source and electronics 1 x LED 1 W 350 mA Constant Current 350 mA 100~240V 50/60Hz	Packaging 1 Box 1 x 0,4 x 0,4 m Vol 0,16 m³ Gross weight 5 Kg Net weight 3 Kg Notes Built-in.	LED ⓘ IP65 CE UK ENEC Bi-volt

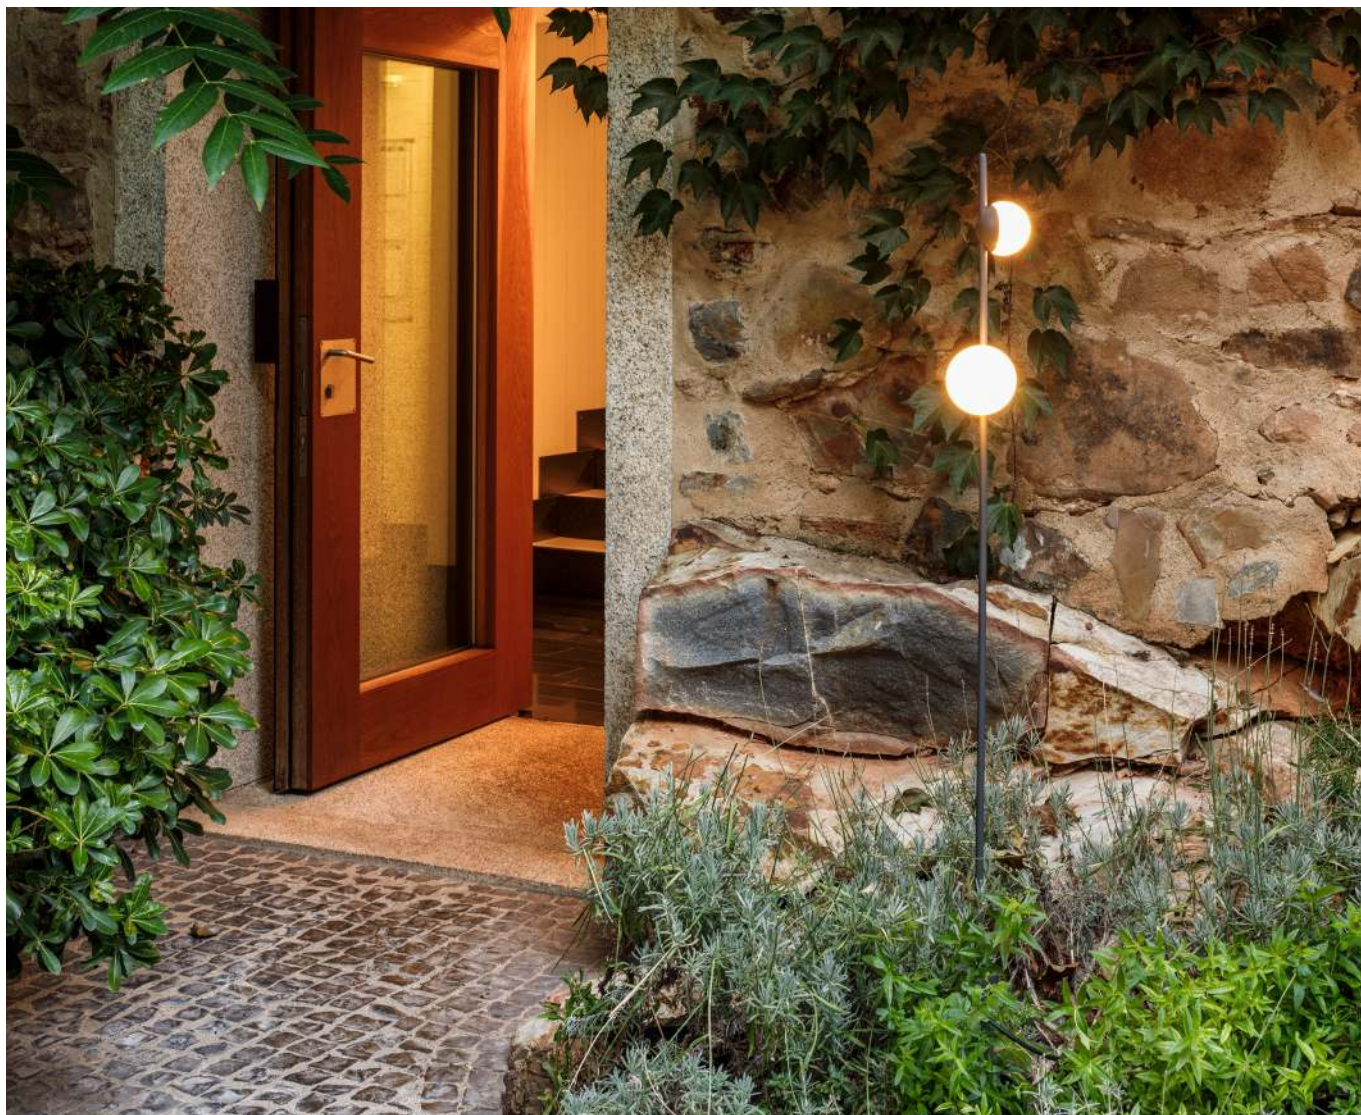

4785

Finishes
 ● 54/ _ _ Brown
 (Pantone Black U)

LED Colour Temperature
 /1 _ 2700 K - 190,9 lm
 F
 CRI >90

Control
 4785 54 / 10 On/ Off

Materials
 Diffuser: Opal blown glass.
 Tubes: Steel.
 Light Source and electronics
 2 x LED 1 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging
 1 Box 1,5 x 0,4 x 0,4 m
 Vol 0,24 m³
 Gross weight 6 Kg Net weight 4 Kg

Notes
 Built-in.


LED IP65 CE ENEC Bi-volt

Bamboo

Design by Antoni Arola & Enric Rodríguez

Bamboo's lean, natural form perfectly lends itself to an outdoor setting. Studded with LEDs, it seamlessly integrates with the landscape while adding a wash of light to walkways and common spaces.

Outdoor

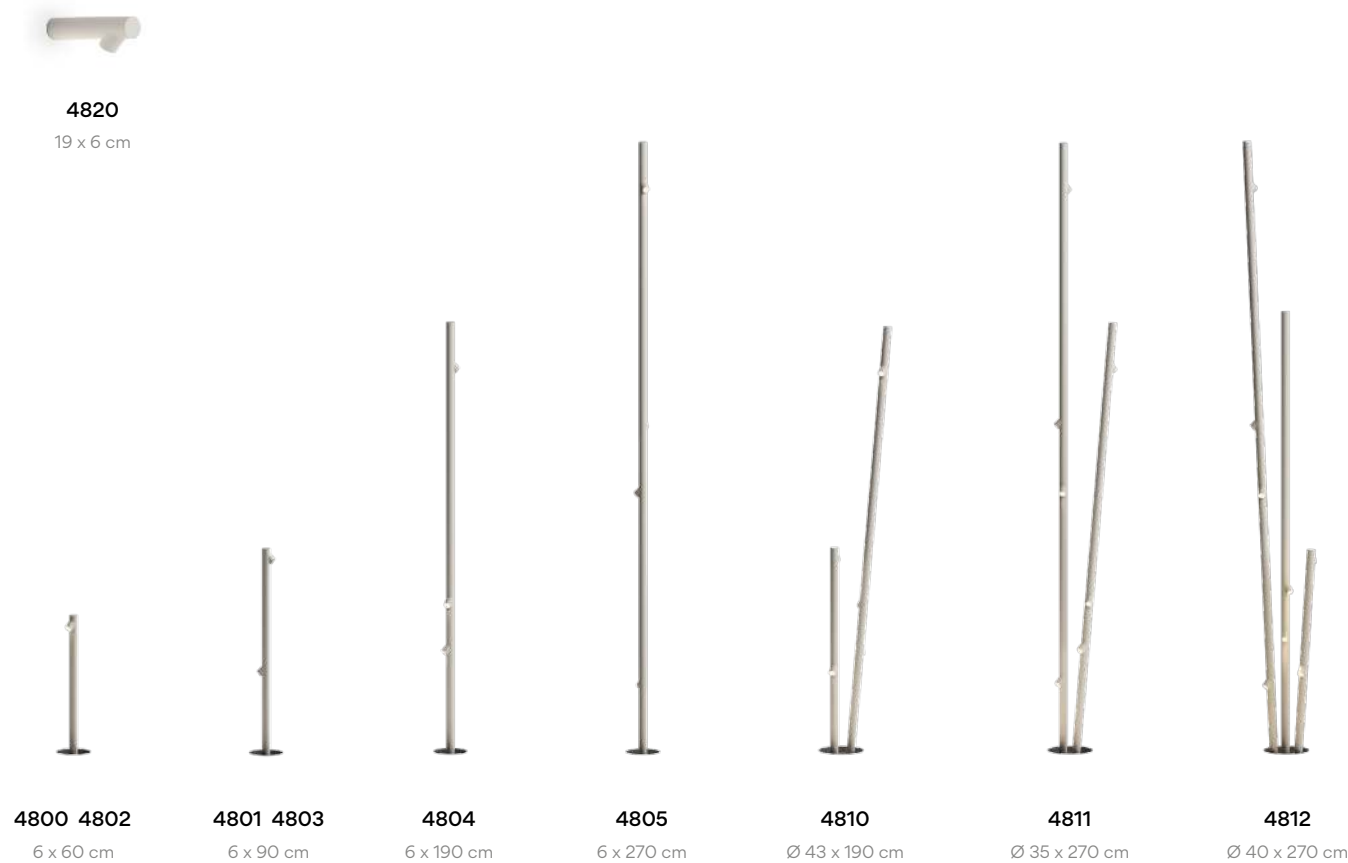

4800	Finishes		LED Colour Temperature		Control	
	 07/ __ Khaki (RAL 7006)		/1 _ 2700 K - 181,2 lm	4800 __ / _ 0 On/ Off		
	 54/ __ Oxide (RAL 8017)		/3 _ 3500 K - 181,2 lm			
	 58/ __ Off-white (PANTONE WARM GRAY 2U)		CRI >90			
Materials			Packaging			
Cane: PES + FG- Fiberglass. Diffuser: PMMA .			1 Box 0,125 x 0,125 x 1,3 m Vol 0,0203 m³ Gross weight 4 Kg Net weight 3,6 Kg			
Light Source and electronics			Notes			
1 x LED 2,1 W 700 mA Constant Current 700 mA 100~240V 50/60Hz			Surface			
			LED  IP66 CE UK ENEC  Bi-volt			

4801

Finishes	LED Colour Temperature
● 07/ _ _ Khaki (RAL 7006)	/1_ 2700 K - 362,4 lm
● 54/ _ _ Oxide (RAL 8017)	/3_ 3500 K - 362,4 lm
● 58/ _ _ Off-white (PANTONE WARM GRAY 2U)	CRI >90

Control
4801 _ _ / _ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA .

Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0470 m³
Gross weight 8,5 Kg Net weight 6 Kg

Notes
Surface
      

4802

Finishes	LED Colour Temperature
● 07/ _ _ Khaki (RAL 7006)	/1_ 2700 K - 181,2 lm
● 54/ _ _ Oxide (RAL 8017)	/3_ 3500 K - 181,2 lm
● 58/ _ _ Off-white (PANTONE WARM GRAY 2U)	CRI >90

Control
4802 _ _ / _ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA .

Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0480 m³
Gross weight 7 Kg Net weight 5,5 Kg

Notes
Built-in
      

4803

Finishes	LED Colour Temperature
● 07/ _ _ Khaki (RAL 7006)	/1_ 2700 K - 362,4 lm
● 54/ _ _ Oxide (RAL 8017)	/3_ 3500 K - 362,4 lm
● 58/ _ _ Off-white (PANTONE WARM GRAY 2U)	CRI >90

Control
4803 _ _ / _ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA .

Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0470 m³
Gross weight 8,5 Kg Net weight 5,8 Kg

Notes
Built-in
      

4804	Finishes 07/ _ _ Khaki (RAL 7006) 54/ _ _ Oxide (RAL 8017) 58/ _ _ Off-white (PANTONE WARM GRAY 2U)	LED Colour Temperature /1 _ 2700 K - 543,7 lm /3 _ 3500 K - 543,7 lm G CRI >90	Control 4804 _ _ / _ 0 On/ Off
	Materials Cane: PES + FG- Fiberglass. Diffuser: PMMA . Light Source and electronics 3 x LED 2,1 W 700 mA Constant Current 700 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,0480 m³ Gross weight 8 Kg Net weight 6,5 Kg Notes Built-in LED IP66 CE UK ERC Bi-volt	
4805	Finishes 07/ _ _ Khaki (RAL 7006) 54/ _ _ Oxide (RAL 8017) 58/ _ _ Off-white (PANTONE WARM GRAY 2U)	LED Colour Temperature /1 _ 2700 K - 724,9 lm /3 _ 3500 K - 724,9 lm G CRI >90	Control 4805 _ _ / _ 0 On/ Off
	Materials Cane: PES + FG- Fiberglass. Diffuser: PMMA . Light Source and electronics 4 x LED 2,1 W 700 mA Constant Current 700 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,0600 m³ Gross weight 9 Kg Net weight 7 Kg Notes Built-in LED IP66 CE UK ERC Bi-volt	
4810	Finishes 07/ _ _ Khaki (RAL 7006) 54/ _ _ Oxide (RAL 8017) 58/ _ _ Off-white (PANTONE WARM GRAY 2U)	LED Colour Temperature /1 _ 2700 K - 906,1 lm /3 _ 3500 K - 906,1 lm G CRI >90	Control 4810 _ _ / _ 0 On/ Off
	Materials Cane: PES + FG- Fiberglass. Diffuser: PMMA . Light Source and electronics 5 x LED 2,1 W 700 mA Constant Current 700 mA 100~240V 50/60Hz	Packaging 3 Boxes Total Vol 0,1388 m³ Gross weight 15 Kg Net weight 12,5 Kg Notes Built-in LED IP66 CE UK ERC Bi-volt	
4811	Finishes 07/ _ _ Khaki (RAL 7006) 54/ _ _ Oxide (RAL 8017) 58/ _ _ Off-white (PANTONE WARM GRAY 2U)	LED Colour Temperature /1 _ 2700 K - 1268,5 lm /3 _ 3500 K - 1268,5 lm G CRI >90	Control 4811 _ _ / _ 0 On/ Off
	Materials Cane: PES + FG- Fiberglass. Diffuser: PMMA . Light Source and electronics 7 x LED 2,1 W 700 mA Constant Current 700 mA 100~240V 50/60Hz	Packaging 3 Boxes Total Vol 1,660 m³ Gross weight 16,5 Kg Net weight 13 Kg Notes Built-in LED IP66 CE UK ERC Multi-volt	

4812

Finishes

- 07/ __ Khaki (RAL 7006)
- 54/ __ Oxide (RAL 8017)
- 58/ __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

/1_ 2700 K - 1631,0 lm
/3_ 3500 K - 1631,0 lm

CRI >90

Control

4812 __ / __ 0 On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

9 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

4 Boxes
Total Vol 0,1854 m³
Gross weight 21,6 Kg Net weight 19,44 Kg

Notes

Built-in

LED IP66 CE UK ENEC Multi-volt

4815

Finishes

- 18 Polymer concrete (NCS S 2002-B50G)

4815 18

Materials

Base: Polymer concrete.

Packaging

1 Box 0,40 x 0,50 x 0,50 m
Vol 0,1000 m³
Gross weight 39 Kg Net weight 35 Kg

Notes

Surface installation accessory.
For ref. 4810. 4811. 4812

4820

Finishes

- 07/ __ Khaki (RAL 7006)
- 54/ __ Oxide (RAL 8017)
- 58/ __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

/1_ 2700 K - 181,2 lm
/3_ 3500 K - 181,2 lm

CRI >90

Control

4820 __ / __

__ / __ 0 On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,10 x 0,10 m
Vol 0,0025 m³
Gross weight 2 Kg Net weight 1 Kg

Notes

Surface

LED IP66 CE UK ENEC Bi-volt

Duo

Design by Ramos & Bassols

Duo brings natural warmth to a space. Its gently curved form encases a supple wood-finished interior, lending a soothing sensibility.

Ceiling - Oak wood

4870

Ø 47,5 cm



4872

Ø 78,5 cm



4874

Ø 35 cm



4878

Ø 70 cm



4876

Ø 35 cm



4880

Ø 70 cm



4870

Finishes

- **18/** _ _ Graphite / Oak wood (Adapta RF9913WX)
- **58/** _ _ Cream / Oak wood (RAL 7044)
- **93/** _ _ White / Oak wood (RAL 9016)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F >80 CRI >80
Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm
G >80 CRI >90

Control

4870 _ _ / _ _
_ _ / _ **A** Static White +
Push; 1-10V; DALI-2
_ _ / _ **Z** Static White +
Casambi
_ _ / _ **81** Tunable White +
DALI-2 DT8
_ _ / _ **8Z** Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 500 mA
110-240V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,26 m
Vol 0,0815 m³
Gross weight 7 Kg Net weight 6 Kg

Notes

4870 _ _ / _ **A**: Static White +
Push; 1-10V; DALI-2
4870 _ _ / **81**: Tunable White + DALI-2 DT8

Bi-volt

Multi-volt

LED IP20 CE UK ENEC

4872

18/ __ Graphite / Oak wood (Adapta RF9913WX)

58/ __ Cream / Oak wood (RAL 7044)

93/ __ White / Oak wood (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 3959 lm

F

/3 _ 3500 K - 4133 lm

E

Tunable White

/8 _ (2200 K - 4000 K)

3138 lm - 4238 lm

G

 -

F

CRI >90

Control

4872 __ / __

__ / _ A Static White + Push; 1-10V; DALI-2

__ / _ Z Static White + Casambi

__ / _ 81 Tunable White + DALI-2 DT8

__ / _ 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 50 W 500 mA
Constant Current 750 mA
110~240V 50/60Hz

Packaging

1 Box 0,9 x 0,9 x 0,25 m
Vol 0,2025 m³
Gross weight 19 Kg Net weight 17 Kg

LED

IP20

CE

UK

EMC

4874

18/ __ Graphite / Oak wood (Adapta RF9913WX)

58/ __ Cream / Oak wood (RAL 7044)

93/ __ White / Oak wood (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 644 lm

/3 _ 3500 K - 632 lm

G

Tunable White

/8 _ (2200 K - 4000 K)

1244 lm - 1582 lm

G

 -

F

CRI >90

Control

4874 __ / __

__ / _ 1 Static White + DALI-2

__ / _ B Static White + Push; 1-10V

__ / _ Z Static White + Casambi

__ / _ 81 Tunable White + DALI-2 DT8

__ / _ 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

Notes

4874 __ / _ 1: Static White + DALI-2

Bi-volt

4874 __ / _ B: Static White + Push; 1-10V

Bi-volt

4874 __ / _ 81: Tunable White + DALI-2 DT8

Multi-volt



LED

IP20

CE

UK

EMC

4876	Finishes 18/ __ Graphite / Oak wood (Adapta RF9913WX) 58/ __ Cream / Oak wood (RAL 7044) 93/ __ White / Oak wood (RAL 9016) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature Static White /1 _ 2700 K - 644 lm /3 _ 3500 K - 632 lm  Tunable White /8 _ (2200 K - 4000 K) 1244 lm - 1582 lm  -  CRI >90	Control 4876 __ / __ __ / 1 Static White + DALI-2 __ / B Static White + Push; 1-10V __ / Z Static White + Casambi __ / 81 Tunable White + DALI-2 DT8 __ / 8Z Tunable White + Casambi
	Materials Diffuser: PC- Polycarbonate. Main Body: Aluminum. Inner structure: Oak wood. Light Source and electronics 1 x LED PLATE 12 W 350 mA Constant Current 350 mA 110~240V 50/60Hz	Packaging 1 Box 0,44 x 0,44 x 0,35 m Vol 0,0678 m³ Gross weight 5 Kg Net weight 4 Kg Notes 4876 __ / 1: Static White + DALI-2  4876 __ / B: Static White + Push; 1-10V  4876 __ / 81: Tunable White + DALI-2 DT8       	
4878	Finishes 18/ __ Graphite / Oak wood (Adapta RF9913WX) 58/ __ Cream / Oak wood (RAL 7044) 93/ __ White / Oak wood (RAL 9016) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature Static White /1 _ 2700 K - 2207 lm /3 _ 3500 K - 2304 lm  Tunable White /8 _ (2200 K - 4000 K) 1901 lm - 2461 lm  -  CRI >90	Control 4878 __ / __ __ / A Static White + Push; 1-10V; DALI-2 __ / Z Static White + Casambi __ / 81 Tunable White + DALI-2 DT8 __ / 8Z Tunable White + Casambi
	Materials Diffuser: PC- Polycarbonate. Main Body: Aluminum. Inner structure: Oak wood. Light Source and electronics 1 x LED PLATE 26,5 W 500 mA Constant Current 350 mA 110~240V 50/60Hz	Packaging 1 Box 0,79 x 0,79 x 0,59 m Vol 0,3682 m³ Gross weight 16 Kg Net weight 14 Kg Notes 4878 __ / 81: Tunable White + DALI-2 DT8       	
4880	Finishes 18/ __ Graphite / Oak wood (Adapta RF9913WX) 58/ __ Cream / Oak wood (RAL 7044) 93/ __ White / Oak wood (RAL 9016) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature Static White /1 _ 2700 K - 2207 lm /3 _ 3500 K - 2304 lm  Tunable White /8 _ (2200 K - 4000 K) 1901 lm - 2461 lm  -  CRI >90	Control 4880 __ / __ __ / A Static White + Push; 1-10V; DALI-2 __ / Z Static White + Casambi __ / 81 Tunable White + DALI-2 DT8 __ / 8Z Tunable White + Casambi
	Materials Diffuser: PC- Polycarbonate. Main Body: Aluminum. Inner structure: Oak wood. Light Source and electronics 1 x LED PLATE 26,5 W 500 mA Constant Current 350 mA 110~240V 50/60Hz	Packaging 1 Box 0,79 x 0,79 x 0,59 m Vol 0,3682 m³ Gross weight 16 Kg Net weight 14 Kg Notes 4880 __ / 81: Tunable White + DALI-2 DT8       	

Ceiling - American walnut



4882

Finishes

- 18/ _ _ Graphite / American walnut (Adapta RF9913WX)
- 58/ _ _ Cream / American walnut (RAL 7044)
- 93/ _ _ White / American walnut (RAL 9016)

Finish customization
(Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F
CRI >90

Control

4882 _ _ / _ _

_ _ / _ A Static White +
Push; 1-10V; DALI-2

_ _ / _ Z Static White +
Casambi

_ _ / _ 81 Tunable White +
DALI-2 DT8

_ _ / _ 8Z Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: American walnut.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 500 mA
110-240V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,26 m
Vol 0,0815 m³
Gross weight 7 Kg Net weight 6 Kg

LED IP20 CE UK ENEC

4883

18/ _ _ Graphite / American walnut (Adapta RF9913WX)

58/ _ _ Cream / American walnut (RAL 7044)

93/ _ _ White / American walnut (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 3959 lm

F

/3 _ 3500 K - 4133 lm

E

Tunable White

/8 _ (2200 K - 4000 K)

3138 lm - 4238 lm

G - F

CRI >90

Control

4883 _ _ / _ _

/ _ A Static White + Push; 1-10V; DALI-2

/ _ Z Static White + Casambi

/ _ 81 Tunable White + DALI-2 DT8

/ _ 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: American walnut.

Light Source and electronics

1 x LED PLATE 50 W 500 mA
Constant Current 750 mA
110~240V 50/60Hz

Packaging

1 Box 0,9 x 0,9 x 0,25 m
Vol 0,2025 m³
Gross weight 19 Kg Net weight 17 Kg

LED

IP20

CE

UK

ENEC

4884

18/ _ _ Graphite / American walnut (Adapta RF9913WX)

58/ _ _ Cream / American walnut (RAL 7044)

93/ _ _ White / American walnut (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 644 lm

/3 _ 3500 K - 632 lm

G

Tunable White

/8 _ (2200 K - 4000 K)

1244 lm - 1582 lm

G - F

CRI >90

Control

4884 _ _ / _ _

/ _ 1 Static White + DALI-2

/ _ B Static White + Push; 1-10V

/ _ Z Static White + Casambi

/ _ 81 Tunable White + DALI-2 DT8

/ _ 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: American walnut.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

LED

IP20

CE

UK

ENEC

4885

18/ _ _ Graphite / American walnut (Adapta RF9913WX)

58/ _ _ Cream / American walnut (RAL 7044)

93/ _ _ White / American walnut (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 644 lm

/3 _ 3500 K - 632 lm

G

Tunable White

/8 _ (2200 K - 4000 K)

1244 lm - 1582 lm

G - F

CRI >90

Control

4885 _ _ / _ _

/ _ 1 Static White + DALI-2

/ _ B Static White + Push; 1-10V

/ _ Z Static White + Casambi

/ _ 81 Tunable White + DALI-2 DT8

/ _ 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: American walnut.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

LED

IP20

CE

UK

ENEC

4886

Finishes

- 18/ _ _ Graphite / American walnut (Adapta RF9913WX)
- 58/ _ _ Cream / American walnut (RAL 7044)
- 93/ _ _ White / American walnut (RAL 9016)

Finish customization
(Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F

CRI >90

Control

4886 _ _ / _ _

_ _ / _ **A** Static White +
Push; 1-10V; DALI-2

_ _ / _ **Z** Static White +
Casambi

_ _ / _ **81** Tunable White +
DALI-2 DT8

_ _ / _ **8Z** Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: American walnut.

Light Source and electronics
1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

LED IP20 CE UK ENE

4887

Finishes

- 18/ _ _ Graphite / American walnut (Adapta RF9913WX)
- 58/ _ _ Cream / American walnut (RAL 7044)
- 93/ _ _ White / American walnut (RAL 9016)

Finish customization
(Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F

CRI >90

Control

4887 _ _ / _ _

_ _ / _ **A** Static White +
Push; 1-10V; DALI-2

_ _ / _ **Z** Static White +
Casambi

_ _ / _ **81** Tunable White +
DALI-2 DT8

_ _ / _ **8Z** Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: American walnut.

Light Source and electronics
1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

LED IP20 CE UK ENE



Duo Petra

Design by Ramos & Bassols

Duo Petra's slate veneer lends a timeless elegance to the collection. The ceiling lamp's gently curved form encases a velvety slate-finished interior for a sophisticated, natural aesthetic.

Ceiling

4871

Ø 47,5 cm



4873

Ø 78,5 cm



4875

Ø 35 cm



4877

Ø 35 cm



4879

Ø 70 cm



4881

Ø 70 cm



4871

Finishes

- **18/** _ _ Graphite / Slate (Adapta RF9913WX)
- **58/** _ _ Cream / Slate (RAL 7044)
- **93/** _ _ White / Slate (RAL 9016)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity 10
units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F

CRI >90

Control

4871 _ _ / _ _

_ _ / _ **A** Static White +
Push; 1-10V; DALI-2

_ _ / _ **Z** Static White +
Casambi

_ _ / _ **81** Tunable White +
DALI-2 DT8

_ _ / _ **8Z** Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,26 m
Vol 0,0815 m³
Gross weight 7 Kg Net weight 6 Kg

Notes

4871 _ _ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

LED IP20 CE UK ENE

4873

Finishes

- **18/** _ _ Graphite / Slate (Adapta RF9913WX)
- **58/** _ _ Cream / Slate (RAL 7044)
- **93/** _ _ White / Slate (RAL 9016)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity 10
units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 3959 lm
F

/3 _ 3500 K - 4133 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
3138 lm - 4238 lm
G - F

CRI >90

Control

4873 _ _ / _ _

_ _ / _ **A** Static White +
Push; 1-10V; DALI-2

_ _ / _ **Z** Static White +
Casambi

_ _ / _ **81** Tunable White +
DALI-2 DT8

_ _ / _ **8Z** Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics

1 x LED PLATE 50 W 500 mA
Constant Current 750 mA
110~240V 50/60Hz

Packaging

1 Box 0,9 x 0,9 x 0,25 m
Vol 0,2025 m³
Gross weight 19 Kg Net weight 17 Kg

LED IP20 CE UK ENE

4875

Finishes

- **18/** _ _ Graphite / Slate (Adapta RF9913WX)
- **58/** _ _ Cream / Slate (RAL 7044)
- **93/** _ _ White / Slate (RAL 9016)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity 10
units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 644 lm
/3 _ 3500 K - 632 lm
G

Tunable White
/8 _ (2200 K - 4000 K)
1244 lm - 1582 lm
G - F

CRI >90

Control

4875 _ _ / _ _

_ _ / **11** Static White + DALI-2

_ _ / **1B** Static White + Push; 1-10V

_ _ / **1Z** Static White + Casambi

_ _ / **81** Tunable White +
DALI-2 DT8

_ _ / **8Z** Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

Notes

4875 _ _ / 11: Static White + DALI-2 **Bi-volt**

4875 _ _ / 1B: Static White + Push; 1-10V **Bi-volt**

4875 _ _ / 81: Tunable White + DALI-2 DT8 **Multi-volt**

LED IP20 CE UK ENE

4877

Finishes

- **18/** __ _ Graphite / Slate (Adapta RF9913WX)
 - **58/** __ _ Cream / Slate (RAL 7044)
 - **93/** __ _ White / Slate (RAL 9016)
- Finish customization
(Available options:
Vibia colour palette.
Minimum quantity 10
units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 644 lm
/3 _ 3500 K - 632 lm


Tunable White
/8 _ (2200 K - 4000 K)
1244 lm - 1582 lm


CRI >90

Control

4877 __ / __

- __ / **1** Static White + DALI-2
- __ / **B** Static White + Push; 1-10V
- __ / **Z** Static White + Casambi
- __ / **81** Tunable White + DALI-2 DT8
- __ / **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

Notes

4877 __ / 1: Static White + DALI-2 Bi-volt
4877 __ / B: Static White + Push; 1-10V Bi-volt
4877 __ / 81: Tunable White + DALI-2 DT8 Multi-volt

4879

Finishes

- **18/** __ _ Graphite / Slate (Adapta RF9913WX)
 - **58/** __ _ Cream / Slate (RAL 7044)
 - **93/** __ _ White / Slate (RAL 9016)
- Finish customization
(Available options:
Vibia colour palette.
Minimum quantity 10
units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm


Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm


CRI >90

Control

4879 __ / __

- __ / **A** Static White + Push; 1-10V; DALI-2
- __ / **Z** Static White + Casambi
- __ / **81** Tunable White + DALI-2 DT8
- __ / **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

Notes

4879 __ / 81: Tunable White + DALI-2 DT8 Multi-volt

4881

Finishes

- **18/** __ _ Graphite / Slate (Adapta RF9913WX)
 - **58/** __ _ Cream / Slate (RAL 7044)
 - **93/** __ _ White / Slate (RAL 9016)
- Finish customization
(Available options:
Vibia colour palette.
Minimum quantity 10
units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm


Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm


CRI >90

Control

4881 __ / __

- __ / **A** Static White + Push; 1-10V; DALI-2
- __ / **Z** Static White + Casambi
- __ / **81** Tunable White + DALI-2 DT8
- __ / **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

Notes

4881 __ / 81: Tunable White + DALI-2 DT8 Multi-volt



Warm

Design by Ramos & Bassols

A contemporary take on a timeless design, Warm features a generous drum shade in a muted colour palette for a refined touch.

Table



4895 4896

Ø 19 x 41 cm



4900 4901

Ø 32,4 x 59 cm

4895

Finishes

- 10 White (NCS S 0300-N)

LED 2700 K 470 lm

4895 10 / 00

Materials

Shade: Screen.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics
3 x LED G9 230V 4,2 W

Packaging

2 Boxes
Total Vol 0,0390 m³
Gross weight 2,9 Kg Net weight 1,3 Kg

Notes

On/ Off switch on the cable.
Electric cable 2 m



4896

Finishes

- 10 White (NCS S 0300-N)
- 25 Beige D1 (NCS S 4005-Y50R)
- 28 Brown M1 (NCS S 4020-Y60R)
- 56 Green D1 (NCS S 7010-G30Y)

LED 2700 K 470 lm

4896 _ _ / 00

Finish customization

(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Shade: Aluminium.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics
3 x LED G9 230V 4,2 W

Packaging

2 Boxes
Total Vol 0,0390 m³
Gross weight 2,9 Kg Net weight 2 Kg

Notes

On/ Off switch on the cable.
Electric cable 2 m





4900

Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

4900 10 / 00

Materials

Shade: Screen.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics
3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,2153 m³
Gross weight 4,3 Kg Net weight 3,8 Kg

Notes

On/ Off switch on the cable.
Electric cable 2 m



4901

Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)

LED 2700 K 1520 lm

4901 __ / 00

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Shade: Aluminum.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics
3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,2153 m³
Gross weight 4,8 Kg Net weight 4,3 Kg

Notes

On/ Off switch on the cable.
Electric cable 2 m



Warm

Floor



4905 4906

Ø 32,4 x 150 cm

4905

Finishes

10 White

(NCS S 0300-N)

LED 2700 K 1520 lm

4905 10 / 00

Materials

Shade: Screen.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,3426 m³
Gross weight 10,2 Kg Net weight 6,3 Kg

Notes

On/ Off switch on the cable.
Electric cable 2,5 m

IP20

CE

UK

EAC

4906

Finishes

10 White

(NCS S 0300-N)

25 Beige D1

(NCS S 4005-Y50R)

28 Brown M1

(NCS S 4020-Y60R)

56 Green D1

(NCS S 7010-G30Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED 2700 K 1520 lm

4906 _ _ / 00

Materials

Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,3426 m³
Gross weight 10,7 Kg Net weight 6,8 Kg

Notes

On/ Off switch on the cable.
Electric cable 2,5 m

IP20

CE

UK

EAC

Pendant



4925 4926

Ø 62 cm

4925

Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

4925 10 / 00

Materials

Shade: Screen.
Canopy: Steel.
Diffuser: PMMA.

Light Source and electronics

4 x LED E27 230V 12 W

Packaging

1 Box 0,68 x 0,68 x 0,39 m
Vol 0,18 m³
Gross weight 7,7 Kg Net weight 3,9 Kg

Notes

Extra cable length.

⌚ IP20 CE UK ENE

4926

Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)

LED 2700 K 1520 lm

4926 _ / 00

Finish customization

(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Shade: Aluminum.
Canopy: Steel.
Diffuser: PMMA.

Light Source and electronics

4 x LED E27 230V 12 W

Packaging

1 Box 0,77 x 0,77 x 0,50 m
Vol 0,2965 m³
Gross weight 8,9 Kg Net weight 5,1 Kg

Notes

Extra cable length.

⌚ IP20 CE UK ENE

Ghost

Design by Arik Levy

A study in contrasts, the Ghost collection embodies both spirit and materiality, discretion and presence. A contemporary reimagining of the grand lights that once graced entryways and living areas, its sensuous form radiates with a warm, welcoming glow.

Table



4960

Ø 47,5 x 112 cm



4965

Ø 47,5 x 92 cm



4970

Ø 47,5 x 88 cm

Dimming and installation options



 **PUSH**

/15: Push-dimming model equipped with two buttons, one for each diffuser. A quick push turns the light on and off, a longer presson dims the light.

 **DALI**
 **1-10V**

 **CASAMBI**
Optional plug included

Dimming and installation options: The driver of the DALI-2, 1-10V and Casambi versions is enclosed in a box at the end of the cable.

4960

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 5432,0 lm
ID 
CRI >90

Control
4960 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 5 Push
(with or without memory)
_ _ / _ Z Casambi

Materials

Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics

2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,6051 m³
Gross weight 25,7 Kg Net weight 22,7 Kg

Notes

4960 _ _ / _ 1: DALI-2 
4960 _ _ / _ 3: 1-10V 
4960 _ _ / _ 5: Push 

A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.
Electric cable 2 m.

  IP20     Dimmer

4965

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 5432,0 lm
ID 
CRI >90

Control
4965 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 5 Push
(with or without memory)
_ _ / _ Z Casambi

Materials

Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics

2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,6051 m³
Gross weight 20,6 Kg Net weight 17,6 Kg

Notes

4965 _ _ / _ 1: DALI-2 
4965 _ _ / _ 3: 1-10V 
4965 _ _ / _ 5: Push 

A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.
Electric cable 2 m.

  IP20     Dimmer

4970

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 5432,0 lm
ID 
CRI >90

Control
4970 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 5 Push
(with or without memory)
_ _ / _ Z Casambi

Materials

Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics

2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,6051 m³
Gross weight 21,7 Kg Net weight 18,7 Kg

Notes

4970 _ _ / _ 1: DALI-2 
4970 _ _ / _ 3: 1-10V 
4970 _ _ / _ 5: Push 

A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.
Electric cable 2 m.

  IP20     Dimmer

Pendant



4987

Ø 47,5 cm

4987	Finishes	LED Colour Temperature	Control
	● 11/ _ _ Black (NCS S 8500-N)	/1_ 2700 K - 4826,7 lm D	4987 _ _ / _ _ _ _ / _ A Push; -10V; DALI-2 _ _ / _ Z Casambi
Materials		Packaging	
Diffuser: Opal Glass. Metal parts: Aluminum.		1 Box 0,61 x 0,62 x 0,80 m Vol 0,3026 m³ Gross weight 13,9 Kg Net weight 12,4 Kg Extra cable length.	
Light Source and electronics		LED	
1 x LED 37,2 W 1050 mA Constant Current 1050 mA 100~240V 50/60Hz		Dimmer	



Balance

Design by Jordi Vilardell

Balance features a classic drum shade, elegantly cantilevered from its column to provide a general ambient lighting effect or a more focused reading light.

Floor



5189 5190

260 x 210 cm



5191 5192

215 x 210 cm



5189	Finishes ● 18 Graphite (RAL 7016) ● 30 Nickel (Metallic finish)	LED 2700K 1520 lm Dim	Control 5189 _ _ / 05 Push
	Materials Vertical tube: Aluminum. Base: Steel. Arm: Stainless steel. Shade: Aluminum. Light Source and electronics 3 x E27 230V 12 W		Packaging 3 Boxes Total Vol 0,3472 m³ Gross weight 53,8 Kg Net weight 49,5 Kg Notes Dimmer on the cable. 3 m     
5190	Finishes ● 18 Graphite (RAL 7016) ● 30 Nickel (Metallic finish)	LED 2700K 1520 lm Dim	Control 5190 _ _ / 05 Push
	Materials Vertical tube: Aluminum. Base: Steel. Arm: Stainless steel. Shade: Parchment paper. Light Source and electronics 3 x E27 230V 12 W		Packaging 3 Boxes Total Vol 0,3472 m³ Gross weight 53,8 Kg Net weight 49,5 Kg Notes Dimmer on the cable. 3 m     
5191	Finishes ● 18 Graphite (RAL 7016) ● 30 Nickel (Metallic finish)	LED 2700K 1520 lm Dim	Control 5191 _ _ / 05 Push
	Materials Vertical tube: Aluminum. Base: Steel. Arm: Stainless steel. Shade: Parchment paper. Light Source and electronics 3 x E27 230V 12 W		Packaging 3 Boxes Total Vol 0,3472 m³ Gross weight 53,8 Kg Net weight 49,1 Kg Notes Dimmer on the cable. 3 m     
5192	Finishes ● 18 Graphite (RAL 7016) ● 30 Nickel (Metallic finish)	LED 2700K 1520 lm Dim	Control 5192 _ _ / 05 Push
	Materials Vertical tube: Aluminum. Base: Steel. Arm: Stainless steel. Shade: Aluminum. Light Source and electronics 3 x E27 230V 12 W		Packaging 3 Boxes Total Vol 0,3472 m³ Gross weight 53,8 Kg Net weight 49,1 Kg Notes Dimmer on the cable. 3 m     

Puck

Design by Jordi Vilardell

Inspired by the classic circle silhouette, Puck panel light's simple, spherical forms can be superimposed on one another, lending sensibility overhead. Crafted of premium, opal triplex blown glass, it casts a warm glow.

Ceiling Wall



5410

24,4 x 6,6 cm



5412

27,2 x 7,7 cm



5425 5427

31,8 x 24,2 cm



5430 5432


46,7 x 38 cm



5435 5437

56,8 x 49,2cm

5410	Finishes 03 White (RAL 9016)	LED Colour Temperature 2700 K 470 lm	5410 03 / 00 On/ Off
	Materials Canopy: Aluminum. Diffuser: Blown-glass. Light Source and electronics 1 x LED G9 4,2 W	Packaging 1 Box 0,37 x 0,37 x 0,23 m Vol 0,0315 m³ Gross weight 0,95 Kg Net weight 0,7 Kg IP20 CE UK ENE	
5412	Finishes 03/ _ _ White (RAL 9016)	LED Colour Temperature /1 _ 2700 K - 880 lm E CRI >90	Control 5412 03 / 10 On/ Off
	Materials Canopy: Aluminum. Diffuser: Blown-glass. Light Source and electronics 1 x LED PLATE 7,6 W 350 mA Constant Current 350 mA 100~240V 50/60Hz	Packaging 1 Box 0,37 x 0,37 x 0,23 m Vol 0,0315 m³ Gross weight 0,95 Kg Net weight 0,7 Kg IP20 CE UK ENE Bi-volt	
5425	Finishes 03 White (RAL 9016)	LED Colour Temperature 2700 K - 470 lm	5425 03 / 00 On/ Off
	Materials Canopy: Aluminum. Diffuser: Blown-glass. Light Source and electronics 2 x LED G9 4,2 W	Packaging 1 Box 0,25 x 0,42 x 0,42 m Vol 0,0441 m³ Gross weight 2,26 Kg Net weight 1,08 Kg Notes All version require only one electrical connection IP20 CE UK ENE	
5427	Finishes 03/ _ _ White (RAL 9016)	LED Colour Temperature /1 _ 2700 K - 831 lm D /3 _ 3500 K - 878 lm G CRI >90	Control 5427 03 / _ 0 On/ Off
	Materials Canopy: Aluminum. Diffuser: Blown-glass. Light Source and electronics 2 x LED PLATE 3,2 W 350 mA Constant Current 350 mA 100~240V 50/60Hz	Packaging 1 Box 0,25 x 0,42 x 0,42 m Vol 0,0441 m³ Gross weight 2,26 Kg Net weight 1,08 Kg Notes All version require only one electrical connection IP20 CE UK ENE Bi-volt	

5430	Finishes ● 03 White (RAL 9016)	LED Colour Temperature 2700 K 470 lm	5430 03 / 00 On/ Off
	Materials Canopy: Aluminum. Diffuser: Blown-glass. Light Source and electronics 2 x LED G9 4,2 W	Packaging 1 Box 0,27 x 0,60 x 0,60 m Vol 0,0972 m³ Gross weight 4,2 Kg Net weight 2,15 Kg Notes All version require only one electrical connection 	
5432	Finishes ● 03/ _ _ White (RAL 9016)	LED Colour Temperature /1_ 2700 K - 1760 lm  CRI >90	Control 5432 03 / 10 On/ Off
	Materials Canopy: Aluminum. Diffuser: Blown-glass. Light Source and electronics 2 x LED PLATE 7,6 W 350 mA Constant Current 350 mA 100~240V 50/60Hz	Packaging 1 Box 0,27 x 0,60 x 0,60 m Vol 0,0972 m³ Gross weight 4,2 Kg Net weight 2,15 Kg Notes All version require only one electrical connection 	
5435	Finishes ● 03 White (RAL 9016)	LED Colour Temperature 2700 K 470 lm	5435 03 / 00 On/ Off
	Materials Canopy: Aluminum. Diffuser: Blown-glass. Light Source and electronics 3 x LED G9 4,2 W	Packaging 2 Boxes Total Vol 0,0780 m³ Gross weight 7,5 Kg Net weight 4,1 Kg Notes All version require only one electrical connection 	
5437	Finishes ● 03/ _ _ White (RAL 9016)	LED Colour Temperature /1_ 2700 K - 2640 lm  CRI >90	Control 5437 03 / 10 On/ Off
	Materials Canopy: Aluminum. Diffuser: Blown-glass. Light Source and electronics 3 x LED PLATE 7,6 W 350 mA Constant Current 350 mA 100~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,0780 m³ Gross weight 7,5 Kg Net weight 4,1 Kg Notes All version require only one electrical connection 	



Puck Wall Art

Design by Jordi Vilardell

Puck Wall Art combines two circular wall lights of different sizes and colours, superimposed on top of one another, and combining to create a set of highly dynamic, sculptural compositions. The collection provides ambient indirect light and only requires a single electrical connection.

Wall



5470

Ø 30 cm



5471

Ø 40 cm



5472

Ø 45 cm



5474

Ø 46 cm



5476

Ø 60 cm



5480

58 x 58 x 6 cm



5481

69 x 69 x 9 cm



5485

68 x 68 x 9 cm



5487

87 x 87 x 9 cm



5486


87 x 87 x 11 cm



5491

103 x 84 x 11 cm

Each project is unique.
Personalise your own
Puck Wall Art composition
quick and easy.

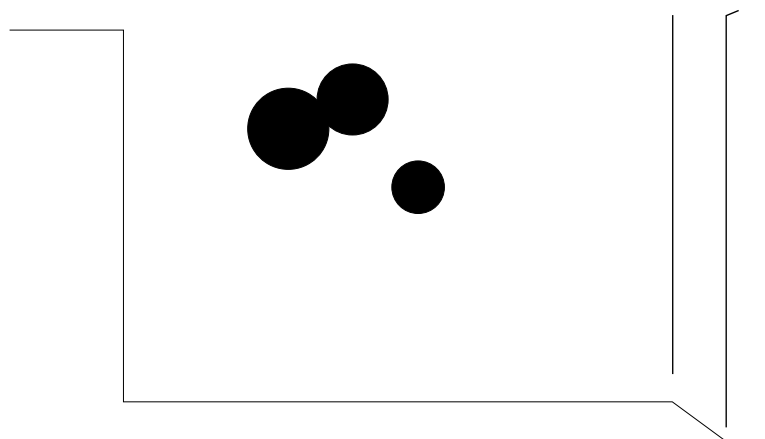

5470

Finishes 15/ __ Grey L2 (NCS S 2500-N) 21/ __ Black Grey (NCS S 7000-N) 28/ __ Brown M1 (NCS S 4020-Y60R)	LED Colour Temperature /1 _ 2700 K - 952 lm /3 _ 3500 K - 1017 lm  CRI >90	Control 5470 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi
Finishes 76/ __ Grey Felt L1 77/ __ Grey Felt D1	LED Colour Temperature /1 _ 2700 K - 952 lm /3 _ 3500 K - 1017 lm  CRI >90	Control 5470 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi
Materials Diffuser: PC- Polycarbonate. Shade: ABS. Wall support: Aluminum. Light Source and electronics 1 x LED STRIP 8,4 W 700 mA Constant Current 700 mA 220~240V 50/60Hz	Packaging 1 Box 0,34 x 0,34 x 0,23 m Vol 0,0266 m ³ Gross weight 2,6 Kg Net weight 1,6 Kg	Notes 5470 __ / _ 1: DALI-2  5470 __ / _ 3: 1-10V  A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system       

5471	Finishes 15/ __ Grey L2 (NCS S 2500-N) 21/ __ Black Grey (NCS S 7000-N)
------	---


5474

Finishes	LED Colour Temperature	Control
15/ __ Grey L2 (NCS S 2500-N) 21/ __ Black Grey (NCS S 7000-N) 28/ __ Brown M1 (NCS S 4020-Y60R)	/1 _ 2700 K - 952 lm /3 _ 3500 K - 1017 lm  CRI >90	5474 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi

Finishes	LED Colour Temperature	Control
71/ __ Grey Felt L1 & Grey Felt D1 76/ __ Grey Felt L1	/1 _ 2700 K - 952 lm /3 _ 3500 K - 1017 lm  CRI >90	5474 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi

Materials	Packaging
Diffuser: PC- Polycarbonate. Shade: ABS. Wall support: Aluminum. Ring: Steel.	1 Box 0,51 x 0,51 x 0,26 m Vol 0,0676 m³ Gross weight 4,75 Kg Net weight 2,25 Kg
Light Source and electronics	Notes
1 x LED STRIP 8,4 W 700 mA Constant Current 700 mA 220~240V 50/60Hz	5474 __ / _ 1: DALI-2  5474 __ / _ 3: 1-10V  5474 __ / _ 5: Push 

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system




5476

Finishes	LED Colour Temperature	Control
15/ __ Grey L2 (NCS S 2500-N) 21/ __ Black Grey (NCS S 7000-N) 28/ __ Brown M1 (NCS S 4020-Y60R)	/1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm  CRI >90	5476 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi

Finishes	LED Colour Temperature	Control
71/ __ Grey Felt L1 & Grey Felt D1 76/ __ Grey Felt L1	/1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm  CRI >90	5476 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi

Materials	Packaging
Diffuser: PC- Polycarbonate. Shade: ABS. Wall support: Aluminum. Ring: Steel.	1 Box 0,66 x 0,66 x 0,235 m Vol 0,1024 m³ Gross weight 6,3 Kg Net weight 2,9 Kg
Light Source and electronics	Notes
1 x LED STRIP 12,6 W 700 mA Constant Current 700 mA 220~240V 50/60Hz	5476 __ / _ 3: 1-10V  5476 __ / _ 5: Push 

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system.



5480	Finishes 15/ _ _ Grey L2 (NCS S 2500-N) 28/ _ _ Brown M1 (NCS S 4020-Y60R) 72/ _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)	LED Colour Temperature /1 _ 2700 K - 2388 lm /3 _ 3500 K - 2551 lm IE CRI >90	Control 5480 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 Triac _ _ / _ 5 Push _ _ / _ Z Casambi
	Finishes 71/ _ _ Grey Felt L1 & Grey Felt D1 76/ _ _ Grey Felt L1	LED Colour Temperature /1 _ 2700 K - 2388 lm /3 _ 3500 K - 2551 lm IE CRI >90	Control 5480 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 Triac _ _ / _ 5 Push _ _ / _ Z Casambi
	Materials Diffuser: PC- Polycarbonate. Shade: ABS. Wall support: Aluminum. Light Source and electronics 1 x LED STRIP 8,4 W 700 mA 1 x LED STRIP 12,6 W 700 mA Constant Current 700 mA 220~240V 50/60Hz	Packaging 1 Box 0,46 x 0,46 x 0,4 m Vol 0,0846 m³ Gross weight 6,1 Kg Net weight 3,4 Kg Notes 5480 _ _ / _ 1: DALI-2 Bi-volt A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system.	LED IP20 CE UK ErC RoHS
5481	Finishes 15/ _ _ Grey L2 (NCS S 2500-N) 28/ _ _ Brown M1 (NCS S 4020-Y60R) 72/ _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)	LED Colour Temperature /1 _ 2700 K - 2871 lm /3 _ 3500 K - 3067 lm IE CRI >90	Control 5481 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 Triac _ _ / _ 5 Push _ _ / _ Z Casambi
	Finishes 71/ _ _ Grey Felt L1 & Grey Felt D1 76/ _ _ Grey Felt L1	LED Colour Temperature /1 _ 2700 K - 2871 lm /3 _ 3500 K - 3067 lm IE CRI >90	Control 5481 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 Triac _ _ / _ 5 Push _ _ / _ Z Casambi
	Materials Diffuser: PC- Polycarbonate. Shade: ABS. Wall support: Aluminum. Light Source and electronics 1 x LED STRIP 8,4 W 700 mA 1 x LED STRIP 12,6 W 700 mA Constant Current 700 mA 220~240V 50/60Hz	Packaging 1 Box 0,46 x 0,46 x 0,4 m Vol 0,0846 m³ Gross weight 6,1 Kg Net weight 3,4 Kg Notes 5481 _ _ / _ 1: DALI-2 Bi-volt	LED IP20 CE UK ErC RoHS

5485

Finishes	LED Colour Temperature	Control
72/ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N) 73/ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)	/1 2700 K - 2388 lm /3 3500 K - 2551 lm E CRI >90	5485 __ / 1 DALI-2 __ / 3 1-10V __ / 4 Triac __ / 5 Push __ / Z Casambi
Finishes	LED Colour Temperature	Control
71/ Grey Felt L1 & Grey Felt D1	/1 2700 K - 2388 lm /3 3500 K - 2551 lm E CRI >90	5485 __ / 1 DALI-2 __ / 3 1-10V __ / 4 Triac __ / 5 Push __ / Z Casambi
Materials Diffuser: PC- Polycarbonate. Shade: ABS. Wall support: Aluminum. Ring: Steel. Light Source and electronics 1 x LED STRIP 8,4 W 700 mA 1 x LED STRIP 12,6 W 700 mA Constant Current 700 mA 220~240V 50/60Hz		Packaging 1 Box 0,51 x 0,51 x 0,43 m Vol 0,1118 m³ Gross weight 8,42 Kg Net weight 4,22 Kg Notes 5485 __ / 1 : DALI-2

5486

Finishes	LED Colour Temperature	Control
72/ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N) 73/ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)	/1 2700 K - 2871 lm /3 3500 K - 3067 lm E CRI >90	5486 __ / 1 DALI-2 __ / 3 1-10V __ / 4 Triac __ / 5 Push __ / Z Casambi
Finishes	LED Colour Temperature	Control
71/ Grey Felt L1 & Grey Felt D1	/1 2700 K - 2871 lm /3 3500 K - 3067 lm E CRI >90	5486 __ / 1 DALI-2 __ / 3 1-10V __ / 4 Triac __ / 5 Push __ / Z Casambi
Materials Diffuser: PC- Polycarbonate. Shade: ABS. Wall support: Aluminum. Ring: Steel. Light Source and electronics 2 x LED STRIP 12,6 W 700 mA Constant Current 700 mA 220~240V 50/60Hz		Packaging 1 Box 0,66 x 0,66 x 0,5 m Vol 0,2178 m³ Gross weight 11,35 Kg Net weight 5,45 Kg Notes 5486 __ / 1 : DALI-2

5487

Finishes	LED Colour Temperature	Control
21/  Black Grey (NCS S 7000-N)	/1 2700 K - 2388 lm	5487 __ / __
73/  Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)	/3 3500 K - 2551 lm  CRI >90	__ / 1 DALI-2 __ / 3 1-10V __ / 4 Triac __ / 5 Push __ / Z Casambi

Finishes	LED Colour Temperature	Control
71/  Grey Felt L1 & Grey Felt D	/1 2700 K - 2388 lm /3 3500 K - 2551 lm  CRI >90	5487 __ / __ __ / 1 DALI-2 __ / 3 1-10V __ / 4 Triac __ / 5 Push __ / Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m
Vol 0,2178 m³
Gross weight 11,52 Kg Net weight 5,62 Kg

LED  IP20 CE UK ENEC

5491

Finishes	LED Colour Temperature	Control
72/  Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)	/1 2700 K - 4307 lm	5491 __ / __
73/  Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)	/3 3500 K - 4601 lm  CRI >90	__ / 1 DALI-2 __ / 3 1-10V __ / 4 Triac __ / 5 Push __ / Z Casambi

Finishes	LED Colour Temperature	Control
71/  Grey Felt L1 & Grey Felt D1	/1 2700 K - 4307 lm /3 3500 K - 4601 lm  CRI >90	5491 __ / __ __ / 1 DALI-2 __ / 3 1-10V __ / 4 Triac __ / 5 Push __ / Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

3 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,67 m
Vol 0,2919 m³
Gross weight 14,85 Kg Net weight 7,35 Kg

LED  IP20 CE UK ENEC



Mayfair Mini

Design by Diego Fortunato

The perfect lighting companion, Mayfair Mini is a small-scale design that casts a contained pool of diffuse, downlight for an intimate atmosphere. A light to grab and go that can be moved where needed -indoors or out- via its slender stem.

Table



5495

Ø 20 x 38 cm

Portable



5496

Ø 20 x 38 cm

Bolt-down



5497

Ø 20 x 38 cm

Bolt-down

5495	Finishes 23 Warm White (NCS S 0502-Y50R) 25 Beige D1 (NCS S 4005-Y50R) 38 Terra Dark (NCS S 5040-Y70R) 47 Green L1 (NCS S 6005-G80Y)	LED Colour Temperature /1_ 2700 K - 223 lm E CRI >90	Control 5495 _ _ / 16 Touch sensor
	Materials Base and shade: ABS + PC- Polycarbonate. Diffuser: PC- Polycarbonate. Stem: Stainless steel. Light Source and electronics 1 x LED PLATE 5V 2,5 W Constant Voltage 5V 100~240V 50/60Hz	Packaging 1 Box 0,25 x 0,26 x 0,50 m Vol 0,033 m³ Gross weight 1,62 Kg Net weight 0,73 Kg Notes Rechargeable battery autonomy: 6h at 100% Intensity. 12h at 50% Intensity. 18h at 25% Intensity. USB-C cable: length 1,20 m (from the base to the USB charger).	LED IP20 CE UK ERC Bi-volt

5496

- Finishes**
- **23 Warm White**
(NCS S 0502-Y50R)
 - **25 Beige D1**
(NCS S 4005-Y50R)
 - **38 Terra Dark**
(NCS S 5040-Y70R)
 - **47 Green L1**
(NCS S 6005-G80Y)

LED Colour Temperature
 /1 _ 2700 K - 223 lm
 E
 CRI >90

Control
5496 _ _ / 16 Touch sensor
 (with or without memory)

Materials

Base and shade: ABS + PC- Polycarbonate
 Diffuser: PC- Polycarbonate.
 Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
 Constant Voltage 5V
 100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,26 x 0,50 m
 Vol 0,033 m³
 Gross weight 1,84 Kg Net weight 0,94 Kg

Notes

Cable length: 1 m
 (from the base to the USB charger)

LED IP20 CE UK ENEC Bi-volt

5497

- Finishes**
- **23 Warm White**
(NCS S 0502-Y50R)
 - **25 Beige D1**
(NCS S 4005-Y50R)
 - **38 Terra Dark**
(NCS S 5040-Y70R)
 - **47 Green L1**
(NCS S 6005-G80Y)

LED Colour Temperature
 /1 _ 2700 K - 223 lm
 E
 CRI >90

Control
5497 _ _ / _ _

_ _ / 10 On/ Off
 _ _ / 11 DALI-2
 _ _ / 13 1-10V

Materials

Base and shade: ABS + PC- Polycarbonate
 Diffuser: PC- Polycarbonate.
 Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
 Constant Voltage 5V
 100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,26 x 0,50 m
 Vol 0,033 m³
 Gross weight 1,45 Kg Net weight 0,54 Kg

Notes

Cable length: 1 m. (the cable connects
 directly to the remote driver)

LED IP20 CE UK ENEC Bi-volt



Mayfair

Design by Diego Fortunato

A modern reimagining of the traditional 19th-century bouillotte lamp, the Mayfair collection is a statement in contemporary design. Perfectly proportioned, its luminaire casts a pool of diffuse, downward light to create an intimate lighting effect.

Table Floor



5500

Ø 30 x 52 cm



5505

Ø 30 x 52 cm



5510

Ø 30 x 147 cm

5515

Ø 30 x 147 cm

5500

Finishes

- 07/ __ Graphite and green (RAL 7016. RAL 6026)
- 08/ __ Graphite and orange (RAL 7016. RAL 2009)

LED Colour Temperature

/1_ 2700 K - 2027 lm
D
CRI >90

Control

5500 __ / __

__ / 16 Optical sensor
__ / 18 Push 2 (without memory)

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Tube: Steel. Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,35 x 0,61 m
Vol 0,0470 m³
Gross weight 3,6 Kg Net weight 3,4 Kg

Notes

Touch dimmer on base. Electric cable 2 m.

LED IP20 CE UK ENE Dimmer Multi-volt

5505

Finishes 18/ _ _ Graphite (RAL 7016) 23/ _ _ Warm White (NCS S 0502-Y50R) 25/ _ _ Beige D1 (NCS S 4005-Y50R) 38/ _ _ Terra Dark (NCS S 5040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 2027 lm D CRI >90	Control 5505 _ _ / _ _ _ _ / 16 Optical sensor _ _ / 18 Push 2 (without memory)
Finishes 20/ _ _ Gold 67/ _ _ Copper	LED Colour Temperature /1 _ 2700 K - 2027 lm D CRI >90	Control 5505 _ _ / _ _ _ _ / 16 Optical sensor _ _ / 18 Push 2 (without memory)

Materials

Diffuser: PC- Polycarbonate.
 Shade: PMMA.
 Tube: Steel. Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
 1 x LED STRIP 24V 12,6 W
 Constant Voltage 24V
 100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,35 x 0,61 m
 Vol 0,0470 m³
 Gross weight 3,6 Kg Net weight 3,4 Kg

Notes

Touch dimmer on base. Electric cable 2 m.

LED ☐ IP20 ☐ CE UK ENE ☐ Dimmer ☐ Multi-volt ☐



5510	Finishes 07/ __ Graphite and green (RAL 7016. RAL 6026) 08/ __ Graphite and orange (RAL 7016. RAL 2009)	LED Colour Temperature /1 _ 2700 K - 2027 lm CRI >90	Control 5510 __ / __ __ / 16 Optical sensor __ / 18 Push 2 (without memory)
	Materials Diffuser: PC- Polycarbonate. Shade: PMMA. Tube: Steel. Base: Zinc Alloy. Light Source and electronics 1 x LED STRIP 24V 2,4 W 1 x LED STRIP 24V 12,6 W Constant Voltage 24V 100~240V 50/60Hz	Packaging 1 Box 1,50 x 0,32 x 0,34 m Vol 0,1630 m³ Gross weight 12,8 Kg Net weight 6,2 Kg Notes Touch dimmer on shade. Electric cable 2 m. LED IP20 CE UK EBC Dimmer Multi-volt	

5515	Finishes 18/ __ Graphite (RAL 7016) 23/ __ Warm White (NCS S 0502-Y50R) 25/ __ Beige D1 (NCS S 4005-Y50R) 38/ __ Terra Dark (NCS S 5040-Y70R) 47/ __ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 2027 lm CRI >90	Control 5515 __ / __ __ / 16 Optical sensor __ / 18 Push 2 (without memory)
	Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)		

	Finishes 20/ __ Gold 67/ __ Copper	LED Colour Temperature /1 _ 2700 K - 2027 lm CRI >90	Control 5515 __ / __ __ / 16 Optical sensor __ / 18 Push 2 (without memory)
	Materials Diffuser: PC- Polycarbonate. Shade: PMMA. Tube: Steel. Base: Zinc Alloy. Light Source and electronics 1 x LED STRIP 24V 2,4 W 1 x LED STRIP 24V 12,6 W Constant Voltage 24V 100~240V 50/60Hz	Packaging 1 Box 1,50 x 0,32 x 0,34 m Vol 0,1630 m³ Gross weight 12,8 Kg Net weight 6,2 Kg Notes Touch dimmer on shade. Electric cable 2 m. LED IP20 CE UK EBC Dimmer Multi-volt	



Pendant



5520 **5525**
 Ø 30 cm Ø 30 cm



5520

- Finishes**
- 07/** Graphite and green (RAL 7016, RAL 6026)
 - 08/** Graphite and orange (RAL 7016, RAL 2009)

LED Colour Temperature
/1 2700 K - 2027 lm
D CRI >90

Control
5520 /
 / 1 DALI-2
 / B Push; 1-10V
 / Z Casambi



Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

Materials
 Diffuser: PC- Polycarbonate.
 Shade: PMMA.
 Tube and canopy: Steel.

Light Source and electronics
 1 x LED STRIP 24V 2,4 W
 1 x LED STRIP 24V 12,6 W
 Constant Voltage 24V
 220~240V 50/60Hz

Packaging
 1 Box 0,50 x 0,31 x 0,31 m
 Vol 0,0500 m³
 Gross weight 2,8 Kg Net weight 1,8 Kg

Notes
 Extra cable length.
LED **IP20** **CE** **UK** **ERC**

5525	Finishes 18/ _ _ Graphite (RAL 7016) 23/ _ _ Warm White (NCS S 0502-Y50R) 25/ _ _ Beige D1 (NCS S 4005-Y50R) 38/ _ _ Terra Dark (NCS S 5040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 2027 lm CRI >90	Control 5525 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
	Finishes 20/ _ _ Gold 67/ _ _ Copper	LED Colour Temperature /1 _ 2700 K - 2027 lm CRI >90	5525 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
Select Electrical connection Surface Free Wire Built-in XS Remote Micro Remote XXS			
Materials Diffuser: PC- Polycarbonate. Shade: PMMA. Tube and canopy: Steel. Light Source and electronics 1 x LED STRIP 24V 2,4 W 1 x LED STRIP 24V 12,6 W Constant Voltage 24V 220~240V 50/60Hz		Packaging 1 Box 0,50 x 0,31 x 0,31 m Vol 0,0500 m³ Gross weight 2,9 Kg Net weight 1,9 Kg Notes Extra cable length. LED IP20 CE UK ErC	



Select your model at **vibia.com** and adjust



2 x 5525



3 x 5525



4 x 5525




4 x 5525




5 x 5525



7 x 5525



8 x 5525



10 x 5525



22 x 5525



16 x 5525



See more
multiple models
at **vibia.com**

Finishes	Finishes	LED Colour Temperature	Control
5520	5525	/1 _ 2700 K	Model _ _ / _ _
 07/ _ _ Graphite and green (RAL 7016, RAL 6026)	 20/ _ _ Gold	CRI >90	__ / _ 1 DALI-2 __ / _ B Push; 1-10V __ / _ Z Casambi
 08/ _ _ Graphite and orange (RAL 7016, RAL 2009)	 67/ _ _ Copper		
	 18/ _ _ Graphite (RAL 7016)		
	 23/ _ _ Warm White (NCS S 0502-Y50R)		
	 25/ _ _ Beige D1 (NCS S 4005-Y50R)		
	 38/ _ _ Terra Dark (NCS S 5040-Y70R)		
	 47/ _ _ Green L1 (NCS S 4005-G80Y)		
	Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)		

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5520, 5525

Drop ceiling	Regular ceiling
	
Ø 3 cm height 7 cm	Ø 16 cm
for plaster ceilings. Black finish.	match with fixture finish.
	
Ø 6 cm height 6 cm	Ø 20 cm
for all types of drop ceilings. Match with fixture finish.	you can choose the finish of the canopy among black, white or any colour matching one of the pendant.
	
Ø 8 cm height 6 cm	Ø 36 cm
match with fixture finish.	
	
	Ø 40 cm
Remote	Built-in

Materials	Notes
5520	Additional cable length from 2 m.
Diffuser: PC- Polycarbonate. Shade: PMMA.	
Tube and canopy: Steel.	
5525	
Diffuser: PC- Polycarbonate.	
Shade, tube and canopy: Steel.	

LED   IP20    



Africa

Design by Francisco Gomez Paz

An object of desire, Africa is a unique gift that combines richness of form and materiality with high performance lighting capabilities. A holistic exploration of beauty and functionality.

Table



5580

Ø 5 x 45 cm

Portable



5585

Ø 5 x 40 cm

Portable



5590

Ø 5 x 45 cm

Bolt-down



5595

Ø 5 x 40 cm

Bolt-down

5580

Finishes

- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 25/ _ _ Beige D1 (NCS S 4005-Y50R)
- 29/ _ _ Brown D1 (NCS S 8005-Y50R)
- 38/ _ _ Terra Dark (NCS S 5040-Y70R)

LED Colour Temperature

/1 _ 2700 K - 520 lm
E
CRI >90

Control

5580 _ _ / 15 Push

Materials

Body: Aluminium.
Diffuser: PC- Polycarbonate

Light Source and electronics

1 x LED 4,5W 500 mA
Output: DC 5.0 V 2.0 A 10.0W
Input: 100~240V 50/60Hz

Packaging

1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,23 Kg Net weight 0,9 Kg

Notes

Battery capacity 10,000mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
6,5h at 100% Intensity.
10h at 66% Intensity.
20h at 33% Intensity.

LED IP20 CE UK ENEC

5585

- Finishes**
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **25/** _ _ Beige D1
(NCS S 4005-Y50R)
 - **29/** _ _ Brown D1
(NCS S 8005-Y50R)
 - **38/** _ _ Terra Dark
(NCS S 5040-Y70R)

LED Colour Temperature
/1 _ 2700 K - 520 lm
E
CRI >90

Control
5585 _ _ / **15** Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,5W 500 mA
Output: DC 5.0 V 2.0 A 10.0W
Input: 100~240V 50/60Hz

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,23 Kg Net weight 0,9 Kg

Notes
Battery capacity 10.000mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
6,5h at 100% Intensity.
10h at 66% Intensity.
20h at 33% Intensity.

LED IP20 CE UK ENEC

5590

- Finishes**
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **25/** _ _ Beige D1
(NCS S 4005-Y50R)
 - **29/** _ _ Brown D1
(NCS S 8005-Y50R)
 - **38/** _ _ Terra Dark
(NCS S 5040-Y70R)

LED Colour Temperature
/1 _ 2700 K - 520 lm
E
CRI >90

Control
5590 _ _ / **15** Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,5W 500 mA 9V
Output: DC 5.0 V 2.0 A 10.0W

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,3 Kg Net weight 0,950 Kg

Notes
Electric cable 2 m

LED IP20 CE UK ENEC

5595

- Finishes**
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **25/** _ _ Beige D1
(NCS S 4005-Y50R)
 - **29/** _ _ Brown D1
(NCS S 8005-Y50R)
 - **38/** _ _ Terra Dark
(NCS S 5040-Y70R)

LED Colour Temperature
/1 _ 2700 K - 520 lm
E
CRI >90

Control
5595 _ _ / **15** Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,5W 500 mA 9V
Output: DC 5.0 V 2.0 A 10.0W

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,3 Kg Net weight 0,950 Kg

Notes
Electric cable 2 m

LED IP20 CE UK ENEC



A439
Ø 27 cm



A440
Ø 27 cm

A439	Finishes 83/ __ Walnut (Tray)	Control A439 83 / 00 On/ Off
	Materials Tray: Wood (Rustic Walnut) Output: DC 5.0V 4.0 A. Input: 100~240V 50/60Hz	Packaging 1 Box 0,350 x 0,350 x 0,090 m Vol 0,0110 m³ Gross weight 1,2 Kg Net weight 0,750 Kg Notes Electric cable with plug. Electric cable 2 m IP20CEUKERCBi-volt
A440	Finishes 83/ __ Walnut (Tray)	Control A440 83 / 00 On/ Off
	Materials Tray: Wood (Rustic Walnut). Output: DC 5.0V 4.0 A. Input: 100~240V 50/60Hz	Packaging 1 Box 0,350 x 0,350 x 0,090 m Vol 0,0110 m³ Gross weight 1,2 Kg Net weight 0,750 Kg Notes Electric cable with plug. Electric cable 2 m IP20CEUKERCBi-volt



North

Design by Arik Levy

North features a base, stem, and shade that are disconnected from one another in a dynamic system of adjustable parts. Protruding arms hold triangular shades that direct the light where needed.

Floor



5605

max. 270 cm x max. 230 cm x max. 355 cm



5620

max. 447 cm x max. 325 cm x max. 425 cm



5666

max. 210 cm x max. 310 cm x max. 130 cm

5605

Finishes

- 10/ _ _ White
(NCS S 0300-N)
- 11/ _ _ Black
(NCS S 8500 N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 42 / _ _ Blue M1
(NCS S 5010-B10G)

LED Colour Temperature

/1_ 2700 K - 2538,0 lm
D >

CRI >90

Control

5605 _ _ / 15 Push

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Base: Steel.

Light Source and electronics

2 x LED 9 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging


10 Boxes
Total Vol 0,35 m³
Gross weight 91 Kg Net weight 79,8 Kg

Notes

Can be connected with or without plug.
Electric cable 2,5 m

LED IP20 CE UK ENE Dimmer

5620



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 11/ _ _ Black (NCS S 8500 N)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 42 / _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

/1 _ 2700 K - 3807 lm



CRI >90

Control

5620 _ _ / 15 Push

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Base: Steel.

Light Source and electronics

3 x LED 9W 350mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

12 Boxes
Total Vol 0,36 m³
Gross weight 94,85 Kg Net weight 81,25 Kg

Notes

Can be connected with or without plug.
Electric cable 2,5 m



5666

Finishes

- 10/ _ _ White (NCS S 0300-N)
- 11/ _ _ Black (NCS S 8500 N)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 42 / _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

/1 _ 2700 K - 1269 lm



CRI >90

/2 _ 3000 K - 1123 lm



CRI >80

/3 _ 3500 K - 1374,9 lm



CRI >90

Control

5666 _ _ / 5 Push

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Counterweight: Aluminum.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes 0,24 x 0,217 x 0,21 m
Total Vol 0,0464 m³
Gross weight 6,2 Kg Net weight 4,05 Kg

Notes

Electric cable with plug.
Electric cable 2,5 m
Extra cable length.



Height-adjustable shade.



Adjustable-angle rods.
Can be connected with or without plug.



Wall


5630

150 x 195 cm


5630	Finishes 10/ _ _ White (NCS S 0300-N) 11/ _ _ Black (NCS S 8500 N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 42 / _ _ Blue M1 (NCS S 5010-B10G)	LED Colour Temperature /1 _ 2700 K - 1269 lm /2 _ 3000 K - 1123 lm CRI >90 /3 _ 3500 K - 1374,9 lm CRI >80	Control 5630 _ _ / _ 5 Push
	Materials Rods: Carbon fiber. Shade: Aluminum. Diffuser: PMMA. Wall Plate: Steel. Light Source and electronics 1 x LED 9 W 350 mA Constant Current 350 mA 110~240V 50/60Hz	Packaging 3 Boxes Total Vol 0,24 m³ Gross weight 11,05 Kg Net weight 5,85 Kg Notes Height-adjustable shade. Push-button on the wall plate. Can be connected with or without plug. Electric cable 2,5 m LED IP20 CE UK ERC Dimmer Bi-volt	



Pendant

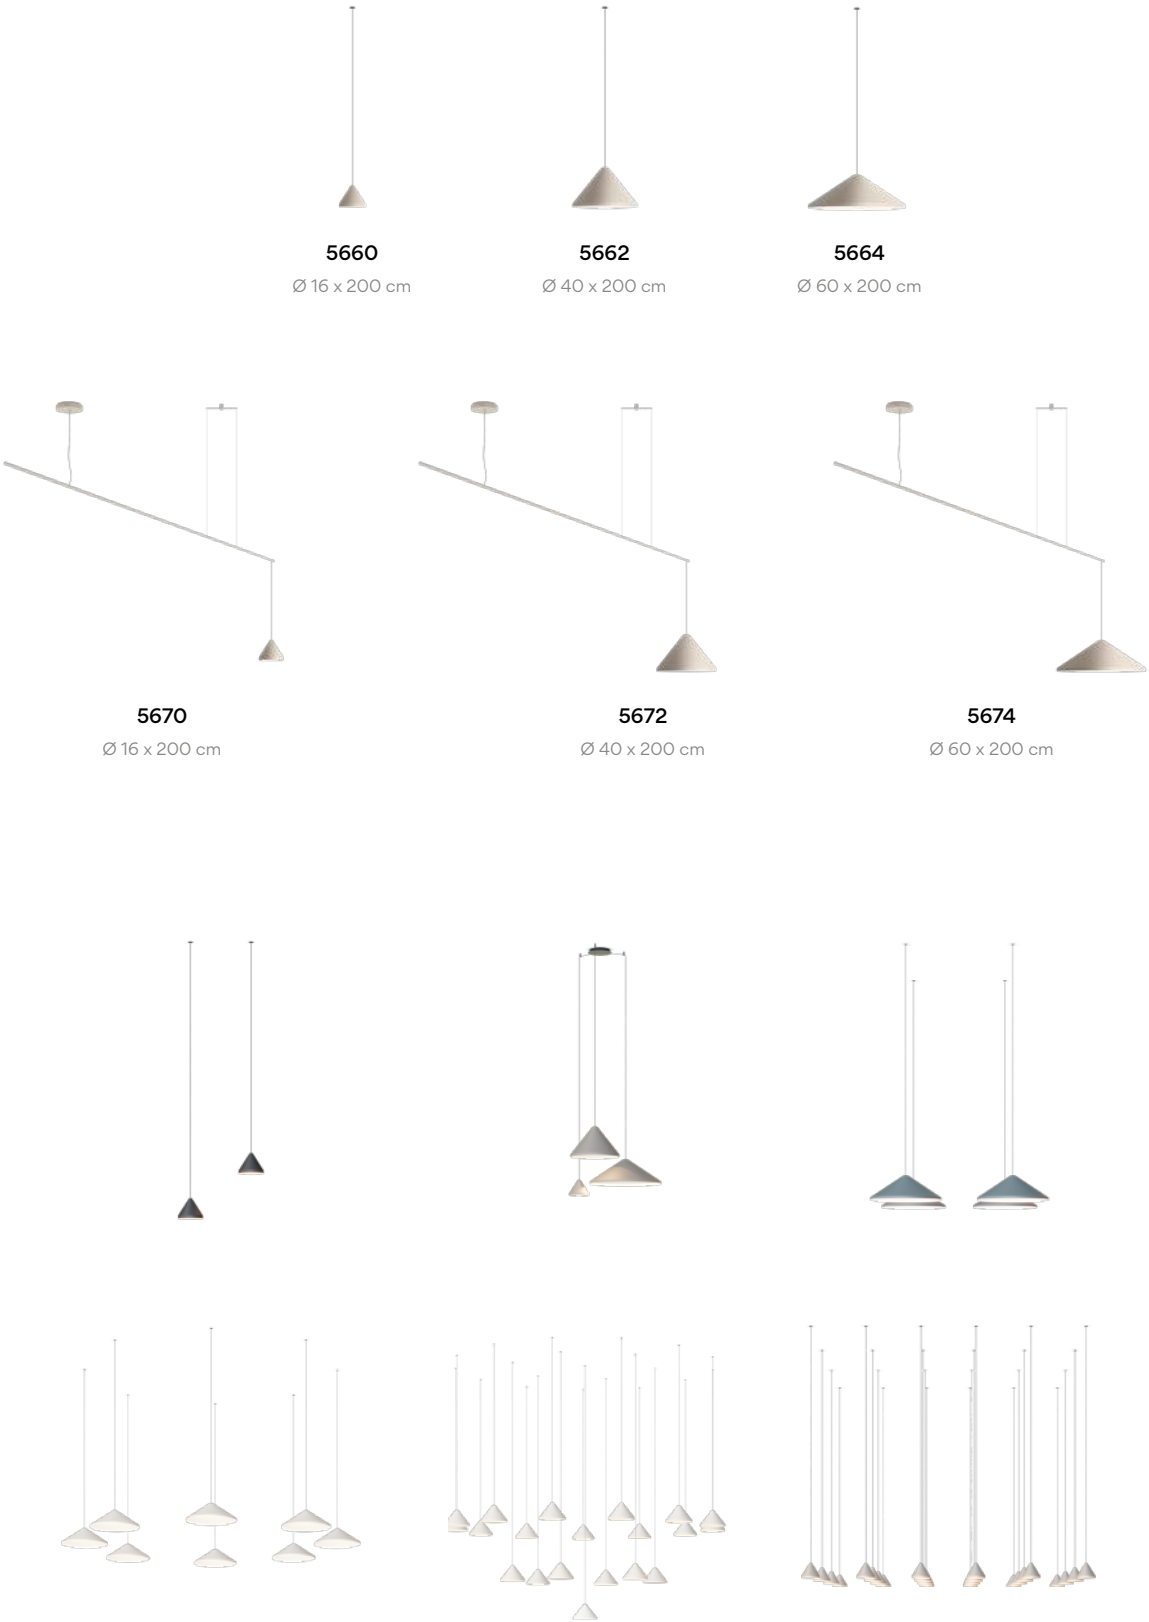

5660



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 11/ _ _ Black (NCS S 8500 N)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 42 / _ _ Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D

CRI >90

/2 _ 3000 K - 1123 lm
D

CRI >80

/3 _ 3500 K - 1374,9 lm
G

CRI >90

Control

5660 _ _ / _ _

_ _ / _ 1 DALI-2

_ _ / _ B Push; 1-10V

_ _ / _ Z Casambi

Select Electrical connection



Materials

Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,24 x 0,217 x 0,217 m
Vol 0,01 m³
Gross weight 2,3 Kg Net weight 1,25 Kg

Notes


5660 _ _ / _ 1: DALI-2 Bi-volt

5660 _ _ / _ B: Push; 1-10V Bi-volt

Extra cable length.

LED IP20 CE UK ENEC

5662



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 11/ _ _ Black (NCS S 8500 N)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 42 / _ _ Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D

CRI >90

/2 _ 3000 K - 1123 lm
D

CRI >80

/3 _ 3500 K - 1374,9 lm
G

CRI >90

Control


5662 _ _ / _ _

_ _ / _ 1 DALI-2

_ _ / _ B Push; 1-10V

_ _ / _ Z Casambi

Select Electrical connection

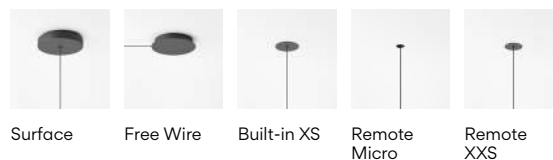

Materials

Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,36 x 0,537 x 0,537 m
Vol 0,10 m³
Gross weight 4,8 Kg Net weight 2,25 Kg

Notes

5662 _ _ / _ 1: DALI-2 Bi-volt

5662 _ _ / _ B: Push; 1-10V Bi-volt

Extra cable length.

LED IP20 CE UK ENEC

5664	Finishes 10/ _ _ White (NCS S 0300-N) 11/ _ _ Black (NCS S 8500 N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 42 / _ _ Blue M1 (NCS S 5010-B10G) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 1269 lm D CRI >90 /2 _ 3000 K - 1123 lm D CRI >80 /3 _ 3500 K - 1374,9 lm G CRI >90	Control 5664 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
21 cm Ø 60 cm max. 200 cm	Select Eletrical connection Surface Free Wire Built-in XS Remote Micro Remote XXS	Materials Shade: Aluminum. Diffuser: PMMA. Canopy: Steel. Light Source and electronics 1 x LED 9 W 350 mA Constant Current 350 mA 110-240V 50/60Hz	Packaging 1 Box 0,32 x 0,727 x 0,727 Vol 0,17 m³ Gross weight 6,25 Kg Net weight 2,95 Kg Notes 5664 _ _ / _ 1: DALI-2 Bi-volt 5664 _ _ / _ B: Push; 1-10V Bi-volt Extra cable length. LED IP20 CE UK ERC



Height-adjustable shade.



Select your model at vibia.com and adjust



2 x 5660



2 x 5660



3 x 5660/5662/5664




4 x 5664



4 x 5660




5 x 5660



6 x 5660




8 x 5664



8 x 5660



8 x 5660



10 x 5664



20 x 5662



24 x 5660




7 x 5660




9 x 5660



29 x 5660



10 x 5660



13 x 5660



5 x 5662

See more
multiple models
at vibia.com

Finishes 10/ _ _ White (NCS S 0300-N) 11/ _ _ Black (NCS S 8500 N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 42 / _ _ Blue M1 (NCS S 5010-B10G)	Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K D CRI >90 /2 _ 3000 K D CRI >80 /3 _ 3500 K G CRI >90	Control Model _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
---	---	---	--

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5660 / 5662 / 5664

Drop ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Match with
fixture finish.

Ø 8 cm
height 6 cm

match with
fixture finish.

Regular ceiling



Ø 18 cm

match with
fixture finish.

Ø 20 cm

you can choose the finish of the
canopy among black, white or any
colour matching one of the Pendant.

Ø 22 cm

Ø 36 cm

Ø 40 cm

Remote

Built-in

Materials


Shade: Aluminum
Diffuser: PMMA. Canopy: Steel.

Notes

Additional cable length
from 2 m.

LED  IP20      Bi-volt

5670



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 11/ _ _ Black (NCS S 8500 N)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 42 / _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

- /1 _ 2700 K - 1269 lm
- /2 _ 3000 K - 1123 lm
- CRI >90 CRI >80
- /3 _ 3500 K - 1374 lm
- CRI >90

Control

5670 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ B Push; 1-10V
- _ _ / _ Z Casambi

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,06 m³
Gross weight 5,75 Kg Net weight 2 Kg

Notes

5670 _ _ / _ 1: DALI-2 **Bi-volt**
5670 _ _ / _ B: Push; 1-10V **Bi-volt**
Extra cable length.

LED IP20 CE UK ENE

5672



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 11/ _ _ Black (NCS S 8500 N)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 42 / _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

- /1 _ 2700 K - 1269 lm
- /2 _ 3000 K - 1123 lm
- CRI >90 CRI >80
- /3 _ 3500 K - 1374 lm
- CRI >90

Control

5672 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ B Push; 1-10V
- _ _ / _ Z Casambi

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,14 m³
Gross weight 8,25 Kg Net weight 3 Kg

Notes

5672 _ _ / _ 1: DALI-2 **Bi-volt**
5672 _ _ / _ B: Push; 1-10V **Bi-volt**
Extra cable length.

LED IP20 CE UK ENE

5674



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 11/ _ _ Black (NCS S 8500 N)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 42 / _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

- /1 _ 2700 K - 1269 lm
- /2 _ 3000 K - 1123 lm
- CRI >90 CRI >80
- /3 _ 3500 K - 1374 lm
- CRI >90

Control

5674 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ B Push; 1-10V
- _ _ / _ Z Casambi

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,21 m³
Gross weight 9,7 Kg Net weight 3,7 Kg

Notes

5674 _ _ / _ 1: DALI-2 **Bi-volt**
5674 _ _ / _ B: Push; 1-10V **Bi-volt**
Extra cable length.

LED IP20 CE UK ENE



Lily

Design by Ludovica+Roberto Palomba

The simplicity of Lily's refined silhouette makes this fixture ideal for an elegant interior with a relaxed ambience. Its graceful glass diffuser radiates brings a sense of warmth and wellbeing.

Table Floor Pendant



5720

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)
 ● 25/ _ _ Beige D1
 (NCS S 4005-Y50R)

LED Colour Temperature
 /1_ 2700 K - 2170 lm
 E
 CRI >90

Control

5720 _ _ / _ _

_ _ / 15 Push
 _ _ / 12 Casambi

Materials

Body: Steel.
 Diffuser: Triple opal blown glass.

Light Source and electronics
 1 x LED STRIP 16,7 W 900 mA
 Constant Voltage 24V
 100~240V 50/60Hz

Packaging

1 Box 0,59 x 0,68 x 0,54 m
 Vol 0,21 m³
 Gross weight 10 Kg Net weight 5 Kg

Notes

5720 _ _ / _ 5: Push **Multi-volt**

Electric cable 2,5 m.

LED ☐ IP20 CE UK ENE

5725

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **25/** _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2170 lm

E

CRI >90

Control

5725 _ _ / _ _

_ _ / **15** Push

_ _ / **1Z** Casambi

Materials

Body: Steel.
Diffuser: Triple opal blown glass.

Light Source and electronics

1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 1,57 x 0,49 x 0,49 m
Vol 0,277 m³
Gross weight 14,2 Kg Net weight 8,20 Kg

Notes

5725 _ _ / _ 5: Push **Multi-volt**

Electric cable 2,5 m.

LED **IP20** **CE** **UK** **ERC**



5730



Finishes

●

11/ _ _ Black
(NCS S 8500-N)

●

25/ _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

/1_ 2700 K - 2170 lm



CRI >90

Control

5730 _ _ / _ _

_ _ / 11 DALI-2

_ _ / 1B Push; 1-10V

_ _ / 1Z Casambi

 Select Eletrical connection









Surface

Built-in XS

Remote Micro

Remote XXS

Materials

Body: Aluminium.
Shade: Triple opal blown glass.

Light Source and electronics

1 x LED STRIP 16,2 W 900 mA
Constant Current 900mA
110~240V 50/60Hz

Packaging

1 Box 0,27 x 0,60 x 0,60 m
Vol 0,972 m³
Gross weight 6 Kg Net weight 2 Kg

Notes

Extra cable length.



 Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5730

Drop ceiling



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.



Ø 8 cm
height 6 cm

match with fixture finish.

Remote

Built-in

Regular ceiling



Ø 20 cm

match with fixture finish.



Tempo

Design by Lievore, Altherr

The Tempo collection reclaims our collective memory of light, distilling lighting archetypes to their most basic forms. Vibia presents three designs in two sizes: the disc, the diamond and the milk glass oval - all inspired by the interplay of opacity, translucence and transparency.

Wall



5756 5757

122,5 x 80 cm



5758 5759

116,5 x 80 cm



5760 5761

120 x 80 cm



5762 5763

42,5 x 140 cm




5764 5765

36,5 x 140 cm



5766 5767

40 x 140 cm



Ref.
5757, 5759, 5761, 5763, 5765, 5767.
Recessed dimmable driver.



Ref.
5756, 5758, 5760, 5762, 5764, 5766.
Push dimmer on the cable.
With plug.

5756

Finishes
 ● **18/** __ Graphite
 (ADAPTA RF9913WX)
 ● **37/** __ Terra Red
 (NCS S 4040-Y70R)
 ● **58/** __ Cream
 (RAL 7044)
 ● **62/** __ Green
 (NCS S 3010-G20Y)

LED Colour Temperature
 /1 _ 2700 K - 415 lm

 CRI >90

Control
 5756 __ / 15 Push

Materials
 Diffuser: Blown-glass.
 LED support: Aluminum.
 Structures: Steel.
 Shade: Aluminum.
Light Source and electronics
 1 x LED 4 W 350 mA
 Constant Current 350 mA
 220~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,082 m³
 Gross weight 4,3 Kg Net weight 2,5 Kg
Notes
 Push dimmer on the cable. With plug (4 m)

LED  IP20 CE UK ENEC  Dimmer

5757

Finishes
 ● **18/** __ Graphite
 (ADAPTA RF9913WX)
 ● **37/** __ Terra Red
 (NCS S 4040-Y70R)
 ● **58/** __ Cream
 (RAL 7044)
 ● **62/** __ Green
 (NCS S 3010-G20Y)

LED Colour Temperature
 /1 _ 2700 K - 415 lm

 CRI >90

Control
 5757 __ / __
 __ / 1 DALI-2
 __ / B Push; 1-10V
 __ / Z Casambi

Materials
 Diffuser: Blown-glass.
 LED support: Aluminum.
 Structures: Steel.
 Shade: Aluminum.
Light Source and electronics
 1 x LED 4 W 350 mA
 Constant Current 350 mA
 220~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,082 m³
 Gross weight 4,3 Kg Net weight 2,5 Kg
Notes
 Recessed dimmable driver (2,5 m)
  IP20 CE UK ENEC 
 Ø 7,5 cm

5758

Finishes
 ● **18/** __ Graphite
 (ADAPTA RF9913WX)
 ● **37/** __ Terra Red
 (NCS S 4040-Y70R)
 ● **58/** __ Cream
 (RAL 7044)
 ● **62/** __ Green
 (NCS S 3010-G20Y)

LED Colour Temperature
 /1 _ 2700 K - 415 lm

 CRI >90

Control
 5758 __ / 15 Push

Materials
 Diffuser: Blown-glass.
 LED support: Aluminum.
 Structures: Steel.
Light Source and electronics
 1 x LED 4 W 350 mA
 Constant Current 350 mA
 220~240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,088 m³
 Gross weight 3,5 Kg Net weight 1,7 Kg
Notes
 Push dimmer on the cable. With plug (4 m).
  IP20 CE UK ENEC  Dimmer

5759	Finishes 18/ _ _ Graphite (ADAPTA RF9913WX) 37/ _ _ Terra Red (NCS S 4040-Y70R) 58/ _ _ Cream (RAL 7044) 62/ _ _ Green (NCS S 3010-G20Y)	LED Colour Temperature /1_ 2700 K - 415 lm E CRI >90	Control 5759 _ _ / _ _ __ / _ 1 DALI-2 __ / _ B Push; 1-10V __ / _ Z Casambi
	Materials Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Light Source and electronics 1 x LED 4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,088 m³ Gross weight 3,5 Kg Net weight 1,7 Kg Notes Recessed dimmable driver (2,5 m)	LED IP20 CE UK ERC Ø 7,5 cm
5760	Finishes 18/ _ _ Graphite (ADAPTA RF9913WX) 37/ _ _ Terra Red (NCS S 4040-Y70R) 58/ _ _ Cream (RAL 7044) 62/ _ _ Green (NCS S 3010-G20Y)	LED Colour Temperature /1_ 2700 K - 415 lm E CRI >90	Control 5760 _ _ / 15 Push
	Materials Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Light Source and electronics 1 x LED 4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,088 m³ Gross weight 3,7 Kg Net weight 1,9 Kg Notes Push dimmer on the cable. With plug (4 m)	LED IP20 CE UK ERC Dimmer
5761	Finishes 18/ _ _ Graphite (ADAPTA RF9913WX) 37/ _ _ Terra Red (NCS S 4040-Y70R) 58/ _ _ Cream (RAL 7044) 62/ _ _ Green (NCS S 3010-G20Y)	LED Colour Temperature /1_ 2700 K - 415 lm E CRI >90	Control 5761 _ _ / _ _ __ / _ 1 DALI-2 __ / _ B Push; 1-10V __ / _ Z Casambi
	Materials Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Light Source and electronics 1 x LED 4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,088 m³ Gross weight 3,7 Kg Net weight 1,9 Kg Notes Recessed dimmable driver (2,5 m)	LED IP20 CE UK ERC Ø 7,5 cm

5762

Finishes 18/ _ _ Graphite (ADAPTA RF9913WX) 37/ _ _ Terra Red (NCS S 4040-Y70R) 58/ _ _ Cream (RAL 7044) 62/ _ _ Green (NCS S 3010-G20Y)	LED Colour Temperature /1 _ 2700 K - 415 lm  CRI >90	Control 5762 _ _ / 15 Push
Materials Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Shade: Aluminum. Light Source and electronics 1 x LED 4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,088 m³ Gross weight 3,2 Kg Net weight 2 Kg Notes Push dimmer on the cable. With plug (4 m)	      

5763

Finishes 18/ _ _ Graphite (ADAPTA RF9913WX) 37/ _ _ Terra Red (NCS S 4040-Y70R) 58/ _ _ Cream (RAL 7044) 62/ _ _ Green (NCS S 3010-G20Y)	LED Colour Temperature /1 _ 2700 K - 415 lm  CRI >90	Control 5763 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
Materials Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Shade: Aluminum. Light Source and electronics 1 x LED 4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,088 m³ Gross weight 3,2 Kg Net weight 2 Kg Notes Recessed dimmable driver (2,5 m)	       

5764

Finishes 18/ _ _ Graphite (ADAPTA RF9913WX) 37/ _ _ Terra Red (NCS S 4040-Y70R) 58/ _ _ Cream (RAL 7044) 62/ _ _ Green (NCS S 3010-G20Y)	LED Colour Temperature /1 _ 2700 K - 415 lm  CRI >90	Control 5764 _ _ / 15 Push
Materials Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Light Source and electronics 1 x LED 4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,088 m³ Gross weight 2,45 Kg Net weight 1,25 Kg Notes Push dimmer on the cable. With plug (4 m)	      

5765	18/ __ Graphite (ADAPTA RF9913WX) 37/ __ Terra Red (NCS S 4040-Y70R) 58/ __ Cream (RAL 7044) 62/ __ Green (NCS S 3010-G20Y)	LED Colour Temperature /1 _ 2700 K - 415 lm E CRI >90	Control 5765 __ / __ __ / _ 1 DALI-2 __ / _ B Push; 1-10V __ / _ Z Casambi
	Materials Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Light Source and electronics 1 x LED 4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,088 m³ Gross weight 2,45 Kg Net weight 1,25 Kg Notes Recessed dimmable driver (2,5 m) LED IP20 CE UK EAC Ø 7,5 cm	

5766	18/ __ Graphite (ADAPTA RF9913WX) 37/ __ Terra Red (NCS S 4040-Y70R) 58/ __ Cream (RAL 7044) 62/ __ Green (NCS S 3010-G20Y)	LED Colour Temperature /1 _ 2700 K - 415 lm E CRI >90	Control 5766 __ / 15 Push
	Materials Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Light Source and electronics 1 x LED 4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,088 m³ Gross weight 2,65 Kg Net weight 1,45 Kg Notes Push dimmer on the cable. With plug (4 m) LED IP20 CE UK EAC Dimmer	

5767	18/ __ Graphite (ADAPTA RF9913WX) 37/ __ Terra Red (NCS S 4040-Y70R) 58/ __ Cream (RAL 7044) 62/ __ Green (NCS S 3010-G20Y)	LED Colour Temperature /1 _ 2700 K - 415 lm E CRI >90	Control 5767 __ / __ __ / _ 1 DALI-2 __ / _ B Push; 1-10V __ / _ Z Casambi
	Materials Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Light Source and electronics 1 x LED 4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Packaging 2 Boxes Total Vol 0,088 m³ Gross weight 2,65 Kg Net weight 1,45 Kg Notes Recessed dimmable driver (2,5 cm) LED IP20 CE UK EAC Ø 7,5 cm	



Pendant



5770

Finishes

- 18/ _ _ Graphite
(ADAPTA RF9913WX)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)
- 58/ _ _ Cream
(RAL 7044)
- 62/ _ _ Green
(NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm
E

CRI >90

Control

5770 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Select Electrical connection



Surface

Free Wire

Built-in XS

Remote
Micro

Remote
XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,28 x 0,26 x 0,13 m
Vol 0,01 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes

5770 _ _ / _ 1: DALI-2 **Bi-volt**
5770 _ _ / _ B: Push; 1-10V **Bi-volt**
Extra cable length.

LED IP20 CE UK ENE

5772

Finishes

- 18/ _ _ Graphite
(ADAPTA RF9913WX)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)
- 58/ _ _ Cream
(RAL 7044)
- 62/ _ _ Green
(NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm
E

CRI >90

Control

5772 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Select Electrical connection



Surface

Free Wire

Built-in XS

Remote
Micro

Remote
XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,28 x 0,2 x 0,27 m
Vol 0,015 m³
Gross weight 1,8 Kg Net weight 1,2 Kg

Notes

5772 _ _ / _ 1: DALI-2 **Bi-volt**
5772 _ _ / _ B: Push; 1-10V **Bi-volt**
Extra cable length.

LED IP20 CE UK ENE

5774

18/ _ _ Graphite
(ADAPTA RF9913WX)

37/ _ _ Terra Red
(NCS S 4040-Y70R)

58/ _ _ Cream
(RAL 7044)

62/ _ _ Green
(NCS S 3010-G20Y)

LED Colour Temperature

/1_ 2700 K - 415 lm

E

CRI >90

Control

5774 _ _ / _ _

_ _ / _ 1 DALI-2

_ _ / _ B Push; 1-10V

_ _ / _ Z Casambi

Select Eletrical connection











Surface

Free Wire

Built-in XS

Remote Micro

Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,28 x 0,2 x 0,27 m
Vol 0,015 m³
Gross weight 2 Kg Net weight 1,4 Kg

Notes

5774 _ _ / _ 1: DALI-2

Bi-volt

5774 _ _ / _ B: Push; 1-10V

Bi-volt

Extra cable length.

LED

IP20

CE

UK

ErC

5776

18/ _ _ Graphite
(ADAPTA RF9913WX)

37/ _ _ Terra Red
(NCS S 4040-Y70R)

58/ _ _ Cream
(RAL 7044)

62/ _ _ Green
(NCS S 3010-G20Y)

LED Colour Temperature

/1_ 2700 K - 415 lm

E

CRI >90

Control

5776 _ _ / _ _

_ _ / _ 1 DALI-2

_ _ / _ B Push; 1-10V

_ _ / _ Z Casambi

Select Eletrical connection









Surface

Built-in XS

Remote Micro

Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

1 Box 0,45 x 0,45 x 0,12 m
Vol 0,023 m³
Gross weight 5,5 Kg Net weight 4 Kg

Notes

5776 _ _ / _ 1: DALI-2

Bi-volt

5776 _ _ / _ B: Push; 1-10V

Bi-volt

Extra cable length.

LED

IP20

CE

UK

ErC

356

Product specifications subject to change without notice. Please check vibia.com for updated information.

5778



Finishes

- 18/ _ _ Graphite
(ADAPTA RF9913WX)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)
- 58/ _ _ Cream
(RAL 7044)
- 62/ _ _ Green
(NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm
E

CRI >90

Control

5778 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Select Electrical connection




Surface



Free Wire



Built-in XS



Remote
Micro



Remote
XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,33 x 0,33 x 0,42 m
Vol 0,045 m³
Gross weight 4 Kg Net weight 2,5 Kg

Notes

5778 _ _ / _ 1: DALI-2 **Bi-volt**
5778 _ _ / _ B: Push; 1-10V **Bi-volt**
Extra cable length.

LED IP20 CE UK ENEC

5780



Finishes

- 18/ _ _ Graphite
(ADAPTA RF9913WX)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)
- 58/ _ _ Cream
(RAL 7044)
- 62/ _ _ Green
(NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm
E

CRI >90

Control

5780 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi


Select Electrical connection




Surface



Built-in XS



Remote
Micro



Remote
XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,41 x 0,41 x 0,23 m
Vol 0,038 m³
Gross weight 4 Kg Net weight 2,5 Kg

Notes

5780 _ _ / _ 1: DALI-2 **Bi-volt**
5780 _ _ / _ B: Push; 1-10V **Bi-volt**
Extra cable length.

LED IP20 CE UK ENEC

Select your model at vibia.com and adjust



2 x 5774



3 x 5772



4 x 5770



4 x 5772



5 x 5774



8 x 5770



15 x 5772



8 x 5770




10 x 5774



20 x 5772



16 x 5774




3 x 5770




5 x 5774 From: 3.125,00 €



6 x 5774 From: 3.750,00 €



29 x 5774 From: 18.125,00 €



10 x 5772 From: 6.350,00 €



16 x 5774



5 x 5774



8 x 5774

See more
multiple models
at vibia.com

Finishes 18/ _ _ Graphite (ADAPTA RF9913WX) 37/ _ _ Terra Red (NCS S 4040-Y70R) 58/ _ _ Cream (RAL 7044) 62/ _ _ Green (NCS S 3010-G20Y)	LED Colour Temperature /1 _ 2700 K CRI >90	Control Model _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
---	--	---

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5770, 5772, 5774

Drop ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Match with
fixture finish.

Ø 8 cm
height 6 cm

match with
fixture finish.

Regular ceiling



Ø 16 cm

match with
fixture finish.

Ø 20 cm

you can choose the finish of the
canopy among black, white or any
colour matching one of the Pendant.

Ø 36 cm

Ø 40 cm

For Ref. 5778

Drop ceiling



Ø 3 cm
height 7 cm


for plaster
ceilings.
Black finish.

Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Match with
fixture finish.

Ø 8 cm
height 6 cm

match with
fixture finish.

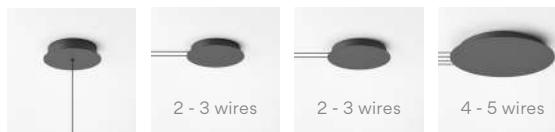

Ø 16 cm

match with
fixture finish.

Ø 20 cm
1-10V; DALI-2


you can choose the finish of the
canopy among black, white or any
colour matching one of the Pendant.

Ø 22 cm
Casambi

Ø 36 cm

For Ref. 5776, 5780

Drop ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Match with
fixture finish.

Ø 8 cm
height 6 cm

match with
fixture finish.



Ø 16 cm

match with
fixture finish.

Remote

Built-in

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Shade: Aluminum. Canopy: Steel.

Notes

Additional cable length from 2 m.



Flat

Design by Ichiro Iwasaki

Flat's distinctive, disc-shaped diffusers form horizontal planes of light that integrate with the surrounding architecture. A study in geometry, the collection creates layers of light that infuse a space with a soothing, Zen sensitivity.

Ceiling



5920

Ø 40 cm



5915

Ø 55 cm



5926

Ø 90 cm



5905

101 x 88 cm



5910

106 x 90 cm



5922

178 x 149 cm



5924

186 x 149 cm

5905

Finishes  10/ _ _ White (NCS S 0300-N)  71/ _ _ White, Green L1, Off-White (NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)	LED Colour Temperature /1 _ 2700 K - 5906 lm  E /3 _ 3500 K - 6344 lm  F CRI >90	Control 5905 _ _ / _ A Push; 1-10V; DALI-2
Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel. Canopy: Aluminum. Light Source and electronics 4 x LED PLATE 13,5 W 700 mA Constant Current 700 mA 110~240V 50/60Hz	Packaging 1 Box 0,75 x 0,45 x 0,25 m Vol 0,0844 m³ Gross weight 17,15 Kg Net weight 15,38 Kg Notes * Electrical connection point	      

5910

Finishes  10/ _ _ White (NCS S 0300-N)  72/ _ _ White, Green L1 (NCS S 0300-N, NCS S 4005-G80Y)  73/ _ _ White, Off-White (NCS S 0300-N, NCS S 1000-N)	LED Colour Temperature /1 _ 2700 K - 4430 lm  E /3 _ 3500 K - 4758 lm  F CRI >90	Control 5910 _ _ / _ A Push; 1-10V; DALI-2
Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel. Canopy: Aluminum. Light Source and electronics 3 x LED PLATE 13,5 W 700 mA Constant Current 700 mA 110~240V 50/60Hz	Packaging 1 Box 0,80 x 0,70 x 0,30 m Vol 0,1680 m³ Gross weight 11,90 Kg Net weight 9,10 Kg Notes * Electrical connection point	      

5915

Finishes  10/ _ _ White (NCS S 0300-N)	LED Colour Temperature /1 _ 2700 K - 2953 lm  E /3 _ 3500 K - 3172 lm  F CRI >90	Control 5915 10 / _ A Push; 1-10V; DALI-2
Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel. Canopy: Aluminum. Light Source and electronics 2 x LED PLATE 13,5 W 700 mA Constant Current 700 mA 110~240V 50/60Hz	Packaging 1 Box 0,65 x 0,65 x 0,25 m Vol 0,0106 m³ Gross weight 6,80 Kg Net weight 4,73 Kg Notes * Electrical connection point	       

5920	Finishes 10/ __ White (NCS S 0300-N) 13/ __ Off-White (NCS S 1000-N) 47/ __ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 __ 2700 K - 1740 lm /3 __ 3500 K - 1868 lm E CRI >90	Control 5920 __ / __ __ / __ 1 DALI-2 __ / __ B Push; 1-10V
	Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel. Canopy: Aluminum. Light Source and electronics 1 x LED PLATE 13,5 W 700 mA Constant Current 700 mA 110~240V 50/60Hz	Packaging 1 Box 0,45 x 0,45 x 0,25 m Vol 0,0051 m³ Gross weight 3,10 Kg Net weight 1,91 Kg Notes * Electrical connection point LED  IP20     Dimmer 	

5922	Finishes 10/ __ White (NCS S 0300-N) 71/ __ White, Green L1, Off-White (NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)	LED Colour Temperature /1 __ 2700 K - 13920 lm /3 __ 3500 K - 14951 lm D CRI >90	Control 5922 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel. Canopy: Aluminum. Light Source and electronics 4 x LED PLATE 25 W 700mA Constant Current 700 mA 110~240V 50/60Hz	Packaging 1 Box 1,35 x 1,20 x 0,30 m Vol 0,0486 m³ Gross weight 26,60 Kg Net weight 19,98 Kg Notes * Electrical connection point LED  IP20     Dimmer	

5924	Finishes 10/ __ White (NCS S 0300-N) 72/ __ White, Green L1 (NCS S 0300-N, NCS S 4005-G80Y) 73/ __ White, Off-White (NCS S 0300-N, NCS S 1000-N)	LED Colour Temperature /1 __ 2700 K - 9897 lm /3 __ 3500 K - 10630 lm D E CRI >90	Control 5924 __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel. Canopy: Aluminum. Light Source and electronics 3 x LED PLATE 25 W 700mA Constant Current 700 mA 110~240V 50/60Hz	Packaging 1 Box 1,45 x 1,10 x 0,25 m Vol 0,0399 m³ Gross weight 27 Kg Net weight 20,80 Kg Notes * Electrical connection point LED  IP20     Dimmer	

5926

Finishes
 10/ _ _ White
 (NCS S 0300-N)

LED Colour Temperature
 /1 _ 2700 K - 6598 lm
☐
 /3 _ 3500 K - 7086 lm
☐
 CRI >90

Control
 5926 10 / _ A Push; 1-10V; DALI-2

Materials
 Shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 2 x LED PLATE 25 W 700 mA
 Constant Current 700 mA
 110~240V 50/60Hz

Packaging
 1 Box 1,05 x 1,05 x 0,25 m
 Vol 0,0276 m³
 Gross weight 14,60 Kg Net weight 10,08 Kg

Notes
 * Electrical connection point

LED ☐ ☐ IP20 CE UK ENE ☐ Dimmer



Pendant






5930
Ø 90 cm



5935
Ø 40 cm



5940
Ø 55 cm



5930

Finishes
13/ _ _ Off-White
(NCS S 1000-N)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9897 lm
D
/3 _ 3500 K - 10630 lm
E
CRI >90

Control
5930 _ _ / _ _
_ _ / _ A Push; 1-10V; DALI-2
_ _ / _ Z Casambi

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics
3 x LED PLATE 25 W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,96x0,96x0,50 m
Vol 0,4608 m³
Gross weight 27,9 Kg Net weight 22 Kg

Notes
Adjust the height on installation

LED IP20 CE UK ENE Dimmer

5935



Finishes
13/ _ _ Off-White
(NCS S 1000-N)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1740 lm
/3 _ 3500 K - 1868 lm
E
CRI >90

Control
5935 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics
1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,71 x 0,13 x 0,71 m
Vol 0,0655 m³
Gross weight 6,10 Kg Net weight 5 Kg

Notes
Extra cable length.

LED IP20 CE UK ENE Dimmer

5940



Finishes
13/ _ _ Off-White
(NCS S 1000-N)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1740 lm
/3 _ 3500 K - 1868 lm
E
CRI >90

Control
5940 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.


Light Source and electronics
1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,71 x 0,13 x 0,71 m
Vol 0,0665 m³
Gross weight 7 Kg Net weight 6 Kg

Notes
Extra cable length.

LED IP20 CE UK ENE Dimmer


Select your model at vibia.com and adjust



2 x 5935



2 x 5935



3 x 5935



3 x 5935



4 x 5935



4 x 5935




4 x 5935



5 x 5935



8 x 5935



8 x 5935




9 x 5935



9 x 5935



18 x 5935



16 x 5935

See more
multiple models
at vibia.com

Finishes ● 13/ _ _ Off-White (NCS S 1000-N) ● 37/ _ _ Terra Red (NCS S 4040-Y70R) ● 47/ _ _ Green L1 (NCS S 4005-G80Y)		LED Colour Temperature /1 _ 2700 K /3 _ 3500 K CRI >90	Control Model _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)			

Select Electrical connection


For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5935

Drop ceiling




Regular ceiling

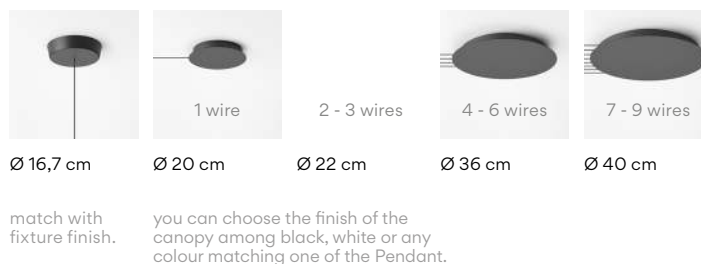


For Ref. 5940 _ _ / _ 1 / _ B

Drop ceiling

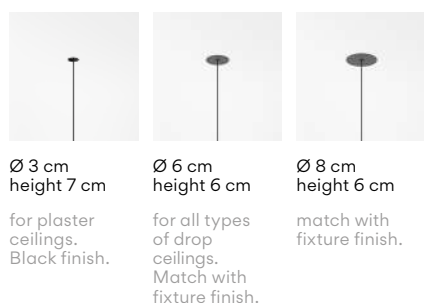


Regular ceiling

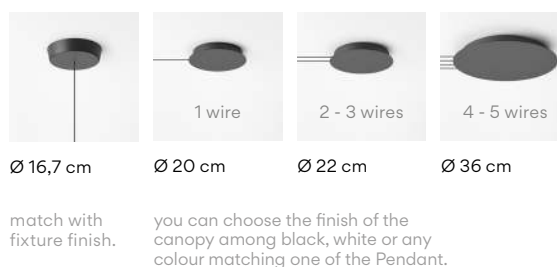


For Ref. 5940 _ _ / _ Z

Drop ceiling

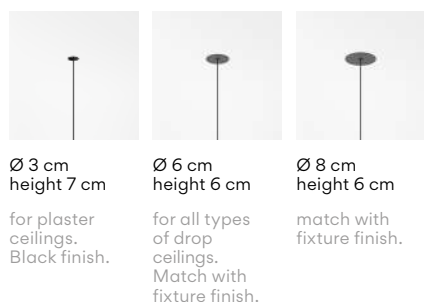

Regular ceiling

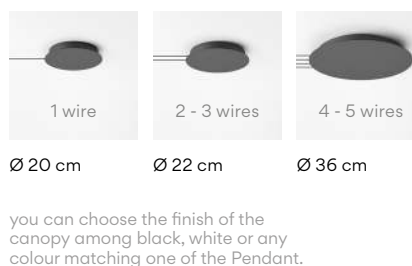

Remote

Built-in

Materials

Shade: Aluminum. Diffuser: PC- Polycarbonate.
Structures: Steel. Canopy: Aluminum

Notes

Additional cable length
from 2 m.




Floor



5945
76 x 64 x 90 cm



5950
Ø 55 x 43 cm

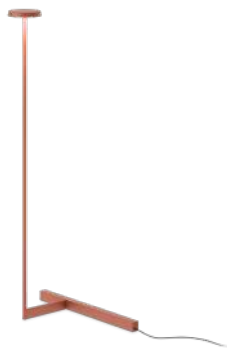

5955
46 x 25 x 100 cm



5957
48 x 35 x 96 cm

5945	Finishes 13/ _ _ Off-White (NCS S 1000-N) 47/ _ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 1365 lm /3 _ 3500 K - 1467 lm F CRI >90	Control 5945 _ _ / _ 5 Push (with or without memory)
	Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel. Light Source and electronics 2 x LED PLATE 7 W 400 mA Constant Voltage 24V 110~240V 50/60Hz	Packaging 1 Box 0,65 x 1,00 x 0,25 m Vol 0,0163 m³ Gross weight 15,85 Kg Net weight 15,25 Kg Notes Electric cable 2 m	LED IP20 CE UK ERC Dimmer Multi-volt
5950	Finishes 10/ _ _ White (NCS S 0300-N)	LED Colour Temperature /1 _ 2700 K - 682 lm /3 _ 3500 K - 733 lm F CRI >90	Control 5950 10 / _ 5 Push (with or without memory)
	Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel. Light Source and electronics 1 x LED PLATE 7 W 400 mA Constant Voltage 24V 110~240V 50/60Hz	Packaging 1 Box 0,65 x 0,65 x 0,20 m Vol 0,0085 m³ Gross weight 14,60 Kg Net weight 12,71 Kg Notes Electric cable 2 m	LED IP20 CE UK ERC Dimmer Multi-volt



5955

Finishes
 ● **11/** _ _ Black
 (NCS S 8500-N)
 ● **37/** _ _ Terra Red
 (NCS S 4040-Y70R)
 ● **47/** _ _ Green L1
 (NCS S 4005-G80Y)

LED Colour Temperature
 /1 _ 2700 K - 682 lm
 /3 _ 3500 K - 733 lm
 F > 90
 CRI >90

Control
5955 _ _ / _ 5 Push
 (with or without memory)

Materials
 Shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.

Light Source and electronics
 1 x LED PLATE 7 W 400 mA
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging
 1 Box 0,30 x 1,10 x 0,10 m
 Vol 0,0033 m³
 Gross weight 4,80 Kg Net weight 3,50 Kg

Notes
 Electric cable 2 m

LED IP20 CE UK ENE Dimmer Multi-volt

5957

Finishes
 ● **13/** _ _ Off-White
 (NCS S 1000-N)
 ● **37/** _ _ Terra Red
 (NCS S 4040-Y70R)
 ● **47/** _ _ Green L1
 (NCS S 4005-G80Y)

LED Colour Temperature
 /1 _ 2700 K - 682 lm
 /3 _ 3500 K - 733 lm
 F > 90
 CRI >90

Control
5957 _ _ / _ 5 Push
 (with or without memory)

Materials
 Shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.

Light Source and electronics
 1 x LED PLATE 7 W 400 mA
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging
 1 Box 0,40 x 1,10 x 0,10 m
 Vol 0,0044 m³
 Gross weight 6,10 Kg Net weight 4,46 Kg

Notes
 Electric cable 2 m

LED IP20 CE UK ENE Dimmer Multi-volt

Table



5965
35 x Ø 30 x 16 cm



5970
29 x 17 x 30 cm



5972
11 x 30 cm

Bolt-down



5965	Finishes 13/ __ Off-White (NCS S 1000-N) 47/ __ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 682 lm F CRI >90	Control 5965 __ /15 Push (with or without memory)
	Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel. Light Source and electronics 1 x LED PLATE 7W 400mA Constant Voltage 24V 110~240V 50/60Hz	Packaging 1 Box 0,50 x 0,50 x 0,7 m Vol 0,0018 m³ Gross weight 4 Kg Net weight 3,11 Kg Notes Electric cable 2 m LED IP20 Dimmer Multi-volt	
5970	Finishes 11/ __ Black (NCS S 8500-N) 37/ __ Terra Red (NCS S 4040-Y70R) 47/ __ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 682 lm F CRI >90	Control 5970 __ /15 Push (with or without memory)
	Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel. Light Source and electronics 1 x LED PLATE 7W 400mA Constant Voltage 24V 110~240V 50/60Hz	Packaging 1 Box 0,20 x 0,40 x 0,07 m Vol 0,0072 m³ Gross weight 4 Kg Net weight 3,11 Kg Notes Electric cable 2 m LED IP20 Dimmer Multi-volt	
5972	Finishes 11/ __ Black (NCS S 8500-N) 37/ __ Terra Red (NCS S 4040-Y70R) 47/ __ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1 _ 2700 K - 682 lm F CRI >90	Control 5972 __ /15 Push (with or without memory)
	Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel. Light Source and electronics 1 x LED PLATE 7W 400mA Constant Voltage 24V 110~240V 50/60Hz	Packaging 1 Box 0,15 x 0,13 x 0,36 m Vol 0,00702 m³ Gross weight 0,9 Kg Net weight 0,6 Kg Notes Electric cable 2 m LED IP20 Dimmer Multi-volt	

Spa

Design by Ramos & Bassols

Spa is the perfect lighting solution for any wellness space. From public dressing rooms, restaurants and spas, to private kitchens, corridors and bathrooms, its graceful simplicity allows for easy cleaning and seamless integration within the surrounding architecture of a variety of interiors.

Ceiling Wall



5975



5977



5979



5981




5983



5985

5975



Finishes	LED Colour Temperature
● 11/ _ Black (NCS S 8500-N)	/1 _ 2700 K - 1560 lm
● 23/ _ Warm White (NCS S 0502-Y50R)	/3 _ 3500 K - 1290 lm
● 25/ _ Beige D1 (NCS S 4005-Y50R)	E >90

Control

5975 _ / _	
_ / _ 1	DALI-2
_ / _ 3	1-10V
_ / _ Z _ 30	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics


1 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging

1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

LED IP44 CE UK ENE Dimmer

5977



Finishes	LED Colour Temperature
● 11/ _ Black (NCS S 8500-N)	/1 _ 2700 K - 2560 lm
● 23/ _ Warm White (NCS S 0502-Y50R)	/3 _ 3500 K - 3360 lm
● 25/ _ Beige D1 (NCS S 4005-Y50R)	E >90

Control

5977 _ / _	
_ / _ 1	DALI-2
_ / _ 3	1-10V
_ / _ Z _ 30	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics


1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging

1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6

LED IP44 CE UK ENE Dimmer

5979



Finishes	LED Colour Temperature
● 11/ _ Black (NCS S 8500-N)	/1 _ 2700 K - 3840 lm
● 23/ _ Warm White (NCS S 0502-Y50R)	/3 _ 3500 K - 5040 lm
● 25/ _ Beige D1 (NCS S 4005-Y50R)	E >90

Control

5979 _ / _	
_ / _ 1	DALI-2
_ / _ 3	1-10V
_ / _ Z _ 30	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics


1 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging

1 Box 3,3 x 0,1 x 0,1 m
Vol 0,033 m³
Gross weight 6,9 Kg Net weight 3,6 Kg

LED IP44 CE UK ENE Dimmer


5981



Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K - 3120 lm	5981 _ _ / _ _
● 23/ _ _ Warm White (NCS S 0502-Y50R)	/3 _ 3500 K - 3840 lm	_ _ / _ 1 DALI-2
● 25/ _ _ Beige D1 (NCS S 4005-Y50R)	CRI >90	_ _ / _ 3 1-10V
		_ _ / _ Z _ 30 Casambi (Remote)

Materials	Packaging
Profile and canopy: Aluminum. Difuser: PMMA.	2 Boxes Total Vol 0,030 m³ Gross weight 5,8 Kg Net weight 2,8 Kg
Light Source and electronics 2 x LED STRIP 10,8 W 600 mA Constant Current 600 mA 220~240V 50/60Hz	LED ⓘ IP44 CE UK ⚡ Dimmer


5983



Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K - 5120 lm	5983 _ _ / _ _
● 23/ _ _ Warm White (NCS S 0502-Y50R)	/3 _ 3500 K - 6720 lm	_ _ / _ 1 DALI-2
● 25/ _ _ Beige D1 (NCS S 4005-Y50R)	CRI >90	_ _ / _ 3 1-10V
		_ _ / _ Z _ 30 Casambi (Remote)

Materials	Packaging
Profile and canopy: Aluminum. Difuser: PMMA.	2 Boxes Total Vol 0,046 m³ Gross weight 9,4 Kg Net weight 4,8 Kg
Light Source and electronics 2 x LED STRIP 21,6 W 600 mA Constant Current 1200 mA 220~240V 50/60Hz	Notes 5983 _ _ / _ 1: DALI-2 ⓘ Multi-volt
	LED ⓘ IP44 CE UK ⚡ Dimmer

5985



Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K - 7680 lm	5985 _ _ / _ _
● 23/ _ _ Warm White (NCS S 0502-Y50R)	/3 _ 3500 K - 10080 lm	_ _ / _ 1 _ 30 DALI-2 (Remote)
● 25/ _ _ Beige D1 (NCS S 4005-Y50R)	CRI >90	_ _ / _ 3 _ 30 1-10V (Remote)
		_ _ / _ Z _ 30 Casambi (Remote)

Materials	Packaging
Profile and canopy: Aluminum. Difuser: PMMA..	3 Boxes Total Vol 0,066 m³ Gross weight 13,5 Kg Net weight 6,9 Kg
Light Source and electronics 2 x LED STRIP 32,4 W 600 mA Constant Current 600 mA Remote 220~240V 50/60Hz	LED ⓘ IP44 CE UK ⚡ Dimmer

Wall Vanity light



5987




5989



5991

5987



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **23/** _ _ Warm White
(NCS S 0502-Y50R)
- **25/** _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 1560 lm
- /3** _ 3500 K - 1920 lm
- E** >90

Control

- 5987** _ _ / _ _
- _ _ / **1** DALI-2
 - _ _ / **3** 1-10V
 - _ _ / **Z** **30** Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

1 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging


1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

Notes

Central canopy with module LED inclined 30°

LED IP44 CE UK E Dimmer

5989



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **23/** _ _ Warm White
(NCS S 0502-Y50R)
- **25/** _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

- /1** _ 2700 K - 2560 lm
- /3** _ 3500 K - 3360 lm
- E** >90

Control

- 5989** _ _ / _ _
- _ _ / **1** DALI-2
 - _ _ / **3** 1-10V
 - _ _ / **Z** **30** Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging


1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6 Kg

Notes

Central canopy with module LED inclined 30°

LED IP44 CE UK E Dimmer

5991



Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K - 3840 lm	5991 _ _ / _ _
● 23/ _ _ Warm White (NCS S 0502-Y50R)	/3 _ 3500 K - 5040 lm	_ _ / _ 1 DALI-2
● 25/ _ _ Beige D1 (NCS S 4005-Y50R)	E >90	_ _ / _ 3 1-10V
		_ _ / _ Z _ 30 Casambi (Remote)

Materials
Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics
1 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging
1 Box 3,3 x 0,1 x 0,1 m
Vol 0,033 m³
Gross weight 6,9 Kg Net weight 3,6 Kg

Notes
Central canopy with module LED inclined 30°

LED IP44 CE UK ENE Dimmer



Vertical Wall



5993

Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 25/ _ _ Beige D1 (NCS S 4005-Y50R)	/1 _ 2700 K - 1560 lm /3 _ 3500 K - 1920 lm	5993 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z _ 30 Casambi (Remote)
Materials Profile and canopy: Aluminum. Difuser: PMMA.		
Light Source and electronics 1 x LED STRIP 10,8W 600 mA Constant Current 600 mA 220~240V 50/60Hz		
Packaging 1 Box 1,5 x 0,1 x 0,1 m Vol 0,015 m³ Gross weight 3,1 Kg Net weight 1,6 Kg		
LED IP44 Dimmer		

5995

Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 23/ _ _ Warm White (NCS S 0502-Y50R) 25/ _ _ Beige D1 (NCS S 4005-Y50R)	/1 _ 2700 K - 2560 lm /3 _ 3500 K - 3360 lm	5995 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z _ 30 Casambi (Remote)
Materials Profile and canopy: Aluminum. Difuser: PMMA.		
Light Source and electronics 1 x LED STRIP 21,6 W 600 mA Constant Current 600 mA 220~240V 50/60Hz		
Packaging 1 Box 2,3 x 0,1 x 0,1 m Vol 0,023 m³ Gross weight 4,9 Kg Net weight 2,6 Kg		
LED IP44 Dimmer		

Suite

Design by Jordi Vilardell & Meritxell Vidal

Reinterprets and updates the traditional combination of side table or shelf with table lamp. Its warm and comfortable lighting effect appears when least expected, a pleasant luminous surprise.

Floor Table



6006	Finishes ● 14/ _ _ Chocolate (RAL 8019) ● 23/ _ _ Warm White (NCS S 0502-Y50R) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 1539 lm F > CRI >90	Control 6006 _ _ /15 Push (with or without memory)
	Materials Shelf: Aluminum. Diffuser: PC- Polycarbonate. Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass. Light Source and electronics 8 x LED STRIP 24V 1,63 W. 1 x LED 4,5 W 350 mA Constant Current / Constant Voltage 350 24V 220~240V 50Hz		Packaging 1 Box 0,730 x 0,535 x 1,385 m Vol 0,4513 m³ Gross weight 34,3 Kg Net weight 16,7 Kg Notes Glass diffuser mounted on shelf with dimmable light. USB charging connection. LED On/ Off switch under the shelf. Electric cable 2,5 m. LED IP20 CE UK ENEC Dimmer

6007

- Finishes**
- **14/** _ _ Chocolate (RAL 8019)
 - **23/** _ _ Warm White (NCS S 0502-Y50R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1539 lm

CRI >90

Control
6007 _ _ /15 Push
(with or without memory)

Materials
Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Vertical tube: Steel.
Base: Steel.
Lid: ABS with fiberglass.

Light Source and electronics
8 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,4513 m³
Gross weight 34,3 Kg Net weight 17 Kg

Notes
Reading light mink (Pantone 407C), mounted on shelf with dimmable light.
USB charging connection.
LED On/ Off switch under the shelf.
Electric cable 2,5 m.

6011

- Finishes**
- **14/** _ _ Chocolate (RAL 8019)
 - **23/** _ _ Warm White (NCS S 0502-Y50R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 790 lm

CRI >90

Control
6011 _ _ /15 Push
(with or without memory)

Materials
Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Vertical tube: Steel.
Base: Steel.
Lid: ABS with fiberglass.

Light Source and electronics
6 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,3623 m³
Gross weight 32,4 Kg Net weight 15,7 Kg

Notes
Glass diffuser mounted on shelf with dimmable light.
USB charging connection.
LED On/ Off switch under the shelf.
Electric cable 2,5 m

6012

- Finishes**
- **14/** _ _ Chocolate (RAL 8019)
 - **23/** _ _ Warm White (NCS S 0502-Y50R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1275 lm

CRI >90

Control
6012 _ _ /15 Push
(with or without memory)

Materials
Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Vertical tube: Steel.
Base: Steel.
Lid: ABS with fiberglass.

Light Source and electronics
6 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,3623 m³
Gross weight 33,6 Kg Net weight 16 Kg

Notes
Reading light mink (Pantone 407C), mounted on shelf with dimmable light.
USB charging connection.
LED On/ Off switch under the shelf.
Electric cable 2,5 m

Wall



6040
32 x 14 x 16 cm



6041
32 x 14 x 16 cm



6045
32 x 29 x 16 cm



6046
32 x 29 x 16 cm

6040	Finishes ● 14/ _ _ Chocolate (RAL 8019) ● 23/ _ _ Warm White (NCS S 0502-Y50R) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1_ 2700 K - 485 lm E CRI >90 /3_ 3500 K - 184 lm F CRI >80	Control 6040 _ / _ 0 On/ Off
	Materials Shelf: Aluminum. Diffuser: Blown-glass. Lid: Steel. Light Source and electronics 1 x LED 4,5 W 350 mA Constant Current 350 mA 220~240V 50Hz	Packaging 1 Box 0,21 x 0,48 x 0,21 m Vol 0,0212 m³ Gross weight 2,6 Kg Net weight 1,6 Kg LED IP20 CE UK ENEC	
6041	Finishes ● 14/ _ _ Chocolate (RAL 8019) ● 23/ _ _ Warm White (NCS S 0502-Y50R) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1_ 2700 K - 485 lm E CRI >90 /3_ 3500 K - 184 lm F CRI >80	Control 6041 _ / _ 0 On/ Off
	Materials Shelf: Aluminum. Diffuser: Blown-glass. Lid: Steel. Light Source and electronics 1 x LED 4,5 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Packaging 1 Box 0,21 x 0,48 x 0,21 m Vol 0,0212 m³ Gross weight 2,6 Kg Net weight 1,6 Kg LED IP20 CE UK ENEC	

6045

Finishes
 ● **14/** _ _ Chocolate
 (RAL 8019)
 ● **23/** _ _ Warm White
 (NCS S 0502-Y50R)
Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 616 lm
E
 CRI >90
/3 _ 3500 K - 184 lm
F
 CRI >80

Control
6045 _ _ / _ 0 On/ Off

Materials
 Shelf: Aluminum.
 Diffuser: PC- Polycarbonate.
 Lid: Steel.

Light Source and electronics
 1 x LED STRIP 24V 1,63W.
 1 x LED 4,5W 350mA.
 Constant Current / Constant Voltage 350 24V
 220~240V 50Hz

Packaging
 1 Box 0,29 x 0,38 x 0,38 m
 Vol 0,418 m³
 Gross weight 2,6 Kg Net weight 1,8 Kg

Notes
 Reading light mink (Pantone 407C),
 mounted on shelf with dimmable light.

LED ☐ ☒ IP20 CE UK ENEC

6046

Finishes
 ● **14/** _ _ Chocolate
 (RAL 8019)
 ● **23/** _ _ Warm White
 (NCS S 0502-Y50R)
Finish customization
 (Available options:
 Vibia colour palette.
 Minimum quantity
 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 616 lm
E
 CRI >90
/3 _ 3500 K - 184 lm
F
 CRI >80

Control
6046 _ _ / _ 0 On/ Off

Materials
 Shelf: Aluminum.
 Diffuser: PC- Polycarbonate.
 Lid: Steel.

Light Source and electronics
 1 x LED STRIP 24V 1,63W.
 1 x LED 4,5W 350mA.
 Constant Current / Constant Voltage 350 24V
 220~240V 50Hz

Packaging
 1 Box 0,29 x 0,38 x 0,38 m
 Vol 0,418 m³
 Gross weight 2,6 Kg Net weight 1,8 Kg

Notes
 Reading light mink (Pantone 407C),
 mounted on shelf with dimmable light.

LED ☐ ☒ IP20 CE UK ENEC

Wall



6050

12 x 12 x 10 cm

6050

Finishes
 ● **23/** _ _ Warm White
 (NCS S 0502-Y50R)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
 CRI >90

Control
6050 / 10 On/ Off

Materials
 Wall support: Aluminum.
 Diffuser: Blown-glass

Light Source and electronics
 1 x LED 4,5W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging
 1 Box 0,13 x 0,20 x 0,21 m
 Vol 0,00055 m³
 Gross weight 0,6 Kg Net weight 0,4 Kg

LED ☐ ☒ IP20 CE UK ENEC Bi-volt

Tube Free

Design by Ichiro Iwasaki


With the Tube ceiling collection, Ichiro Iwasaki endeavours to create a lighting system capable of forming distinctive expressions by reconfiguring the different constituent parts. By combining three different diameter shades, six colour tones and a rhythm of differing heights, Tube creates a unique landscape of luminaires overhead.

Ceiling

Built-in

6095

Ø 22 cm



6100

Ø 28,5 cm



6105

Ø 41 cm



6095

Finishes

- **15/** _ _ Grey L2
(NCS S 2500-N)
- **10/** _ _ White
(NCS S 0300-N)
- **16/** _ _ Grey M1
(NCS S 4500-N)
- **21/** _ _ Black Grey
(NCS S 7000-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)

Finish customization

(Available options:
Vibia colour palette.

Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1 _ 2700 K - 1170 lm
- /2 _ 3000 K - 1251 lm
- /3 _ 3500 K - 1251 lm



CRI >90

Control

6095 _ _ / _ _

_ _ / _ **A** _ **32** Push; 1-10V;
DALI-2 (Remote)

_ _ / _ **Z** _ **32** Casambi (Remote)

Materials

Diffuser: PC- Polycarbonate.

Led support: Aluminum.

Shade: Aluminum.

Canopy: ABS.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 10,5 W 15 V

Constant Current 700 mA


110-240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m

Vol 0,017576 m³

Gross weight 1,6 Kg Net weight 0,8 Kg



6100

Finishes

- 15/ _ _ Grey L2
(NCS S 2500-N)
- 10/ _ _ White
(NCS S 0300-N)
- 16/ _ _ Grey M1
(NCS S 4500-N)
- 21/ _ _ Black Grey
(NCS S 7000-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1476 lm
E

/2 _ 3000 K - 1521 lm
/3 _ 3500 K - 1550 lm
F

CRI >90

Control

6100 _ _ / _ A Push; 1-10V;
DALI-2

Materials

Diffuser: PC- Polycarbonate.
Led support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,40 x 0,40 x 0,35 m
Vol 0,056 m³
Gross weight 4,5 Kg Net weight 2,5 Kg

LED IP20 CE UK ENE Bi-volt

6105

Finishes

- 15/ _ _ Grey L2
(NCS S 2500-N)
- 10/ _ _ White
(NCS S 0300-N)
- 16/ _ _ Grey M1
(NCS S 4500-N)
- 21/ _ _ Black Grey
(NCS S 7000-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2413 lm
/2 _ 3000 K - 2485 lm
/3 _ 3500 K - 2533 lm
E

CRI >90

Control

6105 _ _ / _ A Push; 1-10V;
DALI-2

Materials

Diffuser: PC- Polycarbonate.
Led support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 20 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,40 m
Vol 0,144 m³
Gross weight 5,5 Kg Net weight 3,5 Kg

LED IP20 CE UK ENE Bi-volt


Pendant



6160
Ø 22 cm



6165
Ø 28,5 cm



6160

- Finishes**
- 10/ _ _ White (NCS S 0300-N)
 - 15/ _ _ Grey L2 (NCS S 2500-N)
 - 16/ _ _ Grey M1 (NCS S 4500-N)
 - 21/ _ _ Black Grey (NCS S 7000-N)
 - 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)

Finish customization

(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1170 lm
/2 _ 3000 K - 1251 lm
/3 _ 3500 K - 1251 lm

E

CRI >90

Control

6160 _ _ / _ _

- _ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

Materials

Diffuser: PC- Polycarbonate. Shade: Aluminum.
Led support: Aluminum. Tube: Steel. Canopy: Steel.

Light Source and electronics

1 x LED PLATE 10,5 W 15 V
Constant Current 700 mA
110~240V 50/60Hz

Packaging

Total Vol 0,04 m3
Gross weight 4,40 Kg Net weight 2,15 Kg

Notes

6160 _ _ / _ 1: DALI-2 **Bi-volt**
6160 _ _ / _ B: Push; 1-10V **Bi-volt**
Extra cable length.

LED IP20 CE ENEC ENEC

6165

- Finishes**
- 10/ _ _ White (NCS S 0300-N)
 - 15/ _ _ Grey L2 (NCS S 2500-N)
 - 16/ _ _ Grey M1 (NCS S 4500-N)
 - 21/ _ _ Black Grey (NCS S 7000-N)
 - 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)

Finish customization

(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1170 lm
/2 _ 3000 K - 1251 lm
/3 _ 3500 K - 1251 lm

E

CRI >90

Control

6165 _ _ / _ _

- _ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

Materials

Diffuser: PC- Polycarbonate. Shade: Aluminum.
Led support: Aluminum. Tube: Steel. Canopy: Steel.

Light Source and electronics

1 x LED PLATE 10,5 W 15 V
Constant Current 700 mA
110~240V 50/60Hz

Packaging

Total Vol 0,04 m3
Gross weight 4,40 Kg Net weight 2,15 Kg

Notes


6165 _ _ / _ 1: DALI-2 **Bi-volt**
6165 _ _ / _ B: Push; 1-10V **Bi-volt**
Extra cable length.

LED IP20 CE ENEC ENEC

Select your model at vibia.com and adjust



2 x 6160



2 x 6165 + 1 x 6160



4 x 6165



4 x 6160




5 x 6165



7 x 6165



8 x 6160




8 x 6165



10 x 6160



19 x 6160



24 x 6165




3 x 6165



5 x 6165



6 x 6165



29 x 6160



10 x 6160



16 x 6160



5 x 6165



8 x 6160

See more
multiple models
at vibia.com

Finishes 10/ _ _ White (NCS S 0300-N) 15/ _ _ Grey L2 (NCS S 2500-N) 16/ _ _ Grey M1 (NCS S 4500-N) 21/ _ _ Black Grey (NCS S 7000-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R)	Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K /2 _ 3000 K /3 _ 3500 K CRI >90	Control Model _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ B Push; 1-10V _ _ / _ Z Casambi
---	---	---	--

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 6160, 6165

Drop ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.


Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Match with
fixture finish.

Ø 8 cm
height 6 cm

match with
fixture finish.

Regular ceiling

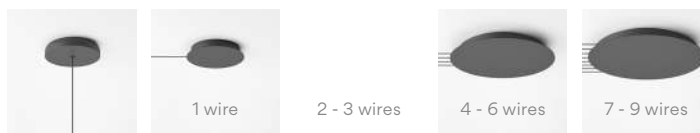

Ø 16,8 cm

Black finish.

Ø 20 cm

you can choose the finish of the
canopy among black, white or any
colour matching one of the Pendant.

2 - 3 wires

Ø 22 cm

4 - 6 wires

Ø 36 cm

7 - 9 wires

Ø 40 cm

Remote

Built-in

Materials

Diffuser: PC- Polycarbonate. Shade: Aluminum.
Led support: Aluminum. Tube: Steel. Canopy: Steel.

Notes

Additional cable length from 2 m.

LED IP20 CE UK ENE Bi-volt

Plusminus⁺⁻





Easy to design and install

Compose a personalised Plusminus at vibia.com


From scratch

From a layout



- + Create and compose projects in detail.
- + Draw and customise in 3D to see it in space.
- + Or customise it step by step without drawing.

- + Customise and adapt it to the needs of your project.
- + Add it to your project and edit it at any time.
- + More than 100 creations for you.

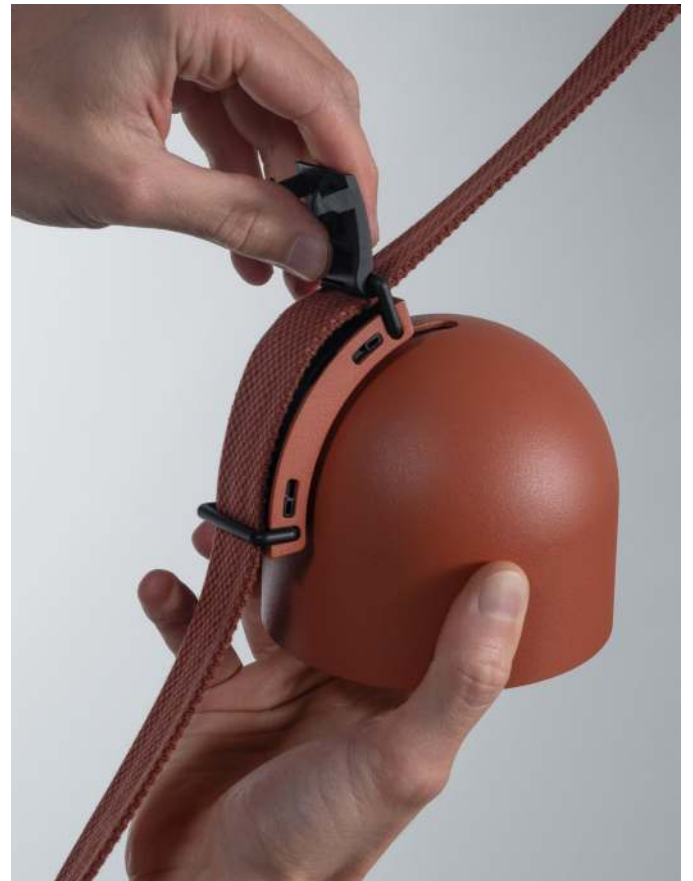

Easy connection
Fix / Click / Connect

Luminaire types and lighting effects



Sphere



Volumetric Diffuser

distributes light equally in all directions (360°). It attracts a relaxed gaze towards the point of light, and creates a calm, very comfortable atmosphere. The light sphere bathes all surfaces of the space, producing a peaceful, richer and extremely homogenous ambience.



Semisphere



Hidden Diffuser

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.



Cone



Hidden Diffuser

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.

Spotlight

15°
33°
49°

Flat diffuser

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. It is ideal for reading situations or when the light output is visible, as it does not produce glare.

Accent light

emphasizes objects or architectural elements with intensive cones of light. Luminance contrasts attract the eye and bring the illuminated objects into the foreground. The light output is directed towards the object or architectural element and not towards the person, in order to avoid glare.



Linear Diffuser

General lighting

provides a high degree of uniformity on the horizontal plane and generates a first layer of illumination on which to add more specific lighting applications. It generates soft shadows and subdued brightness in which the space and its component elements do not display visual hierarchies.



Linear Low UGR

UGR<19

Linear High Efficiency Low Glare

offers medium brightness and clarity of forms. Direct illumination, extended beam and luminaire performance enable installations with high-energy efficiencies and low-glare levels below UGR<19.

Linear High Comfort Low Glare

provides high levels of illumination and comfort with UGR levels below 19. It is also ideal for work or meeting areas.



Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website vibia.com

Sphere



6230

Ø 20 cm



6235

Ø 30 cm

6230	Finishes	LED Colour Temperature	Control
	11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 42/ _ _ Blue M1 (NCS S 5010-B10G) 53/ _ _ Green M1 (NCS S 6005-G80Y)	/1 _ 2700 K - 846 lm /2 _ 3000 K - 884 lm /3 _ 3500 K - 916 lm E CRI >90	6230 _ _ / _ _ _ _ / _ 0 On/Off _ _ / _ F Simultaneous line Push; 1-10V; Casambi; DALI _ _ / _ Z Casambi integrated on each individual luminaire (P2P)
	Materials		Packaging
	Diffuser: Triplex opal glass. Body: Aluminum. Light Source and electronics 1 x LED 7,9 W 450 mA		1 Box 0,26 x 0,26 x 0,260 m Vol 0,0175 m³ Gross weight 1,56 Kg Net weight 0,93 Kg LED IP20 CE UK ENEC Dimmer
6235	Finishes	LED Colour Temperature	Control
	11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 42/ _ _ Blue M1 (NCS S 5010-B10G) 53/ _ _ Green M1 (NCS S 6005-G80Y)	/1 _ 2700 K - 1492 lm /2 _ 3000 K - 1569 lm /3 _ 3500 K - 1606 lm F CRI >90	6235 _ _ / _ _ _ _ / _ 0 On/Off _ _ / _ F Simultaneous line Push; 1-10V; Casambi; DALI _ _ / _ Z Casambi integrated on each individual luminaire (P2P)
	Materials		Packaging
	Diffuser: Triplex opal glass. Body: Aluminum. Light Source and electronics 1 x LED 16 W 850 mA		1 Box 0,364 x 0,364 x 0,364 m Vol 0,0482 m³ Gross weight 2,50 Kg Net weight 1,80 Kg LED IP20 CE UK ENEC Dimmer

Semisphere



6220
Ø 20 cm



6225
Ø 30 cm

6220

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **37/** _ _ Terra Red
(NCS S 4040-Y70R)
 - **42/** _ _ Blue M1
(NCS S 5010-B10G)
 - **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 846 lm
- /2 _ 3000 K - 884 lm
- /3 _ 3500 K - 916 lm

E >90

Control
6220 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- _ _ / _ **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,20 Kg Net weight 0,78 Kg

LED IP20 CE ENEC ENEC Dimmer

6225

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **37/** _ _ Terra Red
(NCS S 4040-Y70R)
 - **42/** _ _ Blue M1
(NCS S 5010-B10G)
 - **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 1492 lm
- /2 _ 3000 K - 1569 lm
- /3 _ 3500 K - 1606 lm

F >90

Control
6225 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- _ _ / _ **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Light Source and electronics
1 x LED 16 W 850 mA

Packaging
1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2 Kg Net weight 1,5 Kg

LED IP20 CE ENEC ENEC Dimmer

Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website vibia.com

Cone



6240
Ø 60 cm



6245
Ø 80 cm

6240	Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R) ● 37/ _ _ Terra Red (NCS S 4040-Y70R) ● 42/ _ _ Blue M1 (NCS S 5010-B10G) ● 53/ _ _ Green M1 (NCS S 6005-G80Y)	LED Colour Temperature /1 _ 2700 K - 1492 lm /2 _ 3000 K - 1569 lm /3 _ 3500 K - 1606 lm F CRI >90	Control 6240 _ _ / _ _ _ _ / _ O On/Off _ _ / _ F Simultaneous line Push; 1-10V; Casambi; DALI _ _ / _ Z Casambi integrated on each individual luminaire (P2P)
	Materials Shade: Aluminum. Diffuser: Triplex opal glass. Light Source and electronics 1 x LED 16 W 850 mA	Packaging 0,727 x 0,727 x 0,32 m Vol 0,1691 m³ Gross weight 5 Kg Net weight 2,5 Kg LED IP20 CE UK RoHS Dimmer	
6245	Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R) ● 37/ _ _ Terra Red (NCS S 4040-Y70R) ● 42/ _ _ Blue M1 (NCS S 5010-B10G) ● 53/ _ _ Green M1 (NCS S 6005-G80Y)	LED Colour Temperature /1 _ 2700 K - 1492 lm /2 _ 3000 K - 1569 lm /3 _ 3500 K - 1606 lm F CRI >90	Control 6245 _ _ / _ _ _ _ / _ O On/Off _ _ / _ F Simultaneous line Push; 1-10V; Casambi; DALI _ _ / _ Z Casambi integrated on each individual luminaire (P2P)
	Materials Shade: Aluminum. Diffuser: Triplex opal glass. Light Source and electronics 1 x LED 16 W 850 mA	Packaging 1 Box 0,96 x 0,96 x 0,27 m Vol 0,2488 m³ Gross weight 7 Kg Net weight 3,5 Kg LED IP20 CE UK RoHS Dimmer	

Spotlight



Spot Accent Light
6200 Narrow
Ø 10 cm



Spot Accent Light
6205 Medium
6210 Wide
Ø 10 cm



Spot Flat Diffuser
6215
Ø 10 cm

6200 Narrow

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 846 lm
- /2** _ 3000 K - 884 lm
- /3** _ 3500 K - 916 lm



CRI >90

Control

6200 _ _ / _ _

- _ _ / **O** On/Off
- _ _ / **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- _ _ / **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 CE UK ENE Dimmer

6205 Medium

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 846 lm
- /2** _ 3000 K - 884 lm
- /3** _ 3500 K - 916 lm



CRI >90

Control

6205 _ _ / _ _

- _ _ / **O** On/Off
- _ _ / **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- _ _ / **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA

Packaging


1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 CE UK ENE Dimmer

Luminaire types

It is not possible to order luminaires alone,
you need to design your Plusminus on our
website vibia.com


6210 Wide	Finishes 11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 42/ _ _ Blue M1 (NCS S 5010-B10G) 53/ _ _ Green M1 (NCS S 6005-G80Y)	LED Colour Temperature /1 _ 2700 K - 846 lm /2 _ 3000 K - 884 lm /3 _ 3500 K - 916 lm CRI >90	Control 6210 _ _ / _ _ _ _ / _ 0 On/Off _ _ / _ F Simultaneous line Push; 1-10V; Casambi; DALI _ _ / _ Z Casambi integrated on each individual luminaire (P2P)
	Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Light Source and electronics 1 x LED 7,9 W 450 mA	Packaging 1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³ Gross weight 0,719 Kg Net weight 0,51 Kg LED IP20 CE UK RoHS REACH Dimmer	
6215 Flat Diffuser	Finishes 11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 42/ _ _ Blue M1 (NCS S 5010-B10G) 53/ _ _ Green M1 (NCS S 6005-G80Y)	LED Colour Temperature /1 _ 2700 K - 491 lm /2 _ 3000 K - 513 lm /3 _ 3500 K - 532 lm CRI >90	Control 6215 _ _ / _ _ _ _ / _ 0 On/Off _ _ / _ F Simultaneous line Push; 1-10V; Casambi; DALI _ _ / _ Z Casambi integrated on each individual luminaire (P2P)
	Materials Shade: Aluminum. Diffuser: PC- Polycarbonate. Light Source and electronics 1 x LED 4,2 W 250 mA	Packaging 1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³ Gross weight 0,719 Kg Net weight 0,51 Kg LED IP20 CE UK RoHS REACH Dimmer	

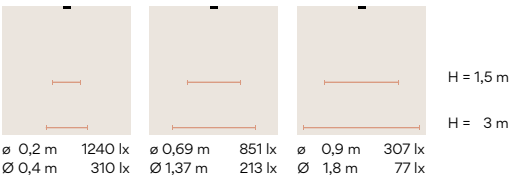

Spot Accent Light



Spot Flat Diffuser



Linear diffuser



6250



- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **37/** _ _ Terra Red
(NCS S 4040-Y70R)
 - **42/** _ _ Blue M1
(NCS S 5010-B10G)
 - **53/** _ _ Green M1
(NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 2544 lm
 - /2** _ 3000 K - 2628 lm
 - /3** _ 3500 K - 2712 lm
- CRI** >90

Control

6250 _ _ / _ _

- _ _ / **O** On/Off
- _ _ / **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- _ _ / **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,06 x 0,06 x 1,25 m
Vol 0,0057 m³
Gross weight 1,5 Kg Net weight 0,72 Kg

LED IP20 CE ENEC ENEC Dimmer

6255



- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **37/** _ _ Terra Red
(NCS S 4040-Y70R)
 - **42/** _ _ Blue M1
(NCS S 5010-B10G)
 - **53/** _ _ Green M1
(NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 5088 lm
 - /2** _ 3000 K - 5256 lm
 - /3** _ 3500 K - 5424 lm
- CRI** >90

Control

6255 _ _ / _ _

- _ _ / **O** On/Off
- _ _ / **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- _ _ / **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED STRIP 41,3 W 24 V

Packaging


1 Box 0,06 x 0,06 x 2,24 m
Vol 0,0103 m³
Gross weight 2 Kg Net weight 1,45 Kg

LED IP20 CE ENEC ENEC Dimmer

Linear Low UGR - High-Comfort



6260



- Finishes
- 11/ _ _ Black (NCS S 8500-N)
 - 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)
 - 42/ _ _ Blue M1 (NCS S 5010-B10G)
 - 53/ _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature
- /1 _ 2700 K - 1281 lm
 - /2 _ 3000 K - 1323 lm
 - /3 _ 3500 K - 1366 lm
- CRI >90

- Control
- 6260 _ _ / _ _
- _ _ / _ 0 On/Off
 - _ _ / _ F Simultaneous line Push; 1-10V; Casambi; DALI
 - _ _ / _ Z Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m³
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19

LED IP20 CE UK ENEC Dimmer

6265



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 2562 lm
- /2 _ 3000 K - 2647 lm
- /3 _ 3500 K - 2731 lm

D >90

Control

6265 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- _ _ / _ **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19

LED IP20 CE UK ENE Dimmer

6270



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 5124 lm
- /2 _ 3000 K - 5293 lm
- /3 _ 3500 K - 5462 lm

D >90

Control

6270 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- _ _ / _ **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 41,3 W 24 V

Packaging

1 Box 0,08 x 0,11 x 1,10 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19

LED IP20 CE UK ENE Dimmer


Linear Low UGR - High-Efficiency




6275
26,8 x 7 x 3 cm




6280
52,5 x 7 x 3 cm

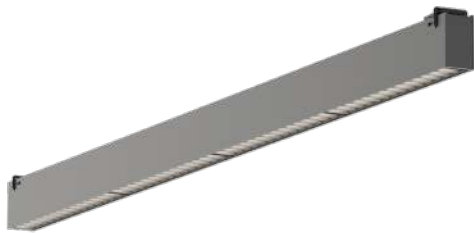

6285
103,7 x 7 x 3 cm



6275



- Finishes
- 11/ _ _ Black (NCS S 8500-N)
 - 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)
 - 42/ _ _ Blue M1 (NCS S 5010-B10G)
 - 53/ _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature
- /1 _ 2700 K - 1281 lm
 - /2 _ 3000 K - 1323 lm
 - /3 _ 3500 K - 1366 lm
- CRI >90

- Control
- 6275 _ _ / _ _
- _ _ / _ 0 On/Off
 - _ _ / _ F Simultaneous line Push; 1-10V; Casambi; DALI
 - _ _ / _ Z Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 10,3 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,32 m

Vol 0,0028 m³

Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19



6280



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 2562 lm
- /2** _ 3000 K - 2647 lm
- /3** _ 3500 K - 2731 lm



CRI >90

Control

6280 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- _ _ / _ **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,57 m
 Vol 0,0050 m³
 Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19

LED IP20 CE UKCA ENEC Dimmer

6285



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 5124 lm
- /2** _ 3000 K - 5293 lm
- /3** _ 3500 K - 5462 lm



CRI >90

Control

6285 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- _ _ / _ **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 41,3 W 24V

Packaging

1 Box 0,08 x 0,11 x 1,102 m
 Vol 0,0096 m³
 Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19

LED IP20 CE UKCA ENEC Dimmer

Accessories Toolbox


Thought out to the smallest detail.
Receive your personalised accessories
toolbox for a quick and easy installation.

Installation accessories

You will receive a personalised accessories toolbox per every composition made at **vibia.com**. The Toolbox includes some extra units for on-site adjustments.




Belt terminations options




B3

Belt End Cap



B4


Double End Cap



B5


Pendant End Cap

Fasten accessories options




F1

Circular Ratchet




F2

Circular Anchor




F3

Belt Support




F4

Counterweight



F5

Corner Support



F6

Freestyle Bar
2 m. bar length
5 m. maximum tensor cable

Tension clips options



T1

Suspension Clip



T2

V-Tension Clip



T3

Parallel Tension Clip S



T4

Parallel Tension Clip M



T5

Cable End Cap



T6

Pendant Cable S



T7

Pendant Cable M

Materials

Counterweight: Cast iron

Finishes

11 Black (NCS S 0300-N)

Electrical connection options


Choose your preferred installation
option according to your needs.

Dimming control options

Choose your preferred installation
option according to your needs.

Belt Options Surface Canopy

Choose your preferred installation
option according to your needs.



Surface Canopy S
E1 Ø 205 mm.

Wattage options:
< 60W.


Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push;
Casambi; Casambi (P2P).

Body: ABS.
Net weight 0,9 Kg.

11 Black
(NCS S 8500-N)

IP20 CE UK ENEC Dimmer Bi-volt



Surface Canopy M
E2 Ø 260 mm.

Wattage options:
>60W.
<240W.


Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push;
Casambi; Casambi (P2P).

Body: ABS.
Net weight 1,8 Kg.

11 Black
(NCS S 8500-N)

IP20 CE UK ENEC Dimmer Bi-volt



Built-in Canopy
E3 Ø 120 mm.

Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push;
Casambi; Casambi (P2P).

Body: ABS.
Net weight 1,08 - 1,860 Kg.

11 Black
(NCS S 8500-N)

25/40/60W
IP20 CE UK ENEC Dimmer Bi-volt

120/240W
IP20 CE UK ENEC Dimmer Bi-volt



Remote Built-in Canopy
E4 Ø 60 mm.

Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push;
Casambi; Casambi (P2P).

Body: ABS.
Net weight 0,87 - 1,65 Kg.

11 Black
(NCS S 8500-N)

25/40/60W
IP20 CE UK ENEC Dimmer Bi-volt

120/240W
IP20 CE UK ENEC Dimmer Bi-volt



Remote Surface Canopy
E5 Ø 60 mm.

Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push;
Casambi; Casambi (P2P).

Body: Aluminum.
Net weight 0,95 - 1,73 Kg.

11 Black
(NCS S 8500-N)

25/40/60W
IP20 CE UK ENEC Dimmer Bi-volt

120/240W
IP20 CE UK ENEC Dimmer Bi-volt



Plug-in Floor Switch
E6 Ø 90 mm.

Wattage options:
< 60W.


Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi;
Casambi (P2P).

Body: ABS.

11 Black
(NCS S 8500-N)

25/40/60W
IP20 CE UK ENEC Dimmer Bi-volt



Wire Connector
E8 Ø 3,1 mm.

Wattage options:
< 60W.

Wire connector
E8 Ø 5,8 mm.

Wattage options:
< 60W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 50/60Hz.

Body: ABS.



11 Black
(NCS S 8500-N)

IP20 CE UK ENEC

Belt

Maximum 60 metres per electrical connection, belt length personalised for each composition on www.vibia.com


Finishes	Belt	Fire Hazard Testing. GW-960.
Black Terra Red Blue Green Beige	Polyester	fulfills the requirements of: standards EN 60695-2-10:2013; EN 60695-2-11:2015; EN 60695-2-12:2011 / A1:2014

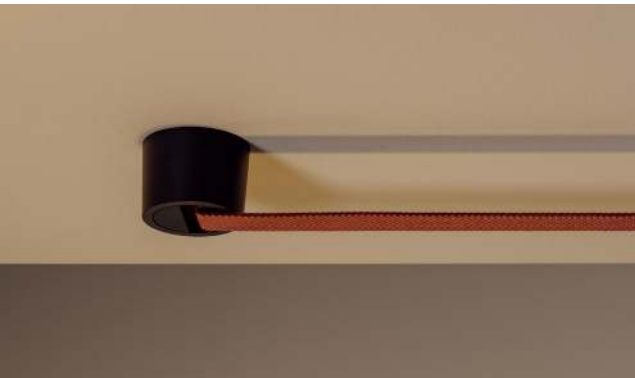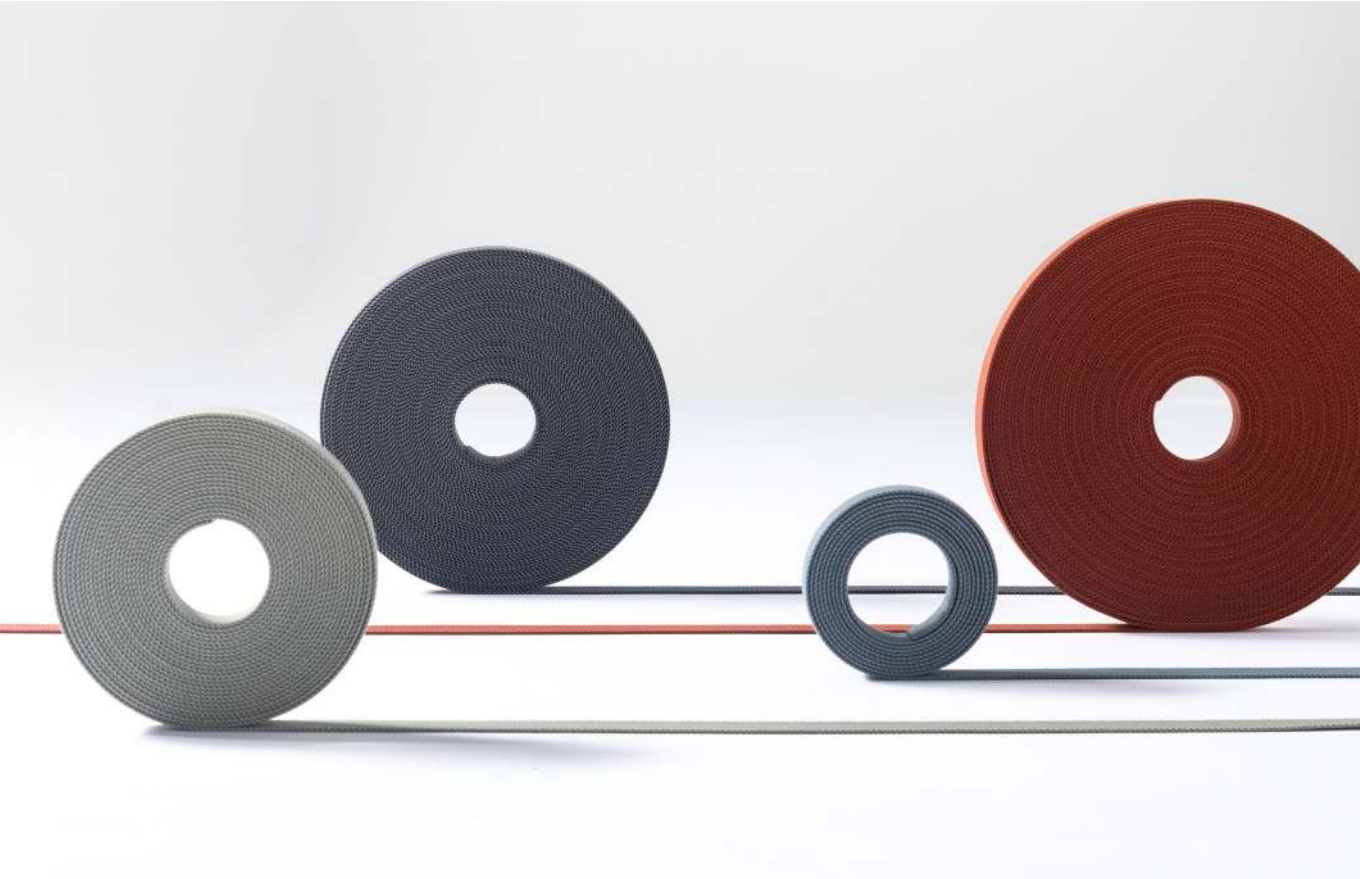

The distance of the belt from the wall or the ceiling, when installed in parallel, is always 4,5 cm.

Belt terminations


Belt terminations can be adjusted during the installation process according to your preference.

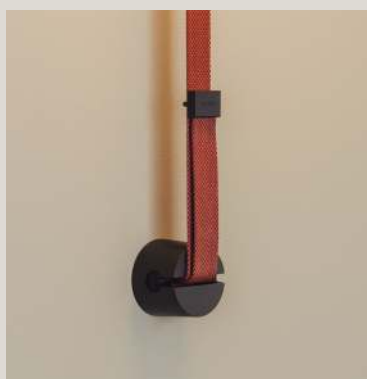


Composition examples for orientative prices

The final price of the composition depends on the number of luminaires, belt length, dimming control and the electrical connection type chosen.


Composition examples for orientative prices




Sketch composed by one composition.
2 luminaires: Cone 6240, Spotlight 6215.




Sketch composed by one composition.
2 luminaires: Sphere 6230, Sphere 6235.



Sketch composed by two identical compositions.
2 luminaires: Linear Diffuser 6250, Linear Diffuser 6255.




Sketch composed by one composition.
3 luminaires: Spotlight 6205 x 2, Sphere 6230.




Sketch composed by one composition.

1 luminaire: Sphere 6230.




Sketch composed by several compositions.

3 luminaires: Linear Diffuser 6255.



Sketch composed by one composition.


1 luminaire: Sphere 6230.



Sketch composed by two compositions.


2 luminaires: Linear Diffuser 6250.

Composition examples for orientative prices




Sketch composed by one composition.

3 luminaires: Linear Diffuser 6250, Linear Diffuser 6255 x 2.




Sketch composed by three identical compositions.

2 luminaires: Cone 6245 x 2.




Sketch composed by one composition.

1 luminaire: Semisphere 6225.




Sketch composed by one composition.

3 luminaires: Sphere 6230 x 3.




Sketch composed by three identical compositions.

2 luminaires: Sphere 6235 x 2.




Sketch composed by one composition.

1 luminaire: Sphere 6235.



Sketch composed by one composition.


1 luminaire: Cone 6245.



Sketch composed by one composition.


2 luminaires: Cone 6240 x 2.

Composition examples for orientative prices




Sketch composed by one composition.

2 luminaires: Linear Low UGR High-Comfort 6270 x 2.




Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.




Sketch composed by one composition.

4 luminaires: Semisphere 6220 x 4.




Sketch composed by one composition.

3 luminaires: Sphere 6230 x 3.



Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.



Sketch composed by one composition.

3 luminaires: Hemisphere 6220 x 3.

Each project is unique.
Visit vibia.com and chose among
multiple compositions designed
and adapted to your project needs.

Personalise your own Plusminus composition
quick and easy at vibia.com

Plusminus Solo

Design by Diez Office

Plusminus Solo introduces a collection of versatile semi-spherical luminaires that adapt to the surrounding space. Easily adjustable, the Plusminus wall range features semi-spherical directed flat diffusers in different sizes, as well as an accent spotlight for more precise illumination.

Ceiling Wall

Spot Accent Light

6330 Narrow
6331 Medium
6332 Wide



Spot Flat Diffuser

6333



Spot Flat Diffuser

6335



Spot Flat Diffuser

6340



6330

Narrow

6331

Medium

6332

Wide

6330 Narrow

Finishes

- 11/ _ _ Black (NCS S 8500-N)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 42/ _ _ Blue M1 (NCS S 5010-B10G)
- 53/ _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

- /1_ 2700 K - 916 lm
- /2_ 3000 K - 925 lm
- /3_ 3500 K - 959 lm



CRI >90

Control

6330 _ _ / _ _

- _ _ / _ 0 On/ Off (Remote)
- _ _ / _ 1 DALI-2 (Remote)
- _ _ / _ B Push; 1-10V (Remote)
- _ _ / _ Z Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K:
1 x LED 7,9 W 450 mA
3000 K - 3500K:
1 x LED 7,7 W 450 mA
Constant Current 450 mA
220-240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,67 Kg Net weight 0,49 Kg

Notes

6330 _ _ / _ 1: DALI-2 **Bi-volt**
6330 _ _ / _ B: Push; 1-10V **Bi-volt**

LED **IP20** **Dimmer**

Ø 3 cm

6331 Medium




Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 42/ _ _ Blue M1 (NCS S 5010-B10G) 53/ _ _ Green M1 (NCS S 6005-G80Y)	/1 _ 2700 K - 916 lm /2 _ 3000 K - 925 lm /3 _ 3500 K - 959 lm E CRI >90	6331 _ _ / _ _ _ / 0 On/ Off (Remote) _ _ / 1 DALI-2 (Remote) _ _ / B Push; 1-10V (Remote) _ _ / Z Casambi (Remote)


Materials	Packaging
Body: Aluminum. Diffuser: PC- Polycarbonate.	1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³ Gross weight 0,67 Kg Net weight 0,49 Kg
Light Source and electronics	Notes
2700 K: 1 x LED 7,9 W 450 mA 3000 K - 3500K: 1 x LED 7,7 W 450 mA Constant Current 450 mA 220~240Vac 50/60Hz	6331 _ _ / _ 1: DALI-2 Bi-volt 6331 _ _ / _ B: Push; 1-10V Bi-volt LED IP20 CE UK ENEC Dimmer Ø 3 cm

6332 Wide

Finishes	LED Colour Temperature	Control
11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 42/ _ _ Blue M1 (NCS S 5010-B10G) 53/ _ _ Green M1 (NCS S 6005-G80Y)	/1 _ 2700 K - 916 lm /2 _ 3000 K - 925 lm /3 _ 3500 K - 959 lm E CRI >90	6332 _ _ / _ _ _ / 0 On/ Off (Remote) _ _ / 1 DALI-2 (Remote) _ _ / B Push; 1-10V (Remote) _ _ / Z Casambi (Remote)

Materials	Packaging
Body: Aluminum. Diffuser: PC- Polycarbonate.	1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³ Gross weight 0,67 Kg Net weight 0,49 Kg
Light Source and electronics	Notes
2700 K: 1 x LED 7,9 W 450 mA 3000 K - 3500K: 1 x LED 7,7 W 450 mA Constant Current 450 mA 220~240Vac 50/60Hz	6332 _ _ / _ 1: DALI-2 Bi-volt 6332 _ _ / _ B: Push; 1-10V Bi-volt LED IP20 CE UK ENEC Dimmer Ø 3 cm

			H = 1,5 m H = 3 m
ø 0,2 m 1240 lx Ø 0,4 m 310 lx	ø 0,69 m 851 lx Ø 1,37 m 213 lx	ø 0,9 m 307 lx Ø 1,8 m 77 lx	



6333 Flat Diffuser	Finishes 11/ __ Black (NCS S 8500-N) 24/ __ Beige M1 (NCS S 2005-Y50R) 37/ __ Terra Red (NCS S 4040-Y70R) 42/ __ Blue M1 (NCS S 5010-B10G) 53/ __ Green M1 (NCS S 6005-G80Y)	LED Colour Temperature /1 _ 2700 K - 491 lm /2 _ 3000 K - 546 lm /3 _ 3500 K - 566 lm CRI >90	Control 6333 __ / __ __ / __ 0 On/ Off (Remote) __ / __ 1 DALI-2 (Remote) __ / __ B Push; 1-10V (Remote) __ / __ Z Casambi (Remote)
	Materials Body: Aluminum. Diffuser: PC- Polycarbonate. Light Source and electronics 2700 K: 1 x LED 4,2 W 250 mA 3000 K - 3500K: 1 x LED 4,1 W 250 mA Constant Current 250 mA 220~240Vac 50/60Hz		Packaging 1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³ Gross weight 0,67 Kg Net weight 0,49 Kg Notes 6333 __ / __ 1: DALI-2 6333 __ / __ B: Push; 1-10V

Table Floor



6341 Accent medium / Surface

6343 Flat diffuser / Surface

Ø 10 x 50 cm

6346 Accent medium / Bolt-down

6348 Flat diffuser / Bolt-down

Ø 10 x 50 cm

6341

Accent medium / Surface

6343

Flat diffuser / Surface

6341 Accent medium / Surface

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 941 lm
- /2** _ 3000 K - 987 lm
- /3** _ 3500 K - 1022 lm

E >

CRI >90

Control

6341 _ _ / _ _

_ _ / _ **5** Push

_ _ / _ **Z** Casambi

Materials

Body: Aluminum.
Base: Steel / Zinc Alloy.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

Notes

6341 _ _ / _ 5: Push **Multi-volt**

Cable with plug included.

LED **IP20** **CE** **UK** **ERC** **Dimmer**

6343 Flat diffuser / Surface

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 531 lm
- /2** _ 3000 K - 557 lm
- /3** _ 3500 K - 557 lm

E >

CRI >90

Control

6343 _ _ / _ _

_ _ / _ **5** Push

_ _ / _ **Z** Casambi

Materials

Body: Aluminum.
Base: Steel.
Spot: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

Notes

6343 _ _ / _ 5: Push **Multi-volt**

LED **IP20** **CE** **UK** **ERC** **Dimmer**

6346 Accent medium / Bolt-down	6346 Accent medium / Bolt-down		
6348 Flat diffuser / Bolt-down	Finishes ● 11/ __ Black (NCS S 8500-N) ● 24/ __ Beige M1 (NCS S 2005-Y50R) ● 37/ __ Terra Red (NCS S 4040-Y70R) ● 42/ __ Blue M1 (NCS S 5010-B10G) ● 53/ __ Green M1 (NCS S 6005-G80Y)	LED Colour Temperature /1 _ 2700 K - 941 lm /2 _ 3000 K - 987 lm /3 _ 3500 K - 1022 lm E  CRI >90	Control 6346 __ / __ __ / _ 1 DALI-2 __ / _ Z 40 Casambi
	Materials Body: Aluminum, Spot: Aluminum. Diffuser: PC- Polycarbonate.	Packaging 1 Box 0,78 x 0,13 x 0,13 m Vol 0,0326 m³ Gross weight 3,8 Kg Net weight 2,8 Kg	
	Light Source and electronics 1 x LED 7,9 W 450 mA Constant Current 450 mA 220~240Vac 50/60Hz	Notes 6346 __ / _ 1: DALI-2        	
	6348 Flat diffuser / Bolt-down		
	Finishes ● 11/ __ Black (NCS S 8500-N) ● 24/ __ Beige M1 (NCS S 2005-Y50R) ● 37/ __ Terra Red (NCS S 4040-Y70R) ● 42/ __ Blue M1 (NCS S 5010-B10G) ● 53/ __ Green M1 (NCS S 6005-G80Y)	LED Colour Temperature /1 _ 2700 K - 531 lm /2 _ 3000 K - 557 lm /3 _ 3500 K - 557 lm E  CRI >90	Control 6348 __ / __ __ / _ 1 DALI-2 __ / _ Z 40 Casambi
	Materials Body: Aluminum, Spot: Aluminum. Diffuser: PC- Polycarbonate.	Packaging 1 Box 0,78 x 0,13 x 0,13 m Vol 0,0326 m³ Gross weight 3,8 Kg Net weight 2,8 Kg	
	Light Source and electronics 1 x LED 4,2 W 250 mA Constant Current 250 mA 220~240Vac 50/60Hz	Notes 6348 __ / _ 1: DALI-2        	



Wall Table Floor




Accent medium
6361 Surface / Bolt-down

Flat diffuser
6363 Surface / Bolt-down

Flat diffuser
6365 Surface / Bolt-down

Flat diffuser
6370 Surface / Bolt-down

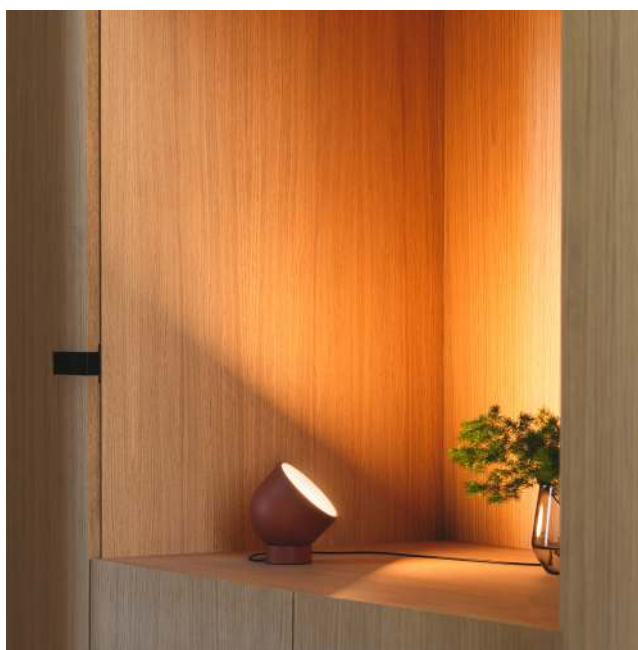

6361 Accent medium Surface / Bolt down	6361 Accent medium Surface / Bolt-down		
6363 Flat diffuser Surface / Bolt-down			
	Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R) ● 37/ _ _ Terra Red (NCS S 4040-Y70R) ● 42/ _ _ Blue M1 (NCS S 5010-B10G) ● 53/ _ _ Green M1 (NCS S 6005-G80Y) LED Colour Temperature /1 _ 2700 K - 941 lm /2 _ 3000 K - 987 lm /3 _ 3500 K - 1022 lm E CRI >90	Control 6361 _ _ / _ _ _ _ / _ 5 Push _ _ / _ Z Casambi (Remote)	
	Materials Body: Aluminum. Diffuser: PC- Polycarbonate. Light Source and electronics 1 x LED 4,2 W 250 mA Constant Current 250 mA 220~240Vac 50/60Hz	Packaging 1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³ Gross weight 0,95 Kg Net weight 0,73 Kg Notes 6361 _ _ / _ 5: Push Multi-volt Cable with plug included. Electric cable 2 m. Base: Ø 6 cm. Height 2,3 cm. LED IP20 CE UK EAC Dimmer	
	6363 Flat diffuser Surface / Bolt-down		
	Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R) ● 37/ _ _ Terra Red (NCS S 4040-Y70R) ● 42/ _ _ Blue M1 (NCS S 5010-B10G) ● 53/ _ _ Green M1 (NCS S 6005-G80Y) LED Colour Temperature /1 _ 2700 K - 531 lm /2 _ 3000 K - 557 lm /3 _ 3500 K - 557 lm E CRI >90	Control 6363 _ _ / _ _ _ _ / _ 5 Push _ _ / _ Z Casambi (Remote)	
	Materials Body: Aluminum. Base: Zinc Alloy. Diffuser: PC- Polycarbonate. Light Source and electronics 1 x LED 4,2 W 250 mA Constant Current 250 mA 220~240Vac 50/60Hz	Packaging 1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³ Gross weight 0,98 Kg Net weight 0,73 Kg Notes 6363 _ _ / _ 5: Push Multi-volt Cable with plug included. Electric cable 2 m. Base: Ø 6 cm. Height 2,3 cm. LED IP20 CE UK EAC Dimmer	
6365 Flat diffuser Surface / Bolt-down	6365 Flat diffuser Surface / Bolt-down		
	Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R) ● 37/ _ _ Terra Red (NCS S 4040-Y70R) ● 42/ _ _ Blue M1 (NCS S 5010-B10G) ● 53/ _ _ Green M1 (NCS S 6005-G80Y) LED Colour Temperature /1 _ 2700 K - 941 lm /2 _ 3000 K - 987 lm /3 _ 3500 K - 1022 lm E CRI >90	Control 6365 _ _ / _ _ _ _ / _ 5 Push _ _ / _ Z Casambi	
	Materials Body: Aluminum. Base: Zinc Alloy. Diffuser: PC- Polycarbonate. Light Source and electronics 1 x LED 7,9 W 450 mA Constant Current 450 mA 220~240Vac 50/60Hz	Packaging 1 Box 0,26 x 0,26 x 0,26 m Vol 0,0175 m³ Gross weight 1,31 Kg Net weight 0,89 Kg Notes 6365 _ _ / _ 5: Push Multi-volt Cable with plug included. Electric cable 2 m. Base: Ø 8,2 cm. Height 2,3 cm. LED IP20 CE UK EAC Dimmer	

6370

Flat diffuser Surface /
Bolt-down

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 1673 lm
- /2 _ 3000 K - 1752 lm
- /3 _ 3500 K - 1817 lm

LED

CRI >90

Control

6370 _ _ / _ _

_ _ / _ **5** Push

_ _ / _ **Z** Casambi

Materials

Body: Aluminum.
Base: Zinc Alloy.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 16 W 850 mA
Constant Current 850 mA
220-240Vac 50/60Hz


Packaging

1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2,20 Kg Net weight 1,70 Kg

Notes

6370 _ _ / _ 5: Push **Multi-volt**
Cable with plug included. Electric cable 2 m.
Base: Ø 11 cm. Height 2,8 cm.

LED IP20 CE UK ENEC Dimmer



Kontorno

Design by Sebastian Herkner

Consisting of an elegant linear framework complemented by a cylindrical diffuser or curved reflector, the Kontorno collection envelops the light source it contains, offering diffuse, balanced illumination.

Wall



6414
20 x 92 cm



6416
20 x 122 cm



6418
20 x 162 cm



6444
19 x 92 cm



6446
19 x 122 cm

6414

Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2381 lm
E ☐
/2 _ 3000 K - 2381 lm
F ☐
/3 _ 3500 K - 2551 lm
E ☐
/7 _ 2200 K - 2041 lm
F ☐
CRI >90

Control

6414 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Concave shade: Aluminum. Diffuser: PC- Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 5,5 Kg Net weight 3,5 Kg

Notes

6414 _ _ / _ **1**: DALI-2 ☐ Multi-volt
6414 _ _ / _ **3**: 1-10V ☐ Multi-volt
6414 _ _ / _ **5**: Push ☐ Multi-volt

LED ☐ IP20 ☐ CE ☐ UK ☐ ENEC ☐ Dimmer

6416

Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3154 lm
E ☐
/2 _ 3000 K - 3154 lm
F ☐
/3 _ 3500 K - 3380 lm
E ☐
/7 _ 2200 K - 2703 lm
F ☐
CRI >90

Control

6416 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Concave shade: Aluminum. Diffuser: PC- Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 5,8 Kg Net weight 3,8 Kg

Notes

6416 _ _ / _ **1**: DALI-2 ☐ Multi-volt
6416 _ _ / _ **3**: 1-10V ☐ Multi-volt
6416 _ _ / _ **5**: Push ☐ Multi-volt

LED ☐ IP20 ☐ CE ☐ UK ☐ ENEC ☐ Dimmer

6418

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4205 lm
E
/2 _ 3000 K - 4205 lm
F
/3 _ 3500 K - 4506 lm
E
/7 _ 2200 K - 3604 lm
F
CRI >90

Control

6418 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 5 Push
_ _ / _ Z Casambi

Materials

Concave shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 37,2 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 0,175 m
Vol 0,1580 m³
Gross weight 6,5 Kg Net weight 4 Kg

Notes

6418 _ _ / _ 1: DALI-2 Multi-volt
6418 _ _ / _ 3: 1-10V Multi-volt
6418 _ _ / _ 5: Push Multi-volt

LED IP20 CE UK ENE Dimmer

6444

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2381 lm
E
/2 _ 3000 K - 2381 lm
F
/3 _ 3500 K - 2551 lm
E
/7 _ 2200 K - 2041 lm
F
CRI >90

Control

6444 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 5 Push
_ _ / _ Z Casambi

Materials

Glass shade: Opal triplex.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 6,2 Kg Net weight 3,7 Kg

Notes

6444 _ _ / _ 1: DALI-2 Multi-volt
6444 _ _ / _ 3: 1-10V Multi-volt
6444 _ _ / _ 5: Push Multi-volt

LED IP20 CE UK ENE Dimmer

6446

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3154 lm
E
/2 _ 3000 K - 3154 lm
F
/3 _ 3500 K - 3380 lm
E
/7 _ 2200 K - 2703 lm
F
CRI >90

Control

6446 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 5 Push
_ _ / _ Z Casambi

Materials

Glass shade: Opal triplex.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging


1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 9 Kg Net weight 6 Kg

Notes

6446 _ _ / _ 1: DALI-2 Multi-volt
6446 _ _ / _ 3: 1-10V Multi-volt
6446 _ _ / _ 5: Push Multi-volt

LED IP20 CE UK ENE Dimmer

Pendant



6434

92 x max. 200 cm




6436

122 x max. 200 cm



6438

162 x max. 200 cm



6474

92 x max. 200 cm



6476

122 x max. 200 cm

6434

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2381 lm
E
/2 _ 3000 K - 2381 lm
F
/3 _ 3500 K - 2551 lm
E
/7 _ 2200 K - 2041 lm
F
CRI >90

Control
6434 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 5 Push
_ _ / _ Z Casambi

Materials
Concave shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 5,5 Kg Net weight 3,5 Kg

Notes
6434 _ _ / _ 1: DALI-2 Multi-volt
6434 _ _ / _ 3: 1-10V Multi-volt
6434 _ _ / _ 5: Push Multi-volt
Extra cable length.

LED IP20 CE UK ENE Dimmer

6436

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 3154 lm
 E
 /2 _ 3000 K - 3154 lm
 F
 /3 _ 3500 K - 3380 lm
 E
 /7 _ 2200 K - 2703 lm
 F
 CRI >90

Control

6436 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ 5 Push
 _ _ / _ Z Casambi

Materials

Concave shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 27,9 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,35 m
 Vol 0,122 m³
 Gross weight 5,8 Kg Net weight 3,8 Kg

Notes

6436 _ _ / _ 1: DALI-2 Multi-volt
 6436 _ _ / _ 3: 1-10V Multi-volt
 6436 _ _ / _ 5: Push Multi-volt
 Extra cable length.

LED IP20 CE UK ENE Dimmer

6438

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 4205 lm
 E
 /2 _ 3000 K - 4205 lm
 F
 /3 _ 3500 K - 4505 lm
 E
 /7 _ 2200 K - 3604 lm
 F
 CRI >90

Control

6438 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ 5 Push
 _ _ / _ Z Casambi

Materials

Concave shade: Aluminum.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 37,2 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,75 m
 Vol 0,158 m³
 Gross weight 6,5 Kg Net weight 4 Kg

Notes

6438 _ _ / _ 1: DALI-2 Multi-volt
 6438 _ _ / _ 3: 1-10V Multi-volt
 6438 _ _ / _ 5: Push Multi-volt
 Extra cable length.

LED IP20 CE UK ENE Dimmer

6474

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 2381 lm
 E
 /2 _ 3000 K - 2381 lm
 /7 _ 2200 K - 2041 lm
 F
 CRI >90

Control

6474 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ 5 Push
 _ _ / _ Z Casambi

Materials

Glass shade: Opal triplex.
 Diffuser: PC- Polycarbonate.
 Structures: Steel.
 Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 20,8 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,05 m
 Vol 0,095 m³
 Gross weight 6,2 Kg Net weight 3,7 Kg

Notes

6474 _ _ / _ 1: DALI-2 Multi-volt
 6474 _ _ / _ 3: 1-10V Multi-volt
 6474 _ _ / _ 5: Push Multi-volt
 Extra cable length.

LED IP20 CE UK ENE Dimmer

6476	Finishes	LED Colour Temperature	Control
	● 11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K - 3154 lm E	6476 _ _ / _ _
		/2 _ 3000 K - 3154 lm	_ _ / _ 1 DALI-2
		/7 _ 2200 K - 2703 lm	_ _ / _ 3 1-10V
		F	_ _ / _ 5 Push
		CRI >90	_ _ / _ Z Casambi
Materials		Packaging	
Glass shade: Opal triplex. Diffuser: PC- Polycarbonate. Structures: Steel. Canopy: Aluminum.		1 Box 0,75 x 0,45 x 1,35 m Vol 0,122 m³ Gross weight 9 Kg Net weight 6 Kg	
Light Source and electronics		Notes	
1 x LED STRIP 27,9 W 750 mA Constant Current 750 mA 90~305V 50/60Hz		6476 _ _ / _ 1: DALI-2 Multi-volt	
		6476 _ _ / _ 3: 1-10V Multi-volt	
		6476 _ _ / _ 5: Push Multi-volt	
		Extra cable length.	
		LED IP20 CE UK ENE Dimmer	





Bind

Design by Martín Azúa

Bind is a hybrid lighting system designed to create multiple atmospheres to suit a range of spaces, uses and moods. The connective quality, ease of installation and versatility of this fully modular system guarantees a harmonious balance between technical and decorative lighting, promising new holistic lighting solutions.

Pendant Ceiling - Accent Downlight

6500 Narrow
6504 Medium
Ø 3 x 15 cm



6520 Narrow
6524 Medium
6528 Wide
Ø 4 x 17,5 cm



6525 Medium
6529 Wide



Pendant Ceiling - Accent Spotlight

6510 Narrow
6514 Medium
Ø 3 x 20 cm



6530 Narrow
6534 Medium
6538 Wide
Ø 4 x 22,5 cm



Pendant Ceiling - Wide Accent Downlight

6540 Medium
6542 Wide



6500
Narrow
6504
Medium

6500 Narrow

Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K - 451 lm	6500 _ _ / _ _
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 471 lm	_ _ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
	/3 _ 3500 K - 489 lm	_ _ / _ Z Casambi (P2P)
	F >90	

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

1 x LED 4,3 W 250 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,6 Kg Net weight 0,12 Kg

LED IP20 CE UK ENEC

6504 Medium

Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K - 451 lm	6504 _ _ / _ _
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 471 lm	_ _ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
	/3 _ 3500 K - 489 lm	_ _ / _ Z Casambi (P2P)
	F >90	

Materials

Lens: PMMA.
Body: Aluminum.


Light Source and electronics

1 x LED 4,3 W 250 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,6 Kg Net weight 0,12 Kg

LED IP20 CE UK ENEC

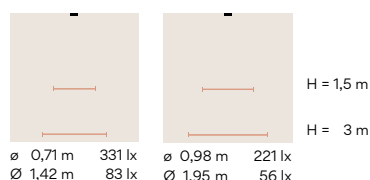

Wide

__/_Z Casambi (P2P)


LED IP20 UK EAC

__ / _Z Casambi (P2P)

LED IP20 EAC

___ / ___ Z Casambi (P2P)

LED IP20



6525
Medium
6529
Wide

6525 Medium

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm



CRI >90

Control

6525 _ _ / _ _
_ _ / **8Z** Casambi (P2P)


Materials

Lens: Polycarbonate.
Body: Aluminum.

Light Source and electronics
1 x LED 5,5 W 150 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,8 Kg Net weight 0,2 Kg



6529 Wide

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm



CRI >90

Control

6529 _ _ / _ _
_ _ / **8Z** Casambi (P2P)


Materials

Lens: Polycarbonate.
Body: Aluminum.

Light Source and electronics
1 x LED 5,5 W 150 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,8 Kg Net weight 0,2 Kg



6510

Narrow

6514

Medium

6510 Narrow

Finishes

11/ _ _ Black

(NCS S 8500-N)

24/ _ _ Beige M1

(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm

/2 _ 3000 K - 471 lm

/3 _ 3500 K - 489 lm

F

CRI >90

Control

6510 _ _ / _ _

_ _ / _ F On/Off; Push; 1-10V; DALI-2;

Casambi Simultaneous Line

_ _ / _ Z Casambi (P2P)

Materials

Lens: PMMA.

Body: Aluminum.

Light Source and electronics

1 x LED 4,3 W 250 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m

Vol 0,0026 m³

Gross weight 0,68 Kg Net weight 0,18 Kg

LED

IP20

CE

UK

RoHS

6514 Medium

Finishes

11/ _ _ Black

(NCS S 8500-N)

24/ _ _ Beige M1

(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm

/2 _ 3000 K - 471 lm

/3 _ 3500 K - 489 lm

F

CRI >90

Control

6514 _ _ / _ _

_ _ / _ F On/Off; Push; 1-10V; DALI-2;

Casambi Simultaneous Line

_ _ / _ Z Casambi (P2P)

Materials

Lens: PMMA..

Body: Aluminum.

Light Source and electronics

1 x LED 4,3 W 250 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m

Vol 0,0026 m³

Gross weight 0,68 Kg Net weight 0,18 Kg

LED

IP20

CE

UK

RoHS

ø 0,71 m 331 lx

ø 1,42 m 83 lx


ø 0,98 m 221 lx

ø 1,95 m 56 lx

H = 1,5 m

H = 3 m

6530
Narrow
6534
Medium
6538
Wide



6530 Narrow

Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K - 530 lm	6530 _ _ / _ _
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 554 lm	__ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
	/3 _ 3500 K - 574 lm	__ / _ Z Casambi (P2P)
	F >90	

Materials

Lens: PMMA
Body: Aluminum.

Light Source and electronics

1 x LED 5,2 W 300 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,87 Kg Net weight 0,27 Kg

LED IP20 CE ENEC

6534 Medium

Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	Static White	6534 _ _ / _ _
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/1 _ 2700 K - 530 lm	__ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
	/2 _ 3000 K - 554 lm	__ / _ Z Casambi (P2P)
	/3 _ 3500 K - 574 lm	
	Tunable White	__ / 8Z Tunable White + Casambi (P2P)
	/8 _ (1800 K - 4000 K) 308 lm - 504 lm	
	F >90	

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 5,2 W 300 mA

Tunable White:

1 x LED 5,6 W 150 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,87 Kg Net weight 0,27 Kg

LED IP20 CE ENEC

6538 Wide

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 530 lm
 - /2 _ 3000 K - 554 lm
 - /3 _ 3500 K - 574 lm

- Tunable White**
- /8 _ (1800 K - 4000 K)
308 lm - 504 lm



CRI >90

Control

6538 _ _ / _ _

- _ _ / _ **F** On/Off; Push; 1-10V; DALI-2;
Casambi Simultaneous Line
- _ _ / _ **Z** Casambi (P2P)

- _ _ / **8Z** Tunable White +
Casambi (P2P)

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 5,2 W 300 mA

Tunable White:


1 x LED 5,6 W 150 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m

Vol 0,0026 m³

Gross weight 0,87 Kg Net weight 0,27 Kg

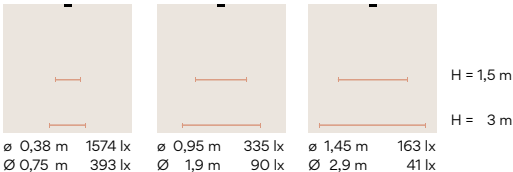

6540
Medium
6542
Wide

6540 Medium

Finishes	LED Colour Temperature	Control
11/  __ Black (NCS S 8500-N) 24/  __ Beige M1 (NCS S 2005-Y50R)	Static White /1 _ 2700 K - 1256 lm /2 _ 3000 K - 1313 lm /3 _ 3500 K - 1360 lm Tunable White /8 _ (1800 K - 4000 K) 571 lm - 895 lm  CRI >90	6540 _ _ / _ _ _ _ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line _ _ / _ Z Casambi (P2P) _ _ / 8Z Tunable White + Casambi (P2P)

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA

Tunable White:
1 x LED 8,9 W 500 mA
(max. combined)

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m³
Gross weight 1,5 Kg Net weight 1 Kg

6542 Wide

Finishes	LED Colour Temperature	Control
11/  __ Black (NCS S 8500-N) 24/  __ Beige M1 (NCS S 2005-Y50R)	Static White /1 _ 2700 K - 1256 lm /2 _ 3000 K - 1313 lm /3 _ 3500 K - 1360 lm Tunable White /8 _ (1800 K - 4000 K) 571 lm - 895 lm  CRI >90	6542 _ _ / _ _ _ _ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line _ _ / _ Z Casambi (P2P) _ _ / 8Z Tunable White + Casambi (P2P)

Materials

Diffuser: PC- Polycarbonate.
Lens: Polycarbonate.
Body: Aluminum.

Light Source and electronics


2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA

Tunable White:
1 x LED 8,9 W 500 mA
(max. combined)

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m³
Gross weight 1,5 Kg Net weight 1 Kg

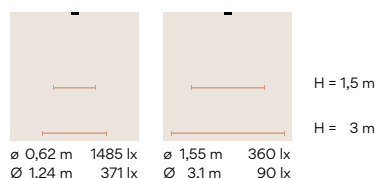

Luminaire types

Bind track is compatible with the Skan, Slim, North, Tempo and Tube pendant collections, presenting a range of decorative silhouettes with multiple lighting effects. Single or multiple pendant can be suspended as desired, allowing for the formation of intricate chandeliers created from a compilation of tracks with multiple pendant.

Pendant



6560 (11 Black)
6561 (24 Beige)

6570 (11 Black)
6571 (24 Beige)

6575 (11 Black)
6576 (24 Beige)

6590 (11 Black)
6591 (24 Beige)



6580 (11 Black))
6581 (24 Beige)

6583 (11 Black)
6584 (24 Beige)

6586 (11 Black)
6587 (24 Beige)



Multiple fixtures can be connected at any point using a pincer.

- Black (NCS S 8500-N)
- Beige M1 (NCS S 2005-Y50R)

6560
Black pincer
6561
Beige pincer

Finishes (shade)	LED Colour Temperature
10/ _ _ White (NCS S 0300-N)	/1 _ 2700 K - 1269 lm D
11/ _ _ Black (NCS S 8500-N)	CRI >90
24/ _ _ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 1123 lm D
37/ _ _ Terra Red (NCS S4040-Y70R)	CRI >80
42/ _ _ Blue M1 (NCS S 1000-N)	/3 _ 3500 K - 1374,9 lm G
47/ _ _ Green L1 (NCS S 4005-G80Y)	CRI >90
Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	

Control
6560 _ _ / _ _
6561 _ _ / _ _
_ _ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ Z Casambi (P2P)

6560

Finishes (pincer)
Black (NCS S 8500-N)

6561

Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials

Body: Aluminum.
Diffuser: PMMA.

Light Source and electronics


1 x LED 9,3 W 350 mA
Constant Current 350 mA
110-277V 50/60Hz

Packaging

1 Box 0,29 x 0,38 x 0,38 m
Vol 0,0418 m³
Gross weight 2,6 Kg Net weight 1,4 Kg

Notes

Extra cable length.



6570 Black pincer	6571 Beige pincer	Finishes (shade) 10/ _ _ White (NCS S 0300-N) 11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 47/ _ _ Green L1 (NCS S 4005-G80Y) 68/ _ _ Ocre (NCS S 3050-Y30R)	LED Colour Temperature /1 _ 2700 K - 181,22 lm F CRI >90 /2 _ 3000 K - 163,2 lm G CRI >80 /3 _ 3500 K - 207,6 lm F CRI >90	Control 6570 _ _ / _ _ 6571 _ _ / _ _ __ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line __ / _ Z Casambi (P2P)
-----------------------------	-----------------------------	---	---	--

- 6570**
Finishes (pincer)

Black (NCS S 8500-N)
- 6571**
Finishes (pincer)

Beige M1 (NCS S 2005-Y50R)

Materials Diffuser: Glass. Body: FG- Fiberglass.	Packaging 1 Box 0,17 x 0,19 x 1,21 m Vol 0,0370 m³ Gross weight 2,48 Kg Net weight 1,35 Kg
Light Source and electronics 1 x LED 2,1 W 700 mA Constant Current 700 mA 100~240V 50/60Hz	Notes Extra cable length.
LED ⓘ IP20 CE UK ENEC	

6575 Black pincer	6576 Beige pincer	Finishes (shade) 10/ _ _ White (NCS S 0300-N) 11/ _ _ Black (NCS S 8500 N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 42 / _ _ Blue M1 (NCS S 5010-B10G)	LED Colour Temperature /1 _ 2700 K - 1269 lm D CRI >90 /2 _ 3000 K - 1123 lm D CRI >80 /3 _ 3500 K - 1374,9 lm G CRI >90	Control 6575 _ _ / _ _ 6576 _ _ / _ _ __ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line __ / _ Z Casambi (P2P)
-----------------------------	-----------------------------	--	---	--

- 6575**
Finishes (pincer)

Black (NCS S 8500-N)
- 6576**
Finishes (pincer)

Beige M1 (NCS S 2005-Y50R)

Materials Shade: Aluminum. Diffuser: PMMA.	Packaging 1 Box 0,24 x 0,217 x 0,217 m Vol 0,01 m³ Gross weight 2,3 Kg Net weight 1,25 Kg
Light Source and electronics 1 x LED 9 W 350 mA Constant Current 350 mA 110~240V 50/60Hz	Notes Extra cable length.
LED ⓘ IP20 CE UK ENEC	

6590

Black pincer

6591

Beige pincer

Finishes (shade)

- 10/ _ _ White
(NCS S 0300-N)
- 15/ _ _ Grey L2
(NCS S 2500-N)
- 16/ _ _ Grey M1
(NCS S 4500-N)
- 21/ _ _ Black Grey
(NCS S 7000-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)

Finish customization

(Available options:
Vibia colour palette

Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

- /1 _ 2700 K - 1170 lm
- /2 _ 3000 K - 1251 lm
- /3 _ 3500 K - 1251 lm



CRI >90

Control

6590 _ _ / _ _

6591 _ _ / _ _

_ _ / _ F On/Off; Push; 1-10V; DALI-2;
Casambi Simultaneous Line

_ _ / _ Z Casambi (P2P)

6590

Finishes (pincer)

- Black (NCS S 8500-N)

6591

Finishes (pincer)

- Beige M1 (NCS S 2005-Y50R)

Materials

Diffuser: PC- Polycarbonate.

Shade: Aluminum.

Led support: Aluminum.

Tube: Steel.

Light Source and electronics

1 x LED PLATE 10,5 W 15 V

Constant Current 700 mA

110~240V 50/60Hz

Packaging

1 Box 0,29 x 0,38 x 0,38 m

Vol 0,0418 m³

Gross weight 2,6 Kg Net weight 1,4 Kg

Notes

Extra cable length.

LED IP20

6580

Black pincer

6581

Beige pincer

Finishes (shade)

- 18/ _ _ Graphite
(ADAPTA RF9913WX)
- 37/ _ _ Terra Red
(NCS S 4040-Y70R)
- 58/ _ _ Cream
(RAL 7044)
- 62/ _ _ Green
(NCS S 3010-G20Y)

LED Colour Temperature

- /1 _ 2700 K - 415 lm



CRI >90

Control

6580 _ _ / _ _

6581 _ _ / _ _

_ _ / _ F On/Off; Push; 1-10V; DALI-2;
Casambi Simultaneous Line

_ _ / _ Z Casambi (P2P)

6580

Finishes (pincer)

- Black (NCS S 8500-N)

6581

Finishes (pincer)

- Beige M1 (NCS S 2005-Y50R)

Materials

Diffuser: Blown-glass.

Body: Aluminum

Light Source and electronics

1 x LED 4 W 350 mA

Constant Current 350 mA

110~240V 50/60Hz

Packaging

1 Box 0,28 x 0,26 x 0,13 m

Vol 0,01 m³

Gross weight 2,5 Kg Net weight 2 Kg







Notes

Extra cable length.

LED IP20

6583 Black pincer 6584 Beige pincer	Finishes (shade) 18/ __ Graphite (ADAPTA RF9913WX) 37/ __ Terra Red (NCS S 4040-Y70R)
---	---

Select your model at vibia.com and adjust



See more
multiple models
at vibia.com

Tracks

Ceiling Tracks

- A491 120 cm
- A492 210 cm
- A493 300 cm



Ceiling Tracks 120 cm A491 __ / OM
Ceiling Tracks 210 cm A492 __ / OM
Ceiling Tracks 300 cm A493 __ / OM

Finishes		Packaging A491	Packaging A492	Packaging A493
● 11/ OM Black (NCS S 8500-N)		1 Box	1 Box	1 Box
● 24/ OM Beige M1 (NCS S 2005-Y50R)		0,068 x 0,068 x 1,25 m	0,068 x 0,068 x 2,4 m	0,068 x 0,068 x 3,15 m
Materials		Vol 0,0058 m³	Vol 0,0111 m³	Vol 0,0146 m³
Track: Aluminum.		Gross weight 1,75 Kg	Gross weight 3,24 Kg	Gross weight 4,36 Kg
Canopy: ABS + Polycarbonate.		Net weight 0,90 Kg	Net weight 1,62 Kg	Net weight 2,17 Kg
IP20 CE UK ENEC				



Pendant Tracks

- A419 120 cm (H 9m)
- A422 210 cm (H 9m)
- A425 300 cm (H 9m)



Height 9 m 120 cm A419 __ / OM
Height 9 m 210 cm A422 __ / OM
Height 9 m 300 cm A425 __ / OM

Finishes		Packaging A419	Packaging A422	Packaging A425
● 11/ OM Black (NCS S 8500-N)		1 Box	1 Box	1 Box
● 24/ OM Beige M1 (NCS S 2005-Y50R)		0,068 x 0,068 x 1,25 m	0,068 x 0,068 x 2,4 m	0,068 x 0,068 x 3,15 m
Materials		Vol 0,0058 m³	Vol 0,0111 m³	Vol 0,0146 m³
Track: Aluminum.		Gross weight 1,87 Kg	Gross weight 3,24 Kg	Gross weight 4,36 Kg
Canopy: Aluminum.		Net weight 1,02 Kg	Net weight 1,62 Kg	Net weight 2,17 Kg
Ceiling supports: Aluminum.				
IP20 CE UK ENEC				



Electrical connection options

Driver for ceiling

A494 __ / ____	A495 __ / ____
__ / 00_10 48W + On/ Off + Surface	__ / 00_10 84W + On/ Off + Surface
__ / 00_31 48W + On/ Off + Remote Micro	__ / 00_31 84W + On/ Off + Remote Micro
__ / 01_10 48W + DALI-2 + Surface	__ / 01_10 84W + DALI-2 + Surface
__ / 01_31 48W + DALI-2 + Remote Micro	__ / 01_31 84W + DALI-2 + Remote Micro
__ / 03_10 48W + 1-10V + Surface	__ / 03_10 84W + 1-10V + Surface
__ / 03_31 48W + 1-10V + Remote Micro	__ / 03_31 84W + 1-10V + Remote Micro
__ / 05_10 48W + Push + Surface	__ / 05_10 84W + Push + Surface
__ / 05_31 48W + Push + Remote Micro	__ / 05_31 84W + Push + Remote Micro
__ / 0Z_10 48W + Casambi + Surface	__ / 0Z_10 84W + Casambi + Surface
__ / 0Z_31 48W + Casambi + Remote Micro	__ / 0Z_31 84W + Casambi + Remote Micro

Finishes ● 11/ 0 _ Black (NCS S 8500-N) ● 24/ 0 _ Beige M1 (NCS S 2005-Y50R) Materials Aluminum. 	Electrical connection Driver Constant Voltage 48V 220-240V 50/60Hz Notes Max. 5 luminaires with Simultaneous line 48 W. Max.10 luminaires with Simultaneous line 84 W. Select On/ Off if your luminaires are P2P.	Packaging 1 Box 0,12 x 0,10 x 0,37 m Vol 0,0273 m³ Gross weight 0,95 Kg Net weight 0,53 Kg
---	--	---

 Select Electrical connection



L 30 cm.
A494 __ / 00 A495 __ / 00

Surface

Surface

L 40 cm.
A494 __ / 01 A495 __ / 01
A494 __ / 03 A495 __ / 03
A494 __ / 05 A495 __ / 05
A494 __ / 0Z A495 __ / 0Z



Remote

Included in tracks electrical connections



Remote
1 x 9 m
electrical cable
included

Driver for pendant

A426 __ / ____

__ / 00_10 48W + On/ Off + Surface
 __ / 00_23 48W + On/ Off + Built-in XS
 __ / 00_31 48W + On/ Off + Remote Micro
 __ / 01_10 48W + DALI-2 + Surface
 __ / 01_23 48W + DALI-2 + Built-in XS
 __ / 01_31 48W + DALI-2 + Remote Micro
 __ / 03_10 48W + 1-10V + Surface
 __ / 03_23 48W + 1-10V + Built-in XS
 __ / 03_31 48W + 1-10V + Remote Micro
 __ / 05_10 48W + Push + Surface
 __ / 05_23 48W + Push + Built-in XS
 __ / 05_31 48W + Push + Remote Micro
 __ / 0Z_10 48W + Casambi + Surface
 __ / 0Z_23 48W + Casambi + Built-in XS
 __ / 0Z_31 48W + Casambi + Remote Micro

A427 __ / ____

__ / 00_10 84W + On/ Off + Surface
 __ / 00_23 84W + On/ Off + Built-in XS
 __ / 00_31 84W + On/ Off + Remote Micro
 __ / 01_10 84W + DALI-2 + Surface
 __ / 01_23 84W + DALI-2 + Built-in XS
 __ / 01_31 84W + DALI-2 + Remote Micro
 __ / 03_10 84W + 1-10V + Surface
 __ / 03_23 84W + 1-10V + Built-in XS
 __ / 03_31 84W + 1-10V + Remote Micro
 __ / 05_10 84W + Push + Surface
 __ / 05_23 84W + Push + Built-in XS
 __ / 05_31 84W + Push + Remote Micro
 __ / 0Z_10 84W + Casambi + Surface
 __ / 0Z_23 84W + Casambi + Built-in XS
 __ / 0Z_31 84W + Casambi + Remote Micro

Finishes

- 11/ 0 _ Black (NCS S 8500-N)
- 24/ 0 _ Beige M1 (NCS S 2005-Y50R)

Materials

Surface: Aluminum.
 Built-in and Remote Driver box: Steel.



Electrical connection

Driver Constant Voltage 48V
 220~240V 50/60Hz

Notes

Max. 5 luminaires with Simultaneous line 48 W.
 Max.10 luminaires with Simultaneous line 84 W.
 Select On/ Off if your luminaires are P2P.

Packaging

1 Box 0,12 x 0,10 x 0,37 m
 Vol 0,0273 m³
 Gross weight 0,95 Kg
 Net weight 0,53 Kg

Select Electrical connection



L 25 cm.

A426 __ / 01 A427 __ / 00
 A426 __ / 03 A427 __ / 01
 A426 __ / 05 A427 __ / 03
 A426 __ / 0Z A427 __ / 05
 A426 __ / 0Z A427 __ / 0Z

Surface



L 21 cm.

A426 __ / 00

Surface



Built-in XS



Remote Micro

Included in tracks electrical connections



Surface
 Feeder + 9 m
 electrical
 cable included



Built-in
 Canopy + 9 m
 electrical
 cable included



Remote
 Micro canopy + 9 m
 electrical
 cable included

Bind Solo

Bind Solo provides a set of tools to play with contrasts, defining functional and transitional areas, as well as hybrid activity zones. The range can be mounted to the ceiling as desired, creating visual hierarchy by directing the gaze towards specific features and combining to form unique compositions overhead.

Ceiling - Accent Downlight - Micro

6600 Narrow
6604 Medium
Ø 3 cm



6650 Narrow
6654 Medium
6658 Wide
Ø 4cm



6600
Narrow
6604
Medium

6600 Narrow

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm

F >

CRI >90

Control

6600 _ _ / _ _

- _ _ / _ **O** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics


1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,63 Kg Net weight 0,15 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point.



6604 Medium

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm

F >

CRI >90

Control

6604 _ _ / _ _

- _ _ / _ **O** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics



1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,63 Kg Net weight 0,15 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point.

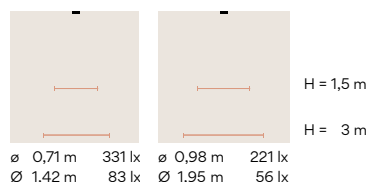

6650 Narrow 6654 Medium 6658 Wide	6650 Narrow Finishes 11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) LED Colour Temperature /1 _ 2700 K - 530 lm /2 _ 3000 K - 554 lm /3 _ 3500 K - 574 lm F CRI >90 Control 6650 _ _ / _ _ _ _ / _ O On/ Off (Remote) _ _ / _ D Push; DALI-2 (Remote) _ _ / _ M Without driver _ _ / _ Z Casambi (Remote)	Materials Body: Aluminum. Lens: PMMA. Light Source and electronics 1 x LED 5,2 W 300 mA Constant Current 300 mA 220~240V 50/60Hz Packaging 1 Box 0,065 x 0,145 x 0,275 m Vol 0,0026 m³ Gross weight 0,68 Kg Net weight 0,2 Kg Notes Visit vibia.com to group several pieces with just one electrical point. LED IP20 CE UK ENEC
	6654 Medium Finishes 11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R) LED Colour Temperature Static White /1 _ 2700 K - 530 lm /2 _ 3000 K - 554 lm /3 _ 3500 K - 574 lm Tunable White /8 _ (1800 K - 4000 K) 308 lm - 504 lm F CRI >90 Control 6654 _ _ / _ _ _ _ / _ O Static White + On/ Off (Remote) _ _ / _ D Static White + Push; DALI-2 (Remote) _ _ / _ M Static White + Without driver _ _ / _ Z Static White + Casambi (Remote) _ _ / 81 Tunable White + DALI-2 DT8 (Remote) _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi (Remote)	Materials Body: Aluminum. Lens: PMMA. Light Source and electronics 2700 K - 3000 K - 3500K: 1 x LED 5,2 W 300 mA Constant Current 300 mA 220~240V 50/60Hz Tunable White: 1 x LED 5,5 W 150 mA Constant Current 150 mA 110~240V 50/60Hz Packaging 1 Box 0,065 x 0,145 x 0,275 m Vol 0,0026 m³ Gross weight 0,68 Kg Net weight 0,2 Kg Notes Visit vibia.com to group several pieces with just one electrical point, only for Static White. LED IP20 CE UK ENEC

6658 Wide

- Finishes**
- 11/ _ _ Black
(NCS S 8500-N)
 - 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 530 lm
 - /2 _ 3000 K - 554 lm
 - /3 _ 3500 K - 574 lm

- Tunable White**
- /8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6658 _ _ / _ _

- _ _ / _ O Static White +
On/ Off (Remote)
- _ _ / _ D Static White +
Push; DALI-2 (Remote)
- _ _ / _ M Static White +
Without driver
- _ _ / _ Z Static White +
Casambi (Remote)
- _ _ / 81 Tunable White +
DALI-2 DT8 (Remote)
- _ _ / 8M Tunable White +
Without driver
- _ _ / 8Z Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 350 mA
220~240V 50/60Hz




Packaging


1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED IP20 CE UK ENEC

			H = 1,5 m
ø 0,38 m 1574 lx Ø 0,75 m 393 lx	ø 0,95 m 335 lx Ø 1,9 m 90 lx	ø 1,45 m 163 lx Ø 2,9 m 41 lx	H = 3 m

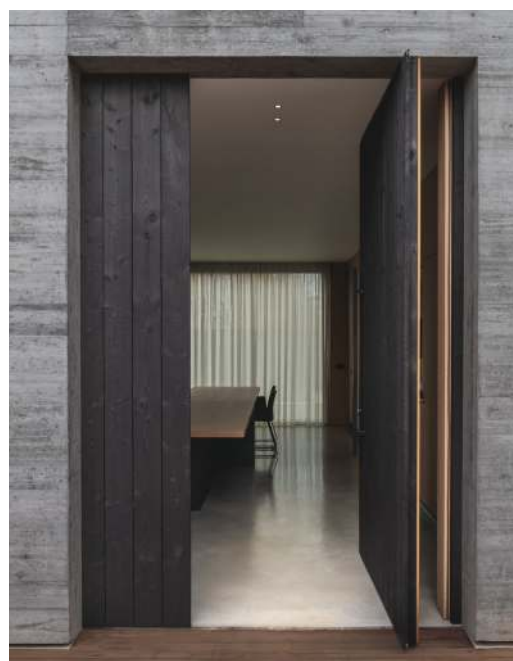

Ceiling - Accent Downlight

6610 Narrow
6614 Medium
Ø 3 x 4 cm



6630 Narrow
6634 Medium
Ø 3 x 10 cm



6660 Narrow
6664 Medium
6668 Wide
Ø 4 x 7 cm



6680 Narrow
6684 Medium
6688 Wide
Ø 4 x 10 cm



Ceiling - Accent Spotlight

6620 Narrow
6624 Medium
Ø 3 x 7 cm



6640 Narrow
6644 Medium
Ø 3 x 11,5 cm



6670 Narrow
6674 Medium
6678 Wide
Ø 4 x 10 cm



6690 Narrow
6694 Medium
6698 Wide
Ø 4 x 14 cm



Ceiling - Wide Accent Downlight

6700 Medium
6702 Wide



6610
Narrow
6614
Medium

6610 Narrow

- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm

F >

CRI >90

Control

6610 __ / __

- __ / __ **O** On/ Off (Remote)
- __ / __ **D** Push; DALI-2 (Remote)
- __ / __ **M** Without driver
- __ / __ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,66 Kg Net weight 0,18 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point.

LED IP20 CE UK ENEC

6614 Medium

- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm

F >

CRI >90

Control

6614 __ / __

- __ / __ **O** On/ Off (Remote)
- __ / __ **D** Push; DALI-2 (Remote)
- __ / __ **M** Without driver
- __ / __ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,66 Kg Net weight 0,18 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point.

LED IP20 CE UK ENEC

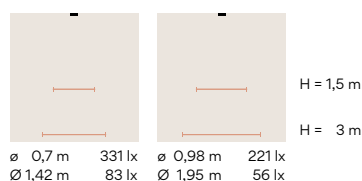

6630

Narrow

6634

Medium

6630 Narrow

Finishes

11/ _ _ Black

(NCS S 8500-N)

24/ _ _ Beige M1

(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm

/2 _ 3000 K - 471 lm

/3 _ 3500 K - 489 lm

F

CRI >90

Control

6630 _ _ / _ _

_ _ / _ 0 On/ Off (Remote)

_ _ / _ D Push; DALI-2 (Remote)

_ _ / _ M Without driver

_ _ / _ Z Casambi (Remote)

Materials

Body: Aluminum.

Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA

Constant Current 250 mA

220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m

Vol 0,0026 m³

Gross weight 0,67 Kg Net weight 0,19 Kg

Notes

Visit [vibia.com](#) to group several pieces with just one electrical point.

LED

IP20

CE

UK

ErC

6634 Medium

Finishes

11/ _ _ Black

(NCS S 8500-N)

24/ _ _ Beige M1

(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm

/2 _ 3000 K - 471 lm

/3 _ 3500 K - 489 lm

F

CRI >90

Control

6634 _ _ / _ _

_ _ / _ 0 On/ Off (Remote)

_ _ / _ D Push; DALI-2 (Remote)

_ _ / _ M Without driver

_ _ / _ Z Casambi (Remote)

Materials

Body: Aluminum.

Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA

Constant Current 250 mA

220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m

Vol 0,0026 m³

Gross weight 0,67 Kg Net weight 0,19 Kg

Notes

Visit [vibia.com](#) to group several pieces with just one electrical point.

LED

IP20

CE

UK

ErC

6660
Narrow
6664
Medium
6668
Wide

6660 Narrow

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F >

CRI >90

Control

6660 _ _ / _ _

- _ _ / _ **O** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum
Lens: PMMA.

Light Source and electronics


1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,72 Kg Net weight 0,24 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point.



6664 Medium

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F >

CRI >90

Control

6664 _ _ / _ _

- _ _ / _ **O** Static White +
On/ Off (Remote)
- _ _ / _ **D** Static White +
Push; DALI-2 (Remote)
- _ _ / _ **M** Static White +
Without driver
- _ _ / _ **Z** Static White +
Casambi (Remote)
- _ _ / **81** Tunable White +
DALI-2 DT8 (Remote)
- _ _ / **8M** Tunable White +
Without driver
- _ _ / **8Z** Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz


Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,72 Kg Net weight 0,24 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point, only for Static White.



6668 Wide

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 530 lm
 - /2 _ 3000 K - 554 lm
 - /3 _ 3500 K - 574 lm

- Tunable White**
- /8 _ (1800 K - 4000 K)
308 lm - 504 lm

F >

CRI >90

Control

- 6668 _ _ / _ _
- _ _ / _ **O** Static White +
On/ Off (Remote)
 - _ _ / _ **D** Static White +
Push; DALI-2 (Remote)
 - _ _ / _ **M** Static White +
Without driver
 - _ _ / _ **Z** Static White +
Casambi (Remote)
-
- _ _ / **81** Tunable White +
DALI-2 DT8 (Remote)
 - _ _ / **8M** Tunable White +
Without driver
 - _ _ / **8Z** Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,72 Kg Net weight 0,24 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED IP20 CE UK ENE

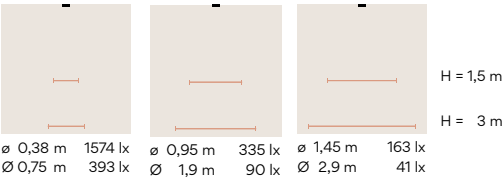

6680
Narrow
6684
Medium
6688
Wide

6680 Narrow

Finishes	LED Colour Temperature
● 11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K - 530 lm
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 554 lm
	/3 _ 3500 K - 574 lm
	F >
	CRI >90

Control

6680 _ _ / _ _

_ _ / _ **O** On/ Off (Remote)
_ _ / _ **D** Push; DALI-2 (Remote)
_ _ / _ **M** Without driver
_ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0072 m³
Gross weight 0,73 Kg Net weight 0,25 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point.

LED **IP20** **CE** **UK** **ETL** **RoHS**

6684 Medium

Finishes	LED Colour Temperature
● 11/ _ _ Black (NCS S 8500-N)	Static White
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/1 _ 2700 K - 530 lm
	/2 _ 3000 K - 554 lm
	/3 _ 3500 K - 574 lm
	Tunable White
	/8 _ (1800 K - 4000 K) 308 lm - 504 lm
	F >
	CRI >90

Control

6684 _ _ / _ _

_ _ / _ **O** Static White +
On/ Off (Remote)
_ _ / _ **D** Static White +
Push; DALI-2 (Remote)
_ _ / _ **M** Static White +
Without driver
_ _ / _ **Z** Static White +
Casambi (Remote)
_ _ / **81** Tunable White +
DALI-2 DT8 (Remote)
_ _ / **8M** Tunable White +
Without driver
_ _ / **8Z** Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:

1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging




1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0072 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED **IP20** **CE** **UK** **ETL** **RoHS**

6688 Wide		
Finishes	LED Colour Temperature	Control
● 11/ _ _ Black (NCS S 8500-N)	Static White	6688 _ _ / _ _
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/1 _ 2700 K - 530 lm	_ _ / _ O Static White + On/ Off (Remote)
	/2 _ 3000 K - 554 lm	_ _ / _ D Static White + Push; DALI-2 (Remote)
	/3 _ 3500 K - 574 lm	_ _ / _ M Static White + Without driver
	Tunable White	_ _ / _ Z Static White + Casambi (Remote)
	/8 _ (1800 K - 4000 K)	
	308 lm - 504 lm	_ _ / 81 Tunable White + DALI-2 DT8 (Remote)
	F	_ _ / 8M Tunable White + Without driver
	CRI >90	_ _ / 8Z Tunable White + Casambi (Remote)
Materials	Packaging	
Body: Aluminum.	1 Box 0,065 x 0,145 x 0,275 m	
Lens: PMMA.	Vol 0,0072 m³	
Light Source and electronics	Gross weight 0,78 Kg Net weight 0,3 Kg	
2700 K - 3000 K - 3500K:	Notes	
1 x LED 5,2 W 300 mA	Visit vibia.com to group several pieces with just one	
Constant Current 350 mA	electrical point, only for Static White.	
220~240V 50/60Hz	LED IP20 CE UK ENE	
Tunable White:		
1 x LED 5,5 W 150 mA		
Constant Current 150 mA		
110~240V 50/60Hz		

			H = 1,5 m
ø 0,38 m 1574 lx ø 0,75 m 393 lx	ø 0,95 m 335 lx ø 1,9 m 90 lx	ø 1,45 m 163 lx ø 2,9 m 41 lx	H = 3 m



6620
Narrow
6624
Medium

6620 Narrow

Finishes
 ● **11/** __ Black
 (NCS S 8500-N)
 ● **24/** __ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F >90
 CRI >90

Control

6620 __ / __

__ / __ **O** On/ Off (Remote)
 __ / __ **D** Push; DALI-2 (Remote)
 __ / __ **M** Without driver
 __ / __ **Z** Casambi (Remote)

Materials

Body: Aluminum.
 Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
 Constant Current 250 mA
 220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
 Vol 0,0026 m³
 Gross weight 0,68 Kg Net weight 0,2 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point.

LED IP20 CE UK ENEC

6624 Medium

Finishes
 ● **11/** __ Black
 (NCS S 8500-N)
 ● **24/** __ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F >90
 CRI >90

Control

6624 __ / __

__ / __ **O** On/ Off (Remote)
 __ / __ **D** Push; DALI-2 (Remote)
 __ / __ **M** Without driver
 __ / __ **Z** Casambi (Remote)

Materials

Body: Aluminum.
 Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
 Constant Current 250 mA
 220~240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m
 Vol 0,0026 m³
 Gross weight 0,68 Kg Net weight 0,2 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point.

LED IP20 CE UK ENEC

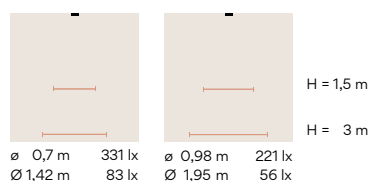

6640 Narrow 6644 Medium	6640 Narrow			
	Finishes	LED Colour Temperature	Control	
	11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/1 _ 2700 K - 451 lm /2 _ 3000 K - 471 lm /3 _ 3500 K - 489 lm F > CRI >90	6640 _ _ / _ _ __ / _ O On/ Off (Remote) __ / _ D Push; DALI-2 (Remote) __ / _ M Without driver __ / _ Z Casambi (Remote)	
Materials		Packaging		
Body: Aluminum.		1 Box 0,065 x 0,145 x 0,275 m		
Lens: PMMA.		Vol 0,0026 m³		
Light Source and electronics		Gross weight 0,69 Kg Net weight 0,21 Kg		
1 x LED 4,3 W 250 mA		Notes		
Constant Current 250 mA		Visit vibia.com to group several pieces with just one		
220~240V 50/60Hz		electrical point.		
LED IP20 CE UK ENEC				
6644 Medium				
	Finishes	LED Colour Temperature	Control	
	11/ _ _ Black (NCS S 8500-N) 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/1 _ 2700 K - 451 lm /2 _ 3000 K - 471 lm /3 _ 3500 K - 489 lm F > CRI >90	6644 _ _ / _ _ __ / _ O On/ Off (Remote) __ / _ D Push; DALI-2 (Remote) __ / _ M Without driver __ / _ Z Casambi (Remote)	
	Materials		Packaging	
	Body: Aluminum.		1 Box 0,065 x 0,145 x 0,275 m	
	Lens: PMMA.		Vol 0,0026 m³	
	Light Source and electronics		Gross weight 0,69 Kg Net weight 0,21 Kg	
	1 x LED 4,3 W 250 mA		Notes	
	Constant Current 250 mA		Visit vibia.com to group several pieces with just one	
	220~240V 50/60Hz		electrical point.	
	LED IP20 CE UK ENEC			
ø 0,7 m 331 lx ø 1,42 m 83 lx ø 0,98 m 221 lx ø 1,95 m 56 lx H = 1,5 m H = 3 m				

6670
Narrow
6674
Medium
6678
Wide

6670 Narrow

Finishes
● **11/** _ _ Black
(NCS S 8500-N)
● **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control

6670 _ _ / _ _
_ _ / _ **O** On/ Off (Remote)
_ _ / _ **D** Push; DALI-2 (Remote)
_ _ / _ **M** Without driver
_ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,1 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point.

LED IP20 CE UK ENEC

6674 Medium

Finishes
● **11/** _ _ Black
(NCS S 8500-N)
● **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control

6674 _ _ / _ _
_ _ / _ **O** Static White +
On/ Off (Remote)
_ _ / _ **D** Static White +
Push; DALI-2 (Remote)
_ _ / _ **M** Static White +
Without driver
_ _ / _ **Z** Static White +
Casambi (Remote)
_ _ / **81** Tunable White +
DALI-2 DT8 (Remote)
_ _ / **8M** Tunable White +
Without driver
_ _ / **8Z** Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 350 mA
220~240V 50/60Hz
Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED IP20 CE UK ENEC

6678 Wide

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 530 lm
 - /2 _ 3000 K - 554 lm
 - /3 _ 3500 K - 574 lm

- Tunable White**
- /8 _ (1800 K - 4000 K)
308 lm - 504 lm



CRI >90

Control

6678 _ _ / _ _

- _ _ / _ **O** Static White +
On/ Off (Remote)
- _ _ / _ **D** Static White +
Push; DALI-2 (Remote)
- _ _ / _ **M** Static White +
Without driver
- _ _ / _ **Z** Static White +
Casambi (Remote)
- _ _ / **81** Tunable White +
DALI-2 DT8 (Remote)
- _ _ / **8M** Tunable White +
Without driver
- _ _ / **8Z** Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:

1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:


1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

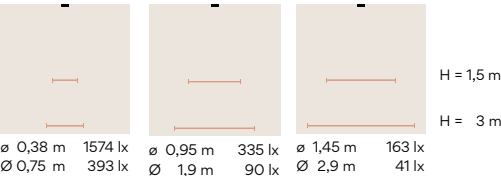

6690
Narrow
6694
Medium
6698
Wide

6690 Narrow

Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1 _ 2700 K - 530 lm
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 554 lm
	/3 _ 3500 K - 574 lm
	F >
	CRI >90

Control

6690 __ / __

__ / __ **O** On/ Off (Remote)
 __ / __ **D** Push; DALI-2 (Remote)
 __ / __ **M** Without driver
 __ / __ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED PLATE 5,2 W 300 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point.

LED IP20 CE UK ENE Dimmer

6694 Medium

Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	Static White
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/1 _ 2700 K - 530 lm
	/2 _ 3000 K - 554 lm
	/3 _ 3500 K - 574 lm
	Tunable White
	/8 _ (1800 K - 4000 K) 308 lm - 504 lm
	F >
	CRI >90

Control

6694 __ / __

__ / __ **O** Static White +
On/ Off (Remote)
 __ / __ **D** Static White +
Push; DALI-2 (Remote)
 __ / __ **M** Static White +
Without driver
 __ / __ **Z** Static White +
Casambi (Remote)
 __ / **81** Tunable White +
DALI-2 DT8 (Remote)
 __ / **8M** Tunable White +
Without driver
 __ / **8Z** Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:

1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED IP20 CE UK ENE

6698 Wide

Finishes

- 11/ _ _ Black
(NCS S 8500-N)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1 _ 2700 K - 530 lm
 - /2 _ 3000 K - 554 lm
 - /3 _ 3500 K - 574 lm

- Tunable White**
- /8 _ (1800 K - 4000 K)
308 lm - 504 lm

F >

CRI >90

Control

- 6698 _ _ / _ _
- _ _ / _ O Static White +
On/ Off (Remote)
 - _ _ / _ D Static White +
Push; DALI-2 (Remote)
 - _ _ / _ M Static White +
Without driver
 - _ _ / _ Z Static White +
Casambi (Remote)
-
- _ _ / 81 Tunable White +
DALI-2 DT8 (Remote)
 - _ _ / 8M Tunable White +
Without driver
 - _ _ / 8Z Tunable White +
Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes

Visit vibia.com to group several pieces with just one electrical point, only for Static White.

LED IP20 CE UK ENEC

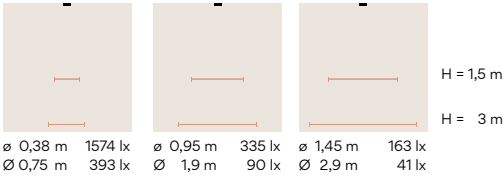

6700
Medium
6702
Wide

6700 Medium

- Finishes
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm

F

CRI >90

Control

6700 _ _ / _ _

_ _ / _ **D** Static White +
Push; DALI-2

_ _ / _ **Z** Static White +
Casambi

_ _ / **81** Tunable White +
DALI-2 DT8

_ _ / **8Z** Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Constant Current 700 mA
220-240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
110-240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m³
Gross weight 1,7 Kg Net weight 1,2 Kg

LED IP20 CE UK ENEC

6702 Wide

- Finishes
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm

F

CRI >90

Control

6702 _ _ / _ _

_ _ / _ **D** Static White +
Push; DALI-2

_ _ / _ **Z** Static White +
Casambi

_ _ / **81** Tunable White +
DALI-2 DT8

_ _ / **8Z** Tunable White +
Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.

Light Source and electronics


2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Constant Current 700 mA
220-240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
110-240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m³
Gross weight 1,7 Kg Net weight 1,2 Kg


LED IP20 CE UK ENEC

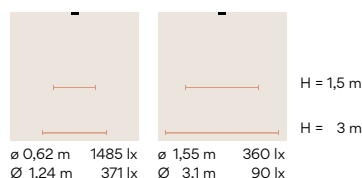

Sticks

Design by Arik Levy

Fusing technology, space, and architecture, Sticks offers a creative toolkit for integrating light elements in an interior. Pure and graphic, the minimalist aluminum rods transform linear light into floating sculpture.

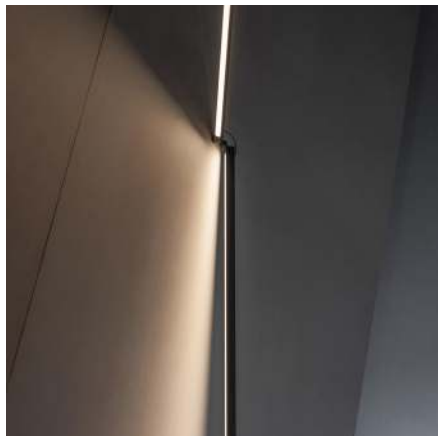

You can chose the desired composition through one of the following three options:

A - Choose among pre-designed layouts the one that fits with your project and order it directly (see page 466).

B - Select one composition on vibia.com among multiple applications in spaces, and adjust it to your project by modifying:

- + Length of the sticks.
- + Position of each stick in the space.
- + Colour temperature and dimming.
- + Installation type.



C - Create your configuration on vibia.com from scratch in three easy steps, without sketches.

Choose the location for your electrical connection point



Add connectable Sticks up to 6.5 meters



Configure
+ Colour temperature
+ Dimming control
+ Installation type
+ Pendant height



Technical Specifications

(see page 476)

The Sticks collection has three sizes: 1.5 m, 2 m, or 3 m, and they can be connected one to each other to a total maximum length of 6.5 meters per electrical connection.

Wall-Wall / Ceiling-Ceiling



7300

Stick 152 x 3 x 2 cm


7303

Stick 201 x 3 x 2 cm

7306

Stick 300 x 3 x 2 cm

Wall-Wall (corner) / Wall-Ceiling



7330

Stick 158 x 3 x 2 cm

7333

Stick 207 x 3 x 2 cm

7336

Stick 306 x 3 x 2 cm

Wall-Pendant



7310

7311 UGR<19

Stick 153 x 3 x 2 cm

7313

7314 UGR<19


Stick 204 x 3 x 2 cm

7316

7317 UGR<19

Stick 303 x 3 x 2 cm

Pendant-Pendant



7320

7321 UGR<19

Stick 152 x 3 x 2 cm

7323

7324 UGR<19

Stick 201 x 3 x 2 cm

7326

7327 UGR<19

Stick 300 x 3 x 2 cm

Pendant



7350

Stick 152 x 3 x 2 cm

7353

Stick 201 x 3 x 2 cm

7356

Stick 300 x 3 x 2 cm

Floor-Wall



7346

Stick 310 cm

7343

Stick 211 cm

7340


Stick 163 cm

ø 10 cm

Sticks Connectable


Next sketches are composed by one or more compositions

Pendant / Ceiling




STI001
Sketch composed by two identical compositions.

Each composition:
3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.



STI005
Sketch composed by two identical compositions.


Each composition:
3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.



STI015
Sketch composed by two compositions.


Composition 1:
2 Sticks: 1 x 150 cm, 1 x 300 cm. Total 4,5 m.
LED 2700 K. 9779 lm. 79,2 W.
Built-in disc S canopy. 1-10V.

Composition 2:
1 Stick: 1 x 300 cm. Total 3 m.
LED 2700 K. 6519 lm. 52,8 W.
Built-in disc S canopy. 1-10V.



STI021
Sketch composed by four identical compositions.


Each composition:
2 Sticks: 2 x 200 cm. Total 4 m.
LED 3500 K. 9496 lm. 140,8 W.
Built-in disc S canopy. 1-10V.

**STIO25**

Sketch composed by four identical compositions.

Each composition:


2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Built-in disc S canopy. 1-10V.

**STIO35**

Sketch composed by four identical compositions.

Each composition:


2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.
LED 3500 K. 10683 lm. 79,2 W.
Built-in disc S canopy. 1-10V.

**STIO41**

Sketch composed by three identical compositions.

Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Built-in disc S canopy. 1-10V.

**STIO85**

Sketch composed by four identical compositions.


Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions


Some sticks are attached to the Wall



STI051
Sketch composed by two compositions.


Composition 1:
2 Sticks: 2 x 150 cm. Total 3 m.
LED 2700 K. 6520 lm. 52,8 W.
Floor base & plug. Push.

Composition 2:
1 Stick: 1 x 200 cm. Total 2 m.
LED 2700 K. 4346 lm. 35,2 W.
Floor base & plug. Push.




STI055
Sketch composed by only one composition.

3 Sticks: 3 x 150 cm. Total 4,5 m.
LED 2700 K. 9780 lm. 79,2 W.
Floor base & plug. Push.




STI061
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.
LED 2700 K. 13039 lm. 105,6 W.
Floor base & plug. Push.



STI065
Sketch composed by only one composition.

2 Sticks: 2 x 150 cm. Total 3 m.
LED 2700 K. 6520 lm. 52,8 W.
Floor base & plug. Push.


**STIO71**

Sketch composed by only one composition.

3 Sticks: 1 x 150 cm, 2 x 200 cm. Total 5,5 m.

LED 2700 K. 11952 lm. 96,8 W.

Floor base & plug. Push.

**STIO75**


Sketch composed by two identical compositions.

Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.

LED 3500 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V.

**STIO81**

Sketch composed by two compositions.

Composition 1:

3 Sticks: 1 x 150 cm, 1 x 200 cm, 1 x 300 cm. Total 6,5 m.

LED 3500 K. 15431 lm. 114,4 W.


Remote driver Built-in Micro. 1-10V.

Composition 2:

2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.

LED 3500 K. 11870 lm. 88 W.

Remote driver Built-in Micro. 1-10V.

**STIO91**

Sketch composed by two identical compositions.

Each composition:

2 Sticks: 2 x 200 cm. Total 4 m.


LED 2700 K. 8692 lm. 70,4 W.

Remote driver Built-in Micro. 1-10V.

Sticks Connectable


Next sketches are composed by one or more compositions

Some sticks are attached to the Wall



STI095
Sketch composed by two identical compositions.


Each composition:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.



STI101
Sketch composed by two compositions.


Composition 1:
2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.
LED 2700 K. 9779 lm. 79,2 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
1 Stick: 1 x 300 cm. Total 3 m.
LED 2700 K. 6519 lm. 52,8 W.
Remote driver Built-in Micro. 1-10V.




STI105
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Floor base & plug. Push.



STI111
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

**STI115**


Sketch composed by three identical compositions.

Each composition:

2 Sticks: 2 x 200 cm. Total 4 m.

LED 3500 K. 9496 lm. 70,4 W.

Built-in disc S canopy. 1-10V.

**STI131**

Sketch composed by four compositions.

Composition 1:

2 Sticks: 2 x 300 cm. Total 6 m.

LED 3500 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V.

Composition 3:

2 Sticks: 2 x 300 cm. Total 6 m.

LED 3500 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V.

Composition 2:

1 Stick: 1 x 150 cm. Total 1,5 m.

LED 3500 K. 3561 lm. 26,4 W.


Remote driver Built-in Micro. 1-10V.

Composition 4:

2 Sticks: 2 x 300 cm. Total 6 m.

LED 3500 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V.

**STI141**

Sketch composed by two identical compositions.

Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.


LED 3500 K. 14244 lm. 105,6 W.

Built-in disc S canopy. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions


Some sticks are on the Floor



STI151
Sketch composed by two compositions.


Composition 1:
1 Stick: 1 x 150 cm. Total 1,5 m.
LED 2700 K. 3260 lm. 26,4 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Remote driver Built-in Micro. 1-10V.



STI161
Sketch composed by two compositions.


Composition 1: 1 Stick: 1 x 200 cm. Total 2 m. LED 2700 K. 4336 lm. 35,2 W. Remote driver Built-in Micro. 1-10V.	Composition 2: 2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m. LED 2700 K. 10865 lm. 88 W. Remote driver Built-in Micro. 1-10V. Remote driver Built-in Micro. 1-10V.
--	---



STI171
Sketch composed by two compositions.

Composition 1:
3 Sticks: 3 x 200 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Surface canopy. 1-10V.


Composition 2:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Surface canopy. 1-10V.



STI175
Sketch composed by three identical compositions.

Each composition:
2 Sticks: 1 x 150 cm, 1 x 200 cm. Total 3,5 m.
LED 3500 K. 8309 lm. 61,6 W.
Surface canopy. 1-10V.

Some sticks are attached to the Wall



ST1145

Sketch composed by five identical compositions.

Each composition:

3 Sticks: 1 x 300 cm, 2 x 150 cm . Total 6 m.

LED 3500 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V

Each project is unique.
Visit vibia.com and chose among
multiple compositions designed
and adapted to your project needs.

Personalize your own Sticks composition
quick and easy at vibia.com.

Sticks Connectable

Elements to be configured

Wall-Wall / Ceiling-Ceiling
Wall-Wall (corner) / Wall-Ceiling
Wall-Pendant
Pendant-Pendant
Pendant-Ceiling
Pendant

Sticks 1,5 m.

7300 7310 7311 7320 7321 7330 7350

Temperature Colour

- /1 _ 2700 K  CRI >90 3260 lm 123 lm/W
/2 _ 3000 K  CRI >90 3510 lm 133 lm/W
/3 _ 3500 K  CRI >90 3480 lm 132 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 0,9 Kg.

Sticks 2 m.

7303 7313 7314 7323 7324 7333 7353

Temperature Colour

- /1 _ 2700 K  CRI >90 4346 lm 123 lm/W
/2 _ 3000 K  CRI >90 4680 lm 133 lm/W
/3 _ 3500 K  CRI >90 4640 lm 132 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,2 Kg.

Sticks 3 m.

7306 7316 7317 7326 7327 7336 7356

Temperature Colour

- /1 _ 2700 K  CRI >90 6519 lm 123 lm/W
/2 _ 3000 K  CRI >90 7020 lm 133 lm/W
/3 _ 3500 K  CRI >90 6960 lm 132 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 1,8 Kg.

Sticks: Aluminum.

Diffuser: PC- Polycarbonate.

Driver and Dimming depends on selected installation accesory (see page 477).

Suspension cables up to 3m. for Wall - Pendant and Pendant-Pendant.

Personalisation options available

- Extra cable length for Wall - Pendant and Pendant - Pendant.

Min. quantity, upcharge and extra lead time apply.

11 Black

(NCS S 8500-N)



Horizontal pendant version with a UGR index <19 available.

Floor-Wall

Sticks 1,5 m.

7340

Temperature Colour

- /1 _ 2700 K  CRI >90 3260 lm 123 lm/W
/2 _ 3000 K  CRI >90 2644 lm 100,15 lm/W
/3 _ 3500 K  CRI >90 3480 lm 132 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 1,5 Kg.

Sticks 2 m.

7343

Temperature Colour

- /1 _ 2700 K  CRI >90 4346 lm 123 lm/W
/2 _ 3000 K  CRI >90 2644 lm 100,15 lm/W
/3 _ 3500 K  CRI >90 4640 lm 132 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,8 Kg.

Sticks 3 m.

7346

Temperature Colour

- /1 _ 2700 K  CRI >90 6519 lm 123 lm/W
/2 _ 3000 K  CRI >90 5288 lm 100,15 lm/W
/3 _ 3500 K  CRI >90 6960 lm 132 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 2,4 Kg.

11 Black

(NCS S 8500-N)


Electrical connection options

Floor base & plug

Surface canopy

Built-in disc S


Remote driver Built-in Micro



Floor base & plug
ACST000001 ACST000002
Driver Constant Voltage 24V.
200~240V. 50/60Hz.
Dimming: Push.

Materials
Body: Steel.
Packaging
1 Box.
0,16 x 0,16 x 0,4 m.
Vol. 0,01 m³.
Gross weight 8,5 Kg.
Net weight 7 Kg.


11 Black
(NCS S 8500-N)



Surface canopy
ACST000003 ACST000004
Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.
Personalisation options available
- Dimming: DALI-2, Casambi.
Min. quantity, upcharge and extra lead
time apply.
To be installed on ceiling or wall.

Materials
Body: Steel.
Packaging
1 Box.
0,50 x 0,25 x 0,25 m.
Vol. 0,03 m³.
Gross weight 2,9 Kg.
Net weight 2,5 Kg.


11 Black
(NCS S 8500-N)



Built-in disc S
ACST000005 ACST000006
Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.
Personalisation options available
- Dimming: DALI-2, Casambi.
Min. quantity, upcharge and extra lead
time apply.
To be installed on ceiling or wall.

Materials
Body: Steel.
Packaging
1 Box.
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)



Remote driver Built-in Micro
ACST000007 ACST000008
Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.
Personalisation options available
- Dimming: DALI-2, Casambi.
Min. quantity, upcharge and extra lead
time apply.
To be installed on ceiling or wall.

Materials
Body: Aluminum.
Packaging
1 Box.
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)




Sticks Solo

Design by Arik Levy

A pure solution for a minimalist interior, Sticks Solo features a range of free-standing, arranged floor to wall, connecting two planes of the same space or horizontal pendant of various lengths and incorporates a range of electrical connection options for seamless integration with the surrounding architecture.

Floor

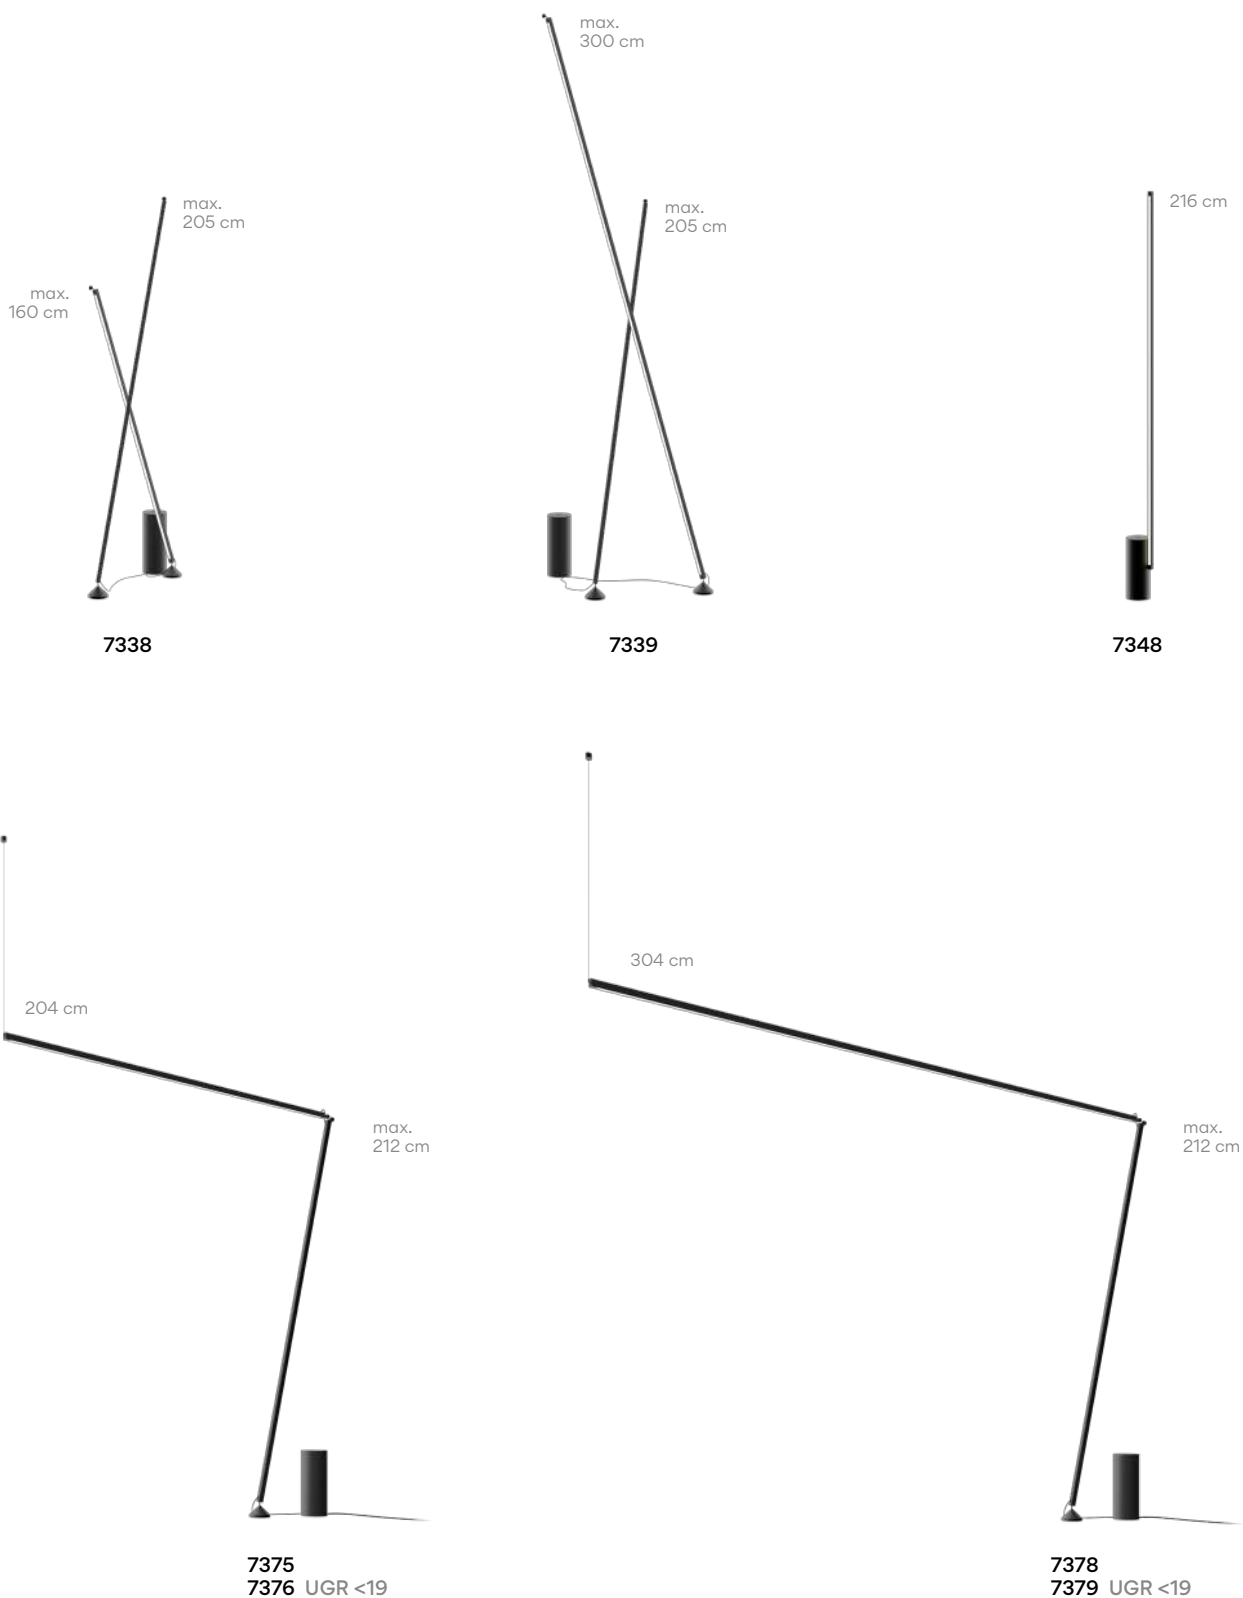

7338

Finishes
● **11/ _ _ Black**
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 7604 lm
/2 _ 3000 K - 8192 lm
/3 _ 3500 K - 8286 lm


CRI >90

Control
7338 11 / _ 5 Push

Materials
Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 26,4 W 24V
1 x LED STRIP 35,2 W 24V
Constant Voltage 24V
200~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0414 m³
Gross weight 14,2 Kg Net weight 9,7 Kg

7339

Finishes
● **11/ _ _ Black**
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 10868 lm
/2 _ 3000 K - 11704 lm
/3 _ 3500 K - 11836 lm


CRI >90

Control
7339 11 / _ 5 Push

Materials
Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 35,2 W 24V
1 x LED STRIP 52,8 W 24V
Constant Voltage 24V
200~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,057 m³
Gross weight 16,6 Kg Net weight 10,6 Kg

7348

Finishes
● **11/ _ _ Black**
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4346 lm
/2 _ 3000 K - 4681 lm
/3 _ 3500 K - 4734 lm


CRI >90

Control
7348 11 / _ 5 Push


Materials
Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 35,2 W 24V
Constant Voltage 24V
200~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0166 m³
Gross weight 8,8 Kg Net weight 8,4 Kg

7375
7376
UGR <19

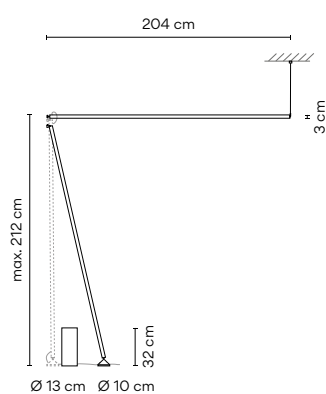

7375

Finishes

- 11/ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 8694 lm
- /2 _ 3000 K - 9363 lm
- /3 _ 3500 K - 9469 lm

F
CRI >90

Control

7375 11 / _ 5 Push

Materials

Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 35,2W 24V
Constant voltage 24V
200~240Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,25
Vol 0,035 m³
1 Tube 0,16 x 0,16 x 0,40
Vol 0,01 m³
Gross weight 13,6 Kg Net weight 9,4 Kg

LED IP20 CE UK ENE Dimmer

7376

Finishes

- 11/ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 8694 lm
- /2 _ 3000 K - 9363 lm
- /3 _ 3500 K - 9469 lm

F
CRI >90

Control

7376 11 / _ 5 Push

Materials

Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics


2 x LED STRIP 35,2W 24V
Constant voltage 24V
200~240Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,25
Vol 0,035 m³
1 Tube 0,16 x 0,16 x 0,40
Vol 0,01 m³
Gross weight 13,6 Kg Net weight 9,4 Kg

LED IP20 CE UK ENE Dimmer

7378
7379
 UGR <19

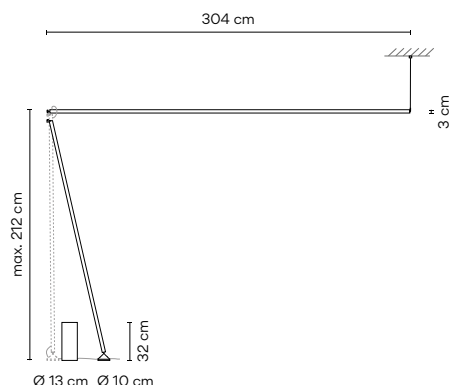

7378

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 10868 lm
 /2 _ 3000 K - 11704 lm
 /3 _ 3500 K - 11836 lm
 F
 CRI >90

Control
 7378 11 / _ 5 Push

Materials

Stick: Aluminium.
 Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED STRIP 35,2W 24V
 1 x LED STRIP 52,8W 24V
 Constant voltage 24V
 200~240Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 3,25
 Vol 0,05 m³
 1 Tube 0,16 x 0,16 x 0,40
 Vol 0,01 m³
 Gross weight 15,7 Kg Net weight 9,4 Kg

LED IP20 CE UK ENEC Dimmer

7379

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 10868 lm
 /2 _ 3000 K - 11704 lm
 /3 _ 3500 K - 11836 lm
 F
 CRI >90

Control
 7379 11 / _ 5 Push

Materials

Stick: Aluminium.
 Diffuser: PC - Polycarbonate.

Light Source and electronics


1 x LED STRIP 35,2W 24V
 1 x LED STRIP 52,8W 24V
 Constant voltage 24V
 200~240Vac 50/60Hz

Packaging


1 Tube 0,12 x 0,12 x 3,25
 Vol 0,05 m³
 1 Tube 0,16 x 0,16 x 0,40
 Vol 0,01 m³
 Gross weight 15,7 Kg Net weight 9,4 Kg

LED IP20 CE UK ENEC Dimmer


Pendant

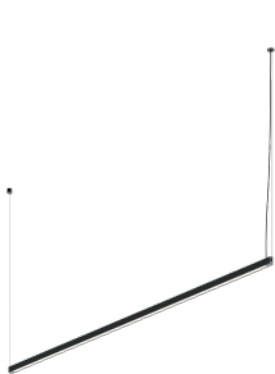


7360
7361 UGR <19
152 x 2 x 3 cm

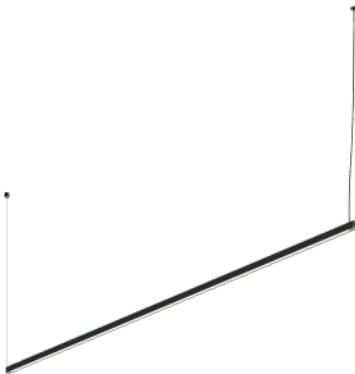

7363
7364 UGR <19
201 x 2 x 3 cm

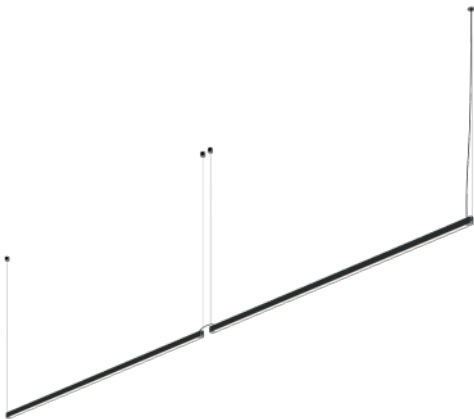


7365
7366 UGR <19
304 x 2 x 3 cm

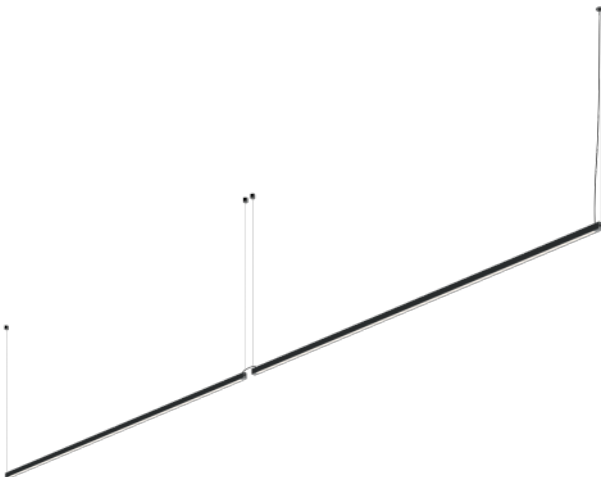

7368
7369 UGR <19
402 x 2 x 3 cm

7360
7361
UGR <19

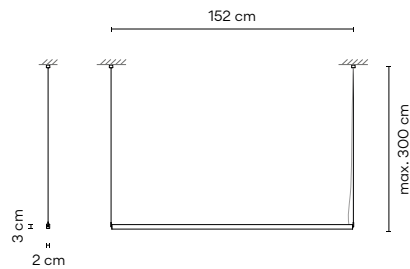

7360

Finishes
● **11/ _ _ Black**
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3260 lm
/2 _ 3000 K - 3511 lm
/3 _ 3500 K - 3551 lm
F →
CRI >90

Control

7360 11 / _ _

_ _ / **1** DALI-2
_ _ / **3** 1-10V
_ _ / **Z** Casambi

⚡ Select Electrical connection



Surface Built-in Disc S Remote Micro Remote XXS

Materials

Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED PLATE 26,4 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging

1 Tube 0,07 x 0,07 x 1,60 m
Vol 0,007 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 4,6 Kg Net weight 3,4 Kg

Notes

7360 _ _ / **1**: DALI-2 **Multi-volt**
7360 _ _ / **3**: 1-10V **Multi-volt**

LED **IP20** **CE** **UK** **ERC** **Dimmer**

7361

Finishes
● **11/ _ _ Black**
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3260 lm
/2 _ 3000 K - 3511 lm
/3 _ 3500 K - 3551 lm
F →
CRI >90

Control

7361 11 / _ _

_ _ / **1** DALI-2
_ _ / **3** 1-10V
_ _ / **Z** Casambi

⚡ Select Electrical connection



Surface Built-in Disc S Remote Micro Remote XXS

Materials

Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED PLATE 26,4 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging


1 Tube 0,07 x 0,07 x 1,60 m
Vol 0,007 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 4,6 Kg Net weight 3,4 Kg

Notes

7361 _ _ / **1**: DALI-2 **Multi-volt**
7361 _ _ / **3**: 1-10V **Multi-volt**

LED **IP20** **CE** **UK** **ERC** **Dimmer**

7363
7364
UGR <19

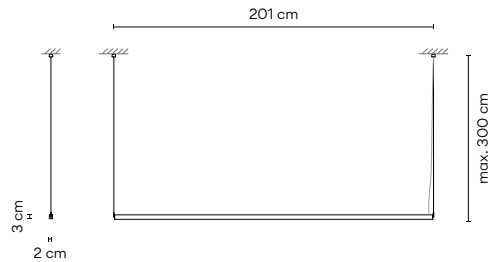

7363

Finishes

11/ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 4347 lm
/2 _ 3000 K - 4682 lm
/3 _ 3500 K - 4734 lm
F >90

Control

7363 11 / _
_ / _ 1 DALI-2
_ / _ 3 1-10V
_ / _ Z Casambi

Select Electrical connection



Surface Built-in Disc S Remote Micro Remote XXS

Materials

Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED PLATE 35,2 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging

1 Tube 0,07 x 0,07 x 2,240 m
Vol 0,011 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 5,3 Kg Net weight 3,7 Kg

Notes

7363 _ / _ 1: DALI-2 Multi-volt
7363 _ / _ 3: 1-10V Multi-volt

LED IP20 CE UK ENEC Dimmer

7364

Finishes

11/ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 4347 lm
/2 _ 3000 K - 4682 lm
/3 _ 3500 K - 4734 lm
F >90

Control

7364 11 / _
_ / _ 1 DALI-2
_ / _ 3 1-10V
_ / _ Z Casambi

Select Electrical connection



Surface Built-in Disc S Remote Micro Remote XXS

Materials

Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED PLATE 35,2 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging


1 Tube 0,07 x 0,07 x 2,240 m
Vol 0,011 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 5,3 Kg Net weight 3,7 Kg

Notes

7364 _ / _ 1: DALI-2 Multi-volt
7364 _ / _ 3: 1-10V Multi-volt

LED IP20 CE UK ENEC Dimmer

7365
7366
 UGR <19

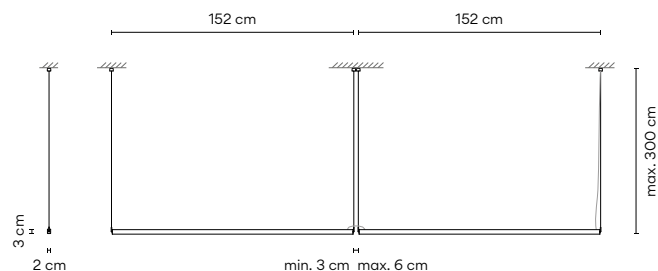

7365

Finishes	LED Colour Temperature	Control
● 11/ _ Black (NCS S 8500-N)	/1 _ 2700 K - 6521 lm /2 _ 3000 K - 7022 lm /3 _ 3500 K - 7102 lm F >	7365 11 / _ _ / _ 1 DALI-2 _ / _ 3 1-10V _ / _ Z Casambi
	CRI >90	

Select Electrical connection



Surface	Built-in Disc S	Remote Micro	Remote XXS
---------	--------------------	-----------------	---------------

Materials

Stick: Aluminium.
 Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 26,4 W 24V
 Constant voltage 24V
 90~305Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,070 m
 Vol 0,032 m³
 1 Box 0,12 x 0,12 x 0,48 m
 Vol 0,007 m³
 Gross weight 7,9 Kg Net weight 4,3 Kg

Notes

7365 _ / _ 1: DALI-2 Multi-volt
 7365 _ / _ 3: 1-10V Multi-volt

LED IP20 CE UK ENEC Dimmer

7366

Finishes	LED Colour Temperature	Control
● 11/ _ Black (NCS S 8500-N)	/1 _ 2700 K - 6521 lm /2 _ 3000 K - 7022 lm /3 _ 3500 K - 7102 lm F >	7366 11 / _ _ / _ 1 DALI-2 _ / _ 3 1-10V _ / _ Z Casambi
	CRI >90	

Select Electrical connection



Surface	Built-in Disc S	Remote Micro	Remote XXS
---------	--------------------	-----------------	---------------

Materials

Stick: Aluminium.
 Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 26,4 W 24V
 Constant voltage 24V
 90~305Vac 50/60Hz

Packaging


1 Tube 0,12 x 0,12 x 2,070 m
 Vol 0,032 m³
 1 Box 0,12 x 0,12 x 0,48 m
 Vol 0,007 m³
 Gross weight 7,9 Kg Net weight 4,3 Kg

Notes

7366 _ / _ 1: DALI-2 Multi-volt
 7366 _ / _ 3: 1-10V Multi-volt

LED IP20 CE UK ENEC Dimmer

7368
7369
UGR <19

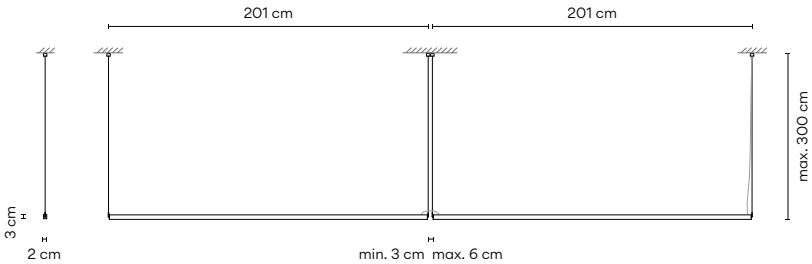

7368

Finishes

- 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 8694 lm
- /2 _ 3000 K - 9363 lm
- /3 _ 3500 K - 9469 lm

F

CRI >90

Control

7368 11 / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ 3 1-10V
- _ _ / _ Z Casambi

Select Electrical connection



Surface

Built-in
Disc S

Remote
Micro

Remote
XXS

Materials

Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 35,2 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,25 m
Vol 0,035 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 8,7 Kg Net weight 4,9 Kg

Notes

7368 _ _ / _ 3: 1-10V Multi-volt

LED IP20 CE UK ENEC Dimmer

7369

Finishes

- 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 8694 lm
- /2 _ 3000 K - 9363 lm
- /3 _ 3500 K - 9469 lm

F

CRI >90

Control

7369 11 / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ 3 1-10V
- _ _ / _ Z Casambi

Select Electrical connection



Surface

Built-in
Disc S

Remote
Micro

Remote
XXS

Materials

Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 35,2 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,25 m
Vol 0,035 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 8,7 Kg Net weight 4,9 Kg

Notes

7369 _ _ / _ 3: 1-10V Multi-volt

LED IP20 CE UK ENEC Dimmer

⚡ Select Eletrical connection

For Ref. 7360, 7361, 7363, 7364, 7365, 7366, 7368, 7369

Drop ceiling

Regular ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

Ø 6 cm
height 6 cm

for all types
of drop
ceilings.
Black finish.

Ø 8 cm
height 6 cm

Black finish.

28 x 10 x 4 cm

Ref. 3768, 3769

40 x 10 x 4 cm

Black finish.

Remote

Built-in



Musa

Design by Note Design Studio

Delicate elegance.
It explores the delicacy of nature
which is both strong and powerful,
in a poetic expression of light.

Table Wall



7400
9 x Ø 26 cm



7402
Ø 26 x 14 x 10 cm



7404
Ø 26 x 14 x 10 cm



7415
Ø 26 x 10 cm

Portable

7400

Finishes

- 23/ _ _ Warm White
(NCS S 0502-Y50R)
- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 36/ _ _ Soft Pink
(NCS S 1010-Y50R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 449 lm

F

CRI >90

Control

7400 _ _ / 15 Push
(with or without memory)

Materials

Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m³
Gross weight 1,3 Kg Net weight 0,85 Kg

Notes

Electric cable with plug 3m.
Push-button on the base.

LED IP20 CE UK ENEC Dimmer Multi-volt



7402

Finishes 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 36/ _ _ Soft Pink (NCS S 1010-Y50R) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 449 lm CRI >90	Control 7402 _ _ / 15 Push (with or without memory)
Materials Diffuser: Blown glass. Body: Aluminum. Light Source and electronics 1 x LED 4,5 W 350 mA Constant Voltage 24V 100~240V 50/60Hz	Packaging 1 Box 0,17 x 0,32 x 0,3 m Vol 0,0163 m³ Gross weight 1,3 Kg Net weight 0,85 Kg Notes Electric cable with plug 3m. Push-button on the base.	LED IP20 CE UK ER Dimmer Multi-volt

7404

Finishes 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 36/ _ _ Soft Pink (NCS S 1010-Y50R) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 157 lm CRI >90	Control 7404 _ _ / 15 Push (with or without memory)
Materials Diffuser: Blown glass. Body: Aluminum. Light Source and electronics 1 x LED 1,5 W 500 mA Constant Voltage 5V 100~240V 50/60Hz	Packaging 1 Box 0,17 x 0,32 x 0,3 m Vol 0,0163 m³ Gross weight 1,4 Kg Net weight 0,95 Kg Notes Portable version with battery. Dimmer switch on the base. 3 step dimming. Electric cable with plug. 3 m. Push-button on the base. Battery life: from 6 to 18 hours (dependent on intensity).	LED IP20 CE UK ER Multi-volt Li-ion

7415

Finishes 23/ _ _ Warm White (NCS S 0502-Y50R) 24/ _ _ Beige M1 (NCS S 2005-Y50R) 36/ _ _ Soft Pink (NCS S 1010-Y50R) Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)	LED Colour Temperature /1 _ 2700 K - 449 lm CRI >90	Control 7415 _ _ / 13 1-10V
Materials Diffuser: Blown glass. Body: Aluminum. Light Source and electronics 1 x LED 4,5 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Packaging 1 Box 0,17 x 0,32 x 0,3 m Vol 0,0163 m³ Gross weight 1,8 Kg Net weight 1,3 Kg	LED IP20 CE UK ER

Knit

Design by Meike Harde

Form, materiality and tangibility collide with the Knit collection. Its texture is magnetic, calling out for us to touch its surface, to feel its warmth and to keep it close. Light seeps outwards through the fabric and downwards through a translucent screen, softening its luminosity.


Pendant

7450




Ø 45 cm

7455



Ø 45 cm

7460



Ø 45 cm

7470



Ø 65 cm

7475



Ø 65 cm

7450

Finishes

● 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 4740 lm



CRI >90

Control

7450 _ _ / _ _

_ _ / _ 1 DALI-2

_ _ / _ 3 1-10V

_ _ / _ Z Casambi



⚡ Select Electrical connection




Surface



Free Wire



Built-in XS



Remote
Micro



Remote
XXS

Materials

Fabric shade: PES FR.

Interior diffuser: PE- Polyethylene.

Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics

6 x LED 5,9W 350 mA

Constant Current 1050 mA

110-240V 50/60Hz

Packaging

1 Box 0,55 x 0,55 x 0,65 m

Vol 0,196 m³

Gross weight 6 Kg Net weight 3,7 Kg

Notes

7450 _ _ / _ 1: DALI-2 **Bi-volt**

Extra cable length.

LED **IP20** **CE** **UK** **ERC**

7455

Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1_ 2700 K - 4740 lm
E
CRI >90

Control
7455 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi



Select Electrical connection



Surface



Free Wire



Built-in XS



Remote
Micro



Remote
XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Current 1050 mA
110-240V 50/60Hz

Packaging
1 Box 0,54 x 0,54 x 0,41 m
Vol 0,119 m³
Gross weight 5,9 Kg Net weight 3,2 Kg

Notes
7455 _ _ / _ 1: DALI-2 **Bi-volt**
Extra cable length.

LED ☐ IP20

7460

Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1_ 2700 K - 4740 lm
E
CRI >90

Control
7460 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi



Select Electrical connection




Surface



Free Wire



Built-in XS



Remote
Micro



Remote
XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Current 1050 mA
110-240V 50/60Hz


Packaging
1 Box 0,54 x 0,54 x 0,41 m
Vol 0,119 m³
Gross weight 5,2 Kg Net weight 3,4 Kg

Notes
7460 _ _ / _ 1: DALI-2 **Bi-volt**
Extra cable length.

LED ☐ IP20

7470	Finishes ● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature /1 _ 2700 K - 4740 lm IE CRI >90	Control 7470 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
------	---	---	---


Select Electrical connection

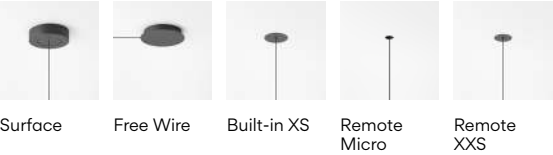

Materials Fabric shade: PES FR. Interior diffuser: PE- Polyethylene. Diffuser: PMMA. Diffuser ring: ABS. Light Source and electronics 6 x LED 6,7W 400 mA Constant Current 1200 mA 110~240V 50/60Hz	Packaging 1 Box 0,59 x 0,78 x 0,78m Vol 0,358 m³ Gross weight 9 Kg Net weight 5,5 Kg Notes 7470 _ _ / _ 1: DALI-2 Bi-volt Extra cable length. LED IP20 CE UK ErC
---	--

7475	Finishes ● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature /1 _ 2700 K - 4740 lm IE CRI >90	Control 7475 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
------	---	---	---

Select Electrical connection

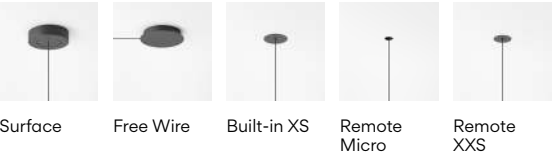


Materials Fabric shade: PES FR. Interior diffuser: PE- Polyethylene. Diffuser: PMMA. Diffuser ring: ABS. Light Source and electronics 6 x LED 6,7W 400 mA Constant Current 1200 mA 110~240V 50/60Hz	Packaging 1 Box 0,80 x 0,80 x 0,77m Vol 0,492 m³ Gross weight 9,5 Kg Net weight 6 Kg Notes 7475 _ _ / _ 1: DALI-2 Bi-volt Extra cable length. LED IP20 CE UK ErC
---	--

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 7450, 7455, 7460, 7470, 7475

Drop ceiling



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling



Ø 16 cm

match with fixture finish.



Ø 22 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.



Ø 36 cm



Ø 40 cm

Remote

Built-in



Floor



7480
Ø 45 x 178 cm

7485
Ø 45 x 170 cm

7487
Ø 65 x 195 cm



7490
Ø 45 x 55 cm

7492
Ø 65 x 51 cm

7494
Ø 65 x 62 cm

7480	Finishes 24/ _ _ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature /1 _ 2700 K - 4740 lm E CRI >90	Control 7480 _ _ / _ _ _ _ / _ 5 Push _ _ / _ Z Casambi
	Materials Fabric shade: PES FR. Interior diffuser: PE- Polyethylene. Botom diffuser: PMMA. Diffuser ring and support: ABS. Stem: Iron. Floor base: Zinc Alloy. Light Source and electronics 6 x LED 5,9W 350 mA Constant Voltage 42V 1,43mA 110~240V 50/60Hz	Packaging 2 Boxes Box 1: 0,54 x 0,54 x 0,41 m Box 2: 1,71 x 0,38 x 0,36 m Total Vol. 0,4311 m³ Gross weight 21,9 Kg Net weight 11,3 Kg Notes 7480 _ _ / _ 5: Push Bi-volt Electric cable 2,5 m. LED IP20 CE UK EAC	

7485	Finishes 24/ _ _ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature /1 _ 2700 K - 4740 lm E CRI >90	Control 7485 _ _ / _ _ _ _ / _ 5 Push _ _ / _ Z Casambi
	Materials Fabric shade: PES FR. Interior diffuser: PE- Polyethylene. Botom diffuser: PMMA. Diffuser ring and support: ABS. Stem: Iron. Floor base: Zinc Alloy. Light Source and electronics 6 x LED 5,9W 350 mA Constant Voltage 42V 1,43mA 110~240V 50/60Hz	Packaging 2 Boxes Box 1: 0,54 x 0,54 x 0,41 m Box 2: 1,71 x 0,38x 0,36 m Total Vol. 0,353 m³ Gross weight 21,5 Kg Net weight 10,8 Kg Notes 7485 _ _ / _ 5: Push Bi-volt Electric cable 2,5 m. LED IP20 CE UK EAC	

7487	Finishes 24/ _ _ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature /1 _ 2700 K - 4740 lm E CRI >90	Control 7487 _ _ / _ _ _ _ / _ 5 Push _ _ / _ Z Casambi
	Materials Fabric shade: PES FR. Interior diffuser: PE- Polyethylene. Botom diffuser: PMMA. Diffuser ring and support: ABS. Stem: Iron. Floor base: Zinc Alloy. Light Source and electronics 6 x LED 5,9W 350 mA Constant Voltage 42V 1,43 mA 110~240V 50/60Hz	Packaging 2 Boxes Box 1: 0,78 x 0,78 x 0,59 m Box 2: 1,93 x 0,45 x 0,46 m Total Vol. 0,7649 m³ Gross weight 30 Kg Net weight 18,5 Kg Notes 7487 _ _ / _ 5: Push Bi-volt Electric cable 2,5 m. LED IP20 CE UK EAC	

7490	Finishes	LED Colour Temperature	Control
	24/ _ _ Beige M1 (NCS S 2005-Y50R)	/1 _ 2700 K - 4740 lm E	7490 _ _ / _ _ _ _ / _ 5 Push _ _ / _ Z Casambi
	CRI >90		
7492	Materials	Packaging	
	Fabric shade: PES FR. Interior diffuser: PE- Polyethylene. Botom diffuser: PMMA. Diffuser ring and support: ABS.	1 Box 0,65 x 0,55 x 0,55 m Vol 0,196 m³ Gross Weight 5,4 Kg Net Weight 3,3 Kg	
	Light Source and electronics	Notes	
7494	6 x LED 5,9 W 350 mA Constant Voltage 42V 1,43 mA 110~240V 50/60Hz	7490 _ _ / _ 5: Push Bi-volt Push on the top of the luminaire. Electric cable 2,5 m LED IP20 CE UK ENE	
	Finishes	LED Colour Temperature	Control
	24/ _ _ Beige M1 (NCS S 2005-Y50R)	/1 _ 2700 K - 4740 lm E	7492 _ _ / _ _ _ _ / _ 5 Push _ _ / _ Z Casambi
7492	CRI >90		
	Materials	Packaging	
	Fabric shade: PES FR. Interior diffuser: PE- Polyethylene. Botom diffuser: PMMA. Diffuser ring and support: ABS.	1 Box 0,78 x 0,78 x 0,59 m Vol 0,358 m³ Gross Weight 7,3 Kg Net Weight 4,5 Kg	
7494	Light Source and electronics	Notes	
	6 x LED 5,9 W 350 mA Constant Voltage 42V 1,43 mA 110~240V 50/60Hz	7492 _ _ / _ 5: Push Bi-volt Push on the top of the luminaire. Electric cable 2,5 m LED IP20 CE UK ENE	
	Finishes	LED Colour Temperature	Control
	24/ _ _ Beige M1 (NCS S 2005-Y50R)	/1 _ 2700 K - 4740 lm E	7494 _ _ / _ _ _ _ / _ 5 Push _ _ / _ Z Casambi
7494	CRI >90		
	Materials	Packaging	
	Fabric shade: PES FR. Interior diffuser: PE- Polyethylene. Botom diffuser: PMMA. Diffuser ring and support: ABS.	1 Box 0,80 x 0,80 x 0,75 m Vol 0,48 m³ Gross Weight 9,3 Kg Net Weight 5,9 Kg	
7494	Light Source and electronics	Notes	
	6 x LED 5,9 W 350 mA Constant Voltage 42V 1,43 mA 110~240V 50/60Hz	7494 _ _ / _ 5: Push Bi-volt Push on the top of the luminaire. Electric cable 2,5 m. LED IP20 CE UK ENE	




Set

Design by Xuclà

Set is a new concept of modular wall sconces that composes light as art onto the walls. During the day Set decorates the wall with a pattern of rectangular elements, but once illuminated it creates a surprising play of lights, shadows and volumes.

Wall

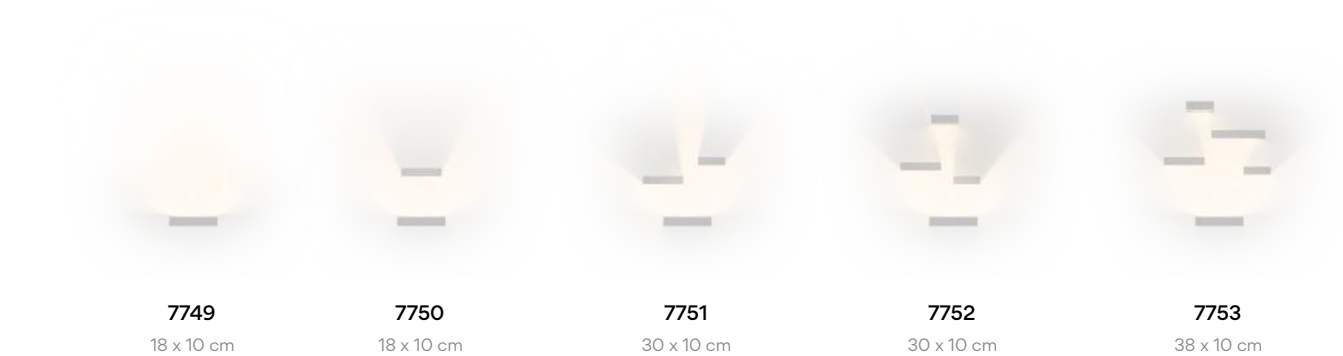

7749

- Finishes**
- 25/ _ _ Beige D1 (NCS S 4005-Y50R)
 - 93/ _ _ White (RAL 9003)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D

/3 _ 3500 K - 1374,9 lm
G

CRI >90

Control

7749 _ _ / _ 2 0-10V

Materials

Main body: Aluminum.
Diffuser: Borosilicate glass.
Lid: PC- Polycarbonate.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,67 Kg Net weight 0,52 Kg

LED IP20 CE UK ENE Multi-volt

7750

- Finishes**
- 25/ _ _ Beige D1 (NCS S 4005-Y50R)
 - 93/ _ _ White (RAL 9003)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D

/3 _ 3500 K - 1374,9 lm
G

CRI >90

Control

7750 _ _ / _ 2 0-10V

Materials

Main body: Aluminum.
Diffuser: Borosilicate glass.
Reflecting bodies: PVC.
Lid: PC- Polycarbonate.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 0,95 Kg Net weight 0,8 Kg

Notes

LED placed on the lower element.

LED IP20 CE UK ENE Multi-volt

7751

Finishes
 ● **25/** _ _ Beige D1
 (NCS S 4005-Y50R)
 ● **93/** _ _ White
 (RAL 9003)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
D
/3 _ 3500 K - 1374,9 lm
G
 CRI >90

Control
7751 _ _ / _ **2** 0-10V

Materials
 Main body: Aluminum.
 Diffuser: Borosilicate glass.
 Reflecting bodies: PVC.
 Lid: PC- Polycarbonate.
Light Source and electronics
 1 x LED 9 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging
 1 Box 0,15 x 0,132 x 0,36 m
 Vol 0,0071 m³
 Gross weight 1,25 Kg Net weight 1,1 Kg

Notes
 LED placed on the lower element.

LED IP20 CE UK ENEC Multi-volt

7752

Finishes
 ● **25/** _ _ Beige D1
 (NCS S 4005-Y50R)
 ● **93/** _ _ White
 (RAL 9003)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
D
/3 _ 3500 K - 1374,9 lm
G
 CRI >90

Control
7752 _ _ / _ **2** 0-10V

Materials
 Main body: Aluminum.
 Diffuser: Borosilicate glass.
 Reflecting bodies: PVC.
 Lid: PC- Polycarbonate.
Light Source and electronics
 1 x LED 9 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging
 1 Box 0,15 x 0,132 x 0,36 m
 Vol 0,0071 m³
 Gross weight 1,6 Kg Net weight 1,4 Kg

Notes
 LED placed on the lower element.

LED IP20 CE UK ENEC Multi-volt

7753

Finishes
 ● **25/** _ _ Beige D1
 (NCS S 4005-Y50R)
 ● **93/** _ _ White
 (RAL 9003)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
D
/3 _ 3500 K - 1374,9 lm
G
 CRI >90

Control
7753 _ _ / _ **2** 0-10V

Materials
 Main body: Aluminum.
 Diffuser: Borosilicate glass.
 Reflecting bodies: PVC.
 Lid: PC- Polycarbonate.
Light Source and electronics
 1 x LED 9 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging
 1 Box 0,15 x 0,193 x 0,36 m
 Vol 0,0100 m³
 Gross weight 2 Kg Net weight 1,5 Kg

Notes
 LED placed on the lower element.

LED IP20 CE UK ENEC Multi-volt

Alpha

Design by Ramos & Bassols

A wall lamp with basic lines and advanced lighting performance, its diffuser emits a warm, comfortable light.

Wall




7940
12 x 12 cm



Without switch

7942
12 x 12 cm

7940	Finishes ● 18/ _ _ Graphite & Black (RAL 7016 & RAL 9005) ● 93/ _ _ White (RAL 9016)	LED Colour Temperature /1 _ 2700 K - 181,22 lm D /3 _ 3500 K - 163,20 lm G CRI >90	Control 7940 _ _ / _ 0 On/ Off
	Materials Diffuser: PC- Polycarbonate. Lid: Zinc Alloy. Body: Aluminum. Lid: Aluminum. Light Source and electronics 1 x LED 2,1 W 700 mA Constant Current 700 mA 100~240V 50/60Hz	Packaging 1 Box 0,13 x 0,20 x 0,20 m Vol 0,0055 m³ Gross weight 1,2 Kg Net weight 1 Kg Notes Surface On/ Off switch on the front cover	

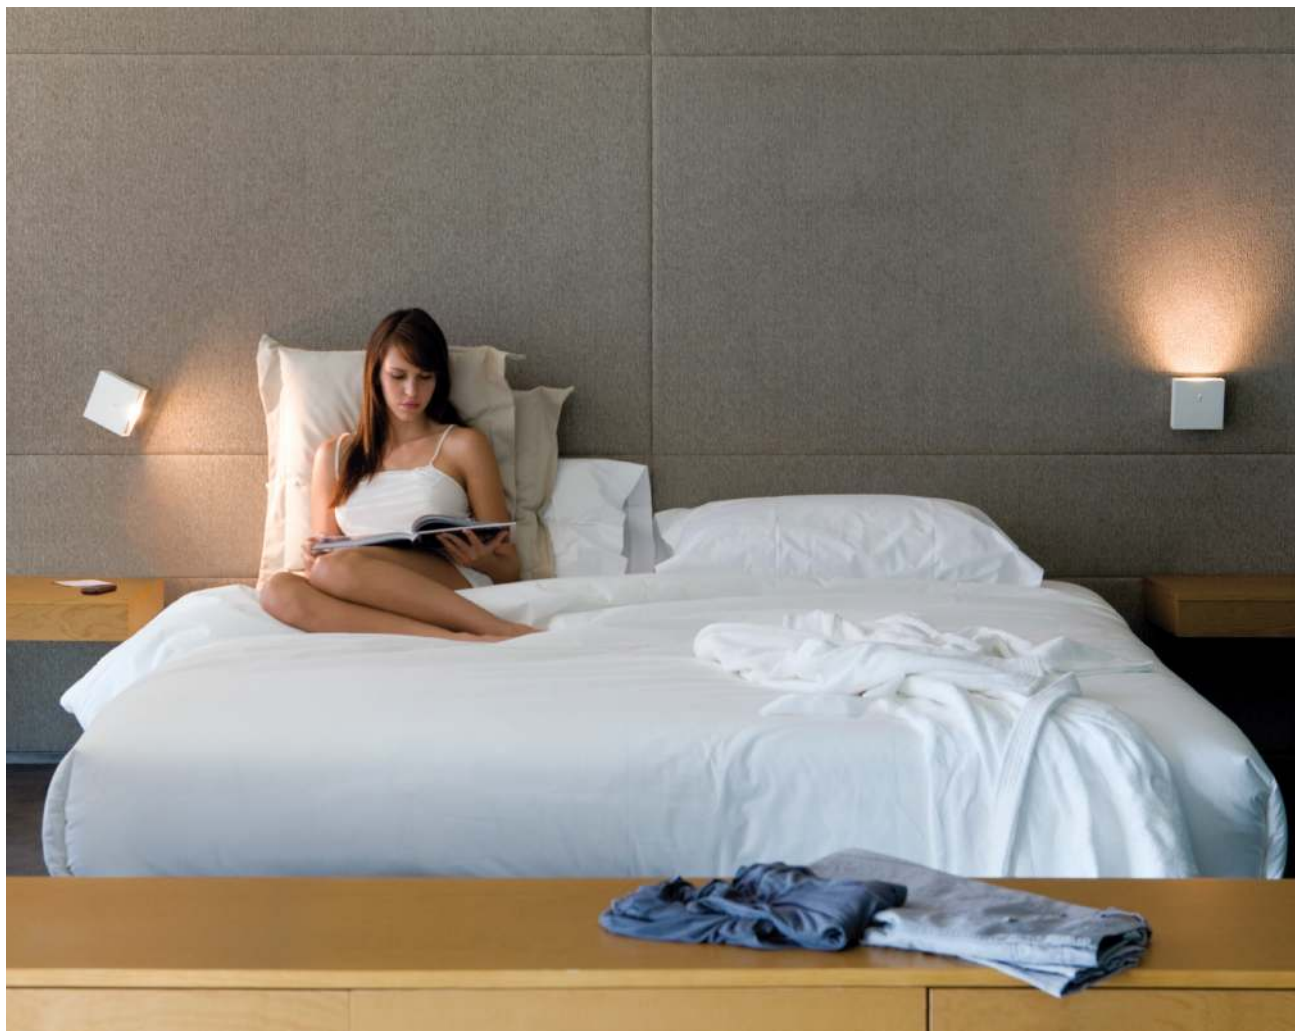

7942

- Finishes
- 18/ _ _ Graphite & Black (RAL 7016 & RAL 9005)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 181,22 lm
D

/3 _ 3500 K - 163,20 lm
G

CRI >90

Control

7942 _ _ / _ 0 On/ Off

Materials

Diffuser: PC- Polycarbonate.
Lid: Zinc Alloy.
Body: Aluminum.
Lid: Aluminum.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,20 m
Vol 0,0055 m³
Gross weight 1,2 Kg Net weight 1 Kg

Notes




Surface
Without switch

LED IP20 CE ENEC ENEC Bi-volt

Match

Design by Jordi Vilardell & Meritxell Vidal

Based on the principle of co-creation, Match is a lighting collection that can be fully customised virtually. Characterised by unlimited configurations, Match's kinetic clusters exude a textured, sculptural presence.

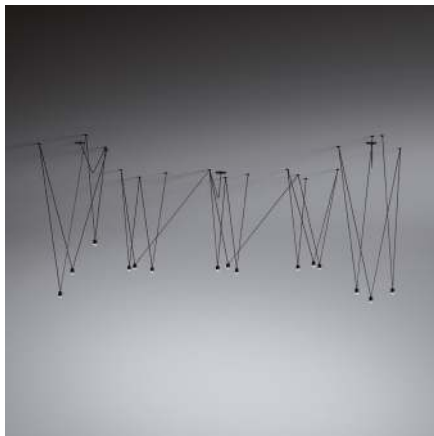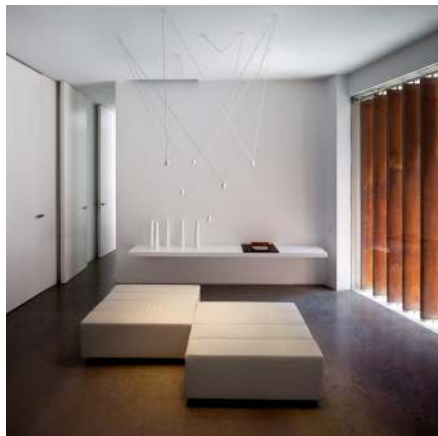

Built-in installation

- Electrical connection finials: the minimum height is 10 cm and the dimension of the cut-out is 10,5 cm.
- Nodes: the minimum height is 12 cm and the dimension of the cut-out is 4,5 cm.

Each project is unique.
Visit vibia.com and
chose among multiple
compositions designed
and adapted to your
project needs.


Personalise your own
Match composition
quick and easy at
vibia.com

**It's necessary
to make your
personalized
configuration
on vibia.com to
see prices and
place orders.**


Example 1:




Example 2:




Example 3:




Example 4:



Example 5:



Example 6:



Finishes
● **03/** _ _ White
(RAL 9010)
● **18/** _ _ Graphite
(RAL 7016)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
[G]
CRI >90
/2 _ 3000 K - 1269 lm
[D]
CRI >80
/3 _ 3500 K - 1446 lm
[G]
CRI >90

Control

_ _ / A Push; 1-10V- DALI-2
_ _ / Z Casambi

Materials
Head: Aluminum.
Canopy: Steel.
Rods: Steel.

Light Source and electronics
LED 2,1 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Notes

Built-in

LED [G] IP20 CE ENEC EAC [Bi-volt]

Ø 4,5 cm Ø 10,5 cm

PLACE ORDER ONLINE AT WWW.VIBIA.COM



Light source

Luminaire data

The information published in this technical catalog (lumens & watts) refers to the light source. Check luminaire data in the downloadable spec sheet at **vibia.com**

LED retrofit			
900018.	LED G9 4,2W 2700K 470 lm.		Puck and Warm
900102.	LED E27 230V 12W LED 2700 K 1520 lm		Balance and Warm

Bulbs: net prices, without discount

Glossary

CE

Product fulfills the requirements of the relevant European directives.

UK

Product fulfills the requirements of Great Britain relevant legislation.

EU

Product complying with TP TC 004/2011 and TP TC 020/2011. Custom Union Regulation

⚡

Product that complies with the law N24-09 of the current Moroccan legislation.

IP

Level of protection. Electrical products are prepared to avoid solids and liquids from getting in contact with the electrical parts. Such resistance is expressed as IP followed by two digits: the first digit indicates the level of resistance to solid objects and the second one to liquids. The scale goes from IP20 to IP69.

IP20

Product protected against solid object as big as or bigger than 12 mm. No protection against water.

↑ IP20 ↓ IP40

Product protected against solid objects as big as or bigger than 12 mm in the built-in part. In the visible part of the luminaire, product protected against solid objects as big as or bigger than 1 mm. No protection against water.

IP64

Dust-tight product. Protected against water spray.

IP65

Dust-tight product. Protected against water trickles.

IP66

Dust-tight product. Protected against water spurts.

Insulation class

⊕

Class I. Product with an additional protection cable (grounds).

□

Class II. Product protected against electric shock having a double insulation. No grounds.

⚡

Class III. Product protected against electric shock based on a very-low voltage system. No grounds.

Bi-volt

Valid for the range 110V-230V, 50-60Hz.

Multi-volt

Valid for the range 110-277V, 50-60Hz.

Cut out



Property for embedding dimension.

Integrated Dimmer

Dimmer

Lamp that has a integrated dimmer.

EU Energetic label

More Efficacy

A

B

C

D

E

F

G

Less Efficacy

Light source information

CRI

Colour rendering index.

K

LED Colour Temperature.

lm


Lumen, unit of measurement of luminous flux.

lm/W


Light source performance. Relationship between the luminous flux (lm) and the power consumed (W) by the source.

Lighting control systems


1 Push control

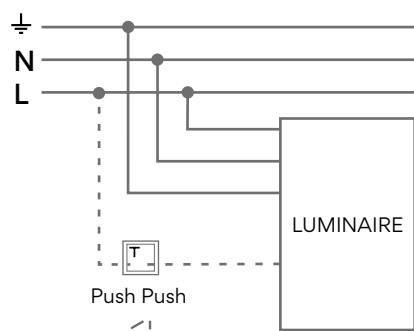


2 1-10V System control

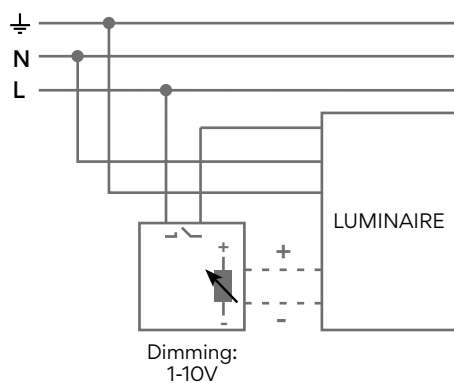


3 DALI System control

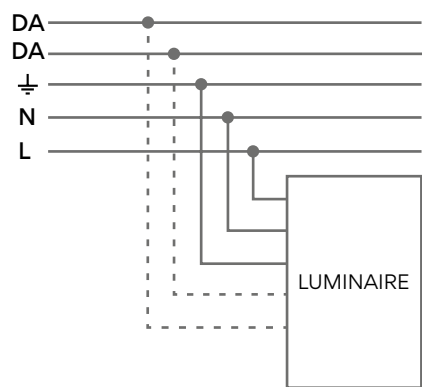


4 Casambi control

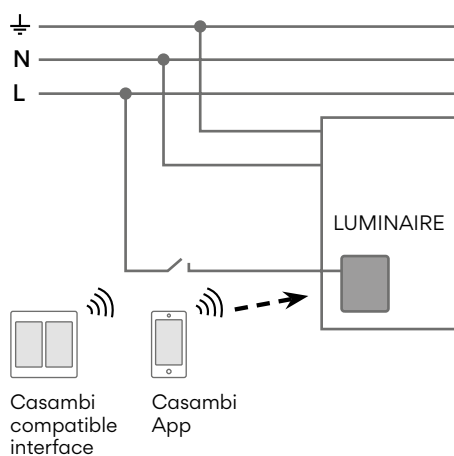

5 ProtoPixel control

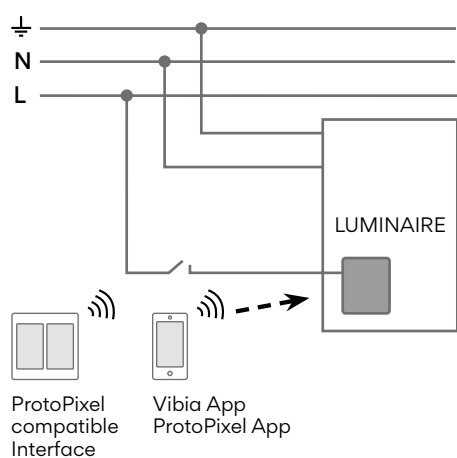

6 TRIAC control

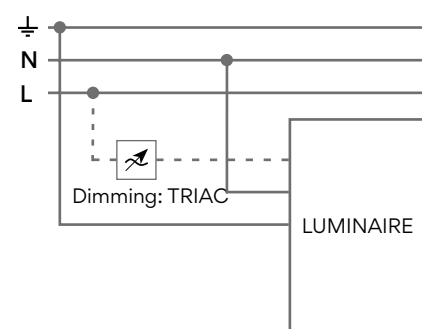

⏏	Ground	L	Line
N	Neutral	DA	DALI-Digital Signal





VIBIA

Recommended sales prices - VAT
not included in this price list updates
models and finishes in production,
which may differ from photographs
published in catalogue.





Index

Alba

22

Asia

16

Closer

10

Nexum

24

Pro

54

Plusminus Essentials

70

Glossary

92

Lighting control
systems


93

Item coding

Some pendant models offer different electrical connection typology, these will require additional coding.

Reference

1160 10 / 1A_18

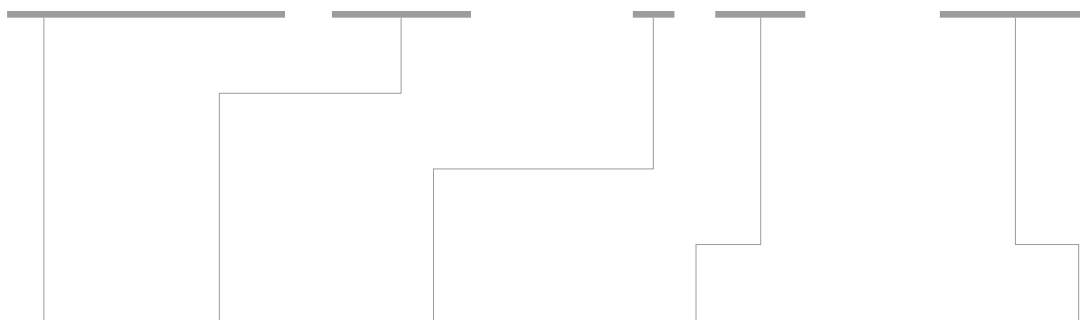

Model

Finish

LED Colour Temperature

Control

Electrical connection

4 digits

2 digits

1 digit

1 digit

2 digits

Type

Model

- 0 Without LED
- 1 2700 K
- 2 3000 K
- 3 3500 K
- 4 4000 K
- 7 2200 K
- 8 Tunable White
- 9 Tunable Red
- A Infinite Colour (TW + RGB)
- F Dim-To-Warm

0	On/ Off	1
1	DALI-2	2
2	0-10V	3
3	1-10V	4
4	TRIAC	T
5	Push	
6	Sensor	
7	Lutron	
8	Push 2	
A	Push; 1-10V; DALI-2	
B	Push; 1-10V	
C	1-10V; DALI-2	
D	Push; DALI-2	
E	Casambi PTP; On/ Off	
F	Simultaneous line Push 1-10V; DALI-2; Casambi	
G	DALI; Casambi; ProtoPixel	
H	On/ Off; DALI-2; Casambi	
M	Without driver	
W	Wiz	
Y	ProtoPixel	
Z	Casambi *	

- 1 Surface
- 2 Built-in
- 3 Remote
- 4 Bolt-down
- T Track

- 0 Basic
- 1 Micro
- 2 XXS
- 3 XS
- 4 S
- 5 M
- 6 L
- 8 Free Wire
- 9 Mud kit
- A Trim
- B Trimless
- X Track Surface
- Z Track Trimless

* Casambi refers to wireless dimming solutions.
Ask for more information.



Closer

Design by Ichiro Iwasaki

A versatile and airy luminaire that transforms outdoor spaces into inviting retreats while blending seamlessly into interiors. Its inner light gently washes the knitted shade, revealing a warm translucent texture that enhances everyday moments.

Outdoor - Pendant

Height: max. 200 cm



Total height
106 cm / 150 cm



Outdoor - Floor & Table



1700


- Finishes**
- 25/ _ _ Beige D1
(NCS S 4005-Y50R)
 - 37/ _ _ Terra Red
(NCS S 4040-Y70R)
 - 56/ _ _ Green D1
(NCS S 7010-G30Y)

LED Colour Temperature
/1 _ 2700 K - 2600 lm
F
CRI >90

Control
1700 _ _ / _ _
_ _ / 11 DALI-2
_ _ / 15 Push
_ _ / 1Z Casambi



Select Electrical connection



Surface Built-in XS Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials
Body: Aluminium. Shade: Polyester.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics
1 x LED PLATE 26W 600mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 0,78 x 0,78 x 0,58 m
Vol 0,3508 m³
Gross weight 5,9 Kg Net weight 2,19 Kg

Notes
1700 _ _ / 1 _ 23: Built-in XS **IP20**
1700 _ _ / 1 _ 31: Remote Micro **IP20**
Extra cable length.

LED IP44

1702

- Finishes**
- 25/ _ _ Beige D1
(NCS S 4005-Y50R)
 - 37/ _ _ Terra Red
(NCS S 4040-Y70R)
 - 56/ _ _ Green D1
(NCS S 7010-G30Y)

LED Colour Temperature
/1 _ 2700 K - 2600 lm
F
CRI >90

Control
1702 _ _ / _ _
_ _ / 11 DALI-2
_ _ / 15 Push
_ _ / 1Z Casambi



Select Electrical connection



Surface Built-in XS Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials
Body: Aluminium. Shade: Polyester.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics
1 x LED PLATE 26W 600mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 0,66 x 0,66 x 0,61 m
Vol 0,2665 m³
Gross weight 5,1 Kg Net weight 2 Kg

Notes
1702 _ _ / 1 _ 23: Built-in XS **IP20**
1702 _ _ / 1 _ 31: Remote Micro **IP20**
Extra cable length.

LED IP44

1704

25/ _ _ Beige D1
(NCS S 4005-Y50R)

37/ _ _ Terra Red
(NCS S 4040-Y70R)

56/ _ _ Green D1
(NCS S 7010-G30Y)

LED Colour Temperature

/1 _ 2700 K - 2600 lm

F

CRI >90

Control

1704 _ _ / _ _

_ _ / 11 DALI-2

_ _ / 15 Push

_ _ / 12 Casambi

Select Electrical connection



Surface



Built-in XS



Remote Micro

_10 Surface

_23 Built-in XS

_31 Remote Micro

Materials

Body: Aluminium. Shade: Polyester.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics

1 x LED PLATE 26W 600mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 1,02 x 0,53 x 0,60 m
Vol 0,3217 m³
Gross weight 5,8 Kg Net weight 2,18 Kg

Notes

1704 _ _ / 1 _ 23: Built-in XS

IP20

1704 _ _ / 1 _ 31: Remote Micro

IP20

Extra cable length.

LED

IP44

CE

UK

EAC

Select Electrical connection

Choose your preferred installation option according to your needs.

Drop ceiling

Regular ceiling

Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

Ø 8 cm
height 6 cm

Black finish.

Ø 18 cm
height 8 cm

Black finish.

Remote

Built-in

12 Product specifications subject to change without notice. Please check vibia.com for updated information.

1705


Finishes ● 25/ _ _ Beige D1 (NCS S 4005-Y50R) ● 37/ _ _ Terra Red (NCS S 4040-Y70R) ● 56/ _ _ Green D1 (NCS S 7010-G30Y)	LED Colour Temperature /1 _ 2700 K - 2600 lm  CRI >90	Control 1705 _ _ / _ _ _ _ / 11 DALI-2 _ _ / 15 Push _ _ / 1Z Casambi
Materials Body: Aluminium. Shade: Polyester. Diffuser: PMMA - Polymethylmethacrylate. Light Source and electronics 1 x LED PLATE 26W 600mA Constant Current 600 mA 220~240V 50/60Hz	Packaging 1 Box 0,78 x 0,78 x 0,58 m Vol 0,3508 m³ Gross weight 6,7 Kg Net weight 2,99 Kg Notes Rigid stem	     

1707

Finishes ● 25/ _ _ Beige D1 (NCS S 4005-Y50R) ● 37/ _ _ Terra Red (NCS S 4040-Y70R) ● 56/ _ _ Green D1 (NCS S 7010-G30Y)	LED Colour Temperature /1 _ 2700 K - 2600 lm  CRI >90	Control 1707 _ _ / _ _ _ _ / 11 DALI-2 _ _ / 15 Push _ _ / 1Z Casambi
Materials Body: Aluminium. Shade: Polyester. Diffuser: PMMA - Polymethylmethacrylate. Light Source and electronics 1 x LED PLATE 26W 600mA Constant Current 600 mA 220~240V 50/60Hz	Packaging 1 Box 0,66 x 0,66 x 0,61 m Vol 0,2665 m³ Gross weight 5,8 Kg Net weight 2,7 Kg Notes Rigid stem	     

1709

Finishes ● 25/ _ _ Beige D1 (NCS S 4005-Y50R) ● 37/ _ _ Terra Red (NCS S 4040-Y70R) ● 56/ _ _ Green D1 (NCS S 7010-G30Y)	LED Colour Temperature /1 _ 2700 K - 2600 lm  CRI >90	Control 1709 _ _ / _ _ _ _ / 11 DALI-2 _ _ / 15 Push _ _ / 1Z Casambi
Materials Body: Aluminium. Shade: Polyester. Diffuser: PMMA - Polymethylmethacrylate. Light Source and electronics 1 x LED PLATE 26W 600mA Constant Current 600 mA 220~240V 50/60Hz	Packaging 1 Box 1,02 x 0,53 x 0,60 m Vol 0,3217 m³ Gross weight 6,6 Kg Net weight 2,98 Kg Notes Rigid stem	     



Rigid stem

Closer surface canopy adapts to both flat and sloped ceilings, ensuring correct luminaire orientation.
Two rigid stems (106 cm and 150 cm) are included in the packaging to select the appropriate installation height.

1710	Finishes 25/ _ _ Beige D1 (NCS S 4005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 56/ _ _ Green D1 (NCS S 7010-G30Y)	LED Colour Temperature /1 _ 2700 K - 1440 lm  CRI >90	Control 1710 _ _ / _ _ _ _ / 15 Push
	Materials Body: Aluminium. Shade: Polyester. Diffuser: PMMA - Polymethylmethacrylate.	Packaging 1 Box 0,79 x 0,79 x 0,74 m Vol 0,4629 m³ Gross weight 6,9 Kg Net weight 2,4 Kg	Notes Portable with battery. Battery capacity 20.800 mAh. Battery voltage 3,7V. Rechargeable battery autonomy: 10 h at 100% Intensity. 20 h at 50%Intensity. 40 h at 25% Intensity. The first battery charge must be 14 h. Plug-in driver IP44 Cable length: 3 m
	Light Source and electronics 1 x LED PLATE 6W 3,7V Constant Voltage 24V 220~240V. 50/60Hz	     	
1712	Finishes 25/ _ _ Beige D1 (NCS S 4005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 56/ _ _ Green D1 (NCS S 7010-G30Y)	LED Colour Temperature /1 _ 2700 K - 1440 lm  CRI >90	Control 1712 _ _ / _ _ _ _ / 15 Push
	Materials Body: Aluminium. Shade: Polyester. Diffuser: PMMA - Polymethylmethacrylate.	Packaging 1 Box 0,79 x 0,79 x 0,74 m Vol 0,4629 m³ Gross weight 6,8 Kg Net weight 2,3 Kg	Notes Portable with battery. Battery capacity 20.800 mAh. Battery voltage 3,7V. Rechargeable battery autonomy: 10 h at 100% Intensity. 20 h at 50%Intensity. 40 h at 25% Intensity. The first battery charge must be 14 h. Plug-in driver IP44 Cable length: 3 m
	Light Source and electronics 1 x LED PLATE 6W 3,7V Constant Voltage 24V 220~240V. 50/60Hz	     	
1714	Finishes 25/ _ _ Beige D1 (NCS S 4005-Y50R) 37/ _ _ Terra Red (NCS S 4040-Y70R) 56/ _ _ Green D1 (NCS S 7010-G30Y)	LED Colour Temperature /1 _ 2700 K - 1440 lm  CRI >90	Control 1714 _ _ / _ _ _ _ / 15 Push
	Materials Body: Aluminium. Shade: Polyester. Diffuser: PMMA - Polymethylmethacrylate.	Packaging 1 Box 1,02 x 0,53 x 0,60 m Vol 0,3217 m³ Gross weight 6,1 Kg Net weight 2,5 Kg	Notes Portable with battery. Battery capacity 20.800 mAh. Battery voltage 3,7V. Rechargeable battery autonomy: 10 h at 100% Intensity. 20 h at 50%Intensity. 40 h at 25% Intensity. The first battery charge must be 14 h. Plug-in driver IP44 Cable length: 3 m
	Light Source and electronics 1 x LED PLATE 6W 3,7V Constant Voltage 24V 220~240V. 50/60Hz	     	




Asia


Design by Antoni Arola

The Asia collection combines refinement, simplicity, and warmth. It captures the serenity of traditional Oriental gabled rooftops and the delicacy of a molded glass, reimagined into an elegantly timeless luminaire.


Pendant

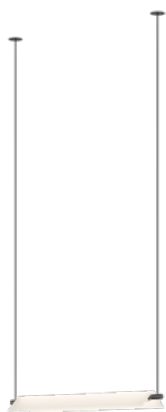

3625
45 cm

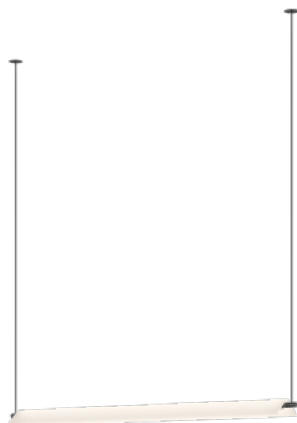

3627
85 cm

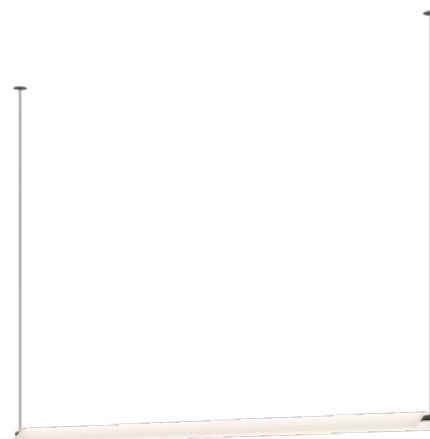

3630
125 cm

3625

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **23/** _ _ Warm White
(NCS S 0502-Y50R)
- **25/** _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 553 lm

F >90

Control

3625 _ _ / _ _

- _ _ / **11** DALI-2
- _ _ / **1B** Push; 1-10V
- _ _ / **1Z** Casambi

Select Electrical connection



Surface



Built-in XS



Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials

Shade: Lacquered glass.
Body: Stainless steel.
Diffuser: PC- Polycarbonate.
External diffuser: Ultra-clear quartz glass.

Light Source and electronics

1 x LED STRIP 24V 5,6W
Constant Voltage 24V
100~240V. 50/60Hz

Packaging

1 Box 0,15 x 0,78 x 0,31 m
Vol 0,036 m³
Gross weight 2,5 Kg Net weight 1,1 Kg

LED IP20 CE ENEC ENEC Bi-volt

3627

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **23/** _ _ Warm White
(NCS S 0502-Y50R)
 - **25/** _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 1185 lm
F 
CRI >90

Control
3627 _ _ / _ _
_ _ / **11** DALI-2
_ _ / **1B** Push; 1-10V
_ _ / **1Z** Casambi

 Select Electrical connection



Surface



Built-in XS



Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials

Shade: Lacquered glass.
Body: Stainless steel.
Diffuser: PC- Polycarbonate.
External diffuser: Ultra-clear quartz glass.

Light Source and electronics

1 x LED STRIP 24V 12W
Constant Voltage 24V
100-240V. 50/60Hz

Packaging

1 Box 0,15 x 0,17 x 0,31 m
Vol 0,054 m³
Gross weight 3,3 Kg Net weight 1,8 Kg

LED  IP20     Bi-volt

3630

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **23/** _ _ Warm White
(NCS S 0502-Y50R)
 - **25/** _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 1817 lm
F 
CRI >90

Control
3630 _ _ / _ _
_ _ / **11** DALI-2
_ _ / **1B** Push; 1-10V
_ _ / **1Z** Casambi

 Select Electrical connection



Surface



Built-in XS



Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials

Shade: Lacquered glass.
Body: Stainless steel.
Diffuser: PC- Polycarbonate.
External diffuser: Ultra-clear quartz glass.

Light Source and electronics

1 x LED STRIP 24V 18,4W
Constant Voltage 24V
100-240V. 50/60Hz

Packaging

1 Box 0,15 x 1,58 x 0,31 m
Vol 0,073 m³
Gross weight 4,2 Kg Net weight 2,4 Kg

LED  IP20     Bi-volt

Select Electrical connection

Choose your preferred installation option according to your needs.

For Ref. 3625

Drop ceiling



Ø 3 cm
height 7 cm
for plaster
ceilings.
Black finish.



Ø 8 cm
height 6 cm
Black finish.

Regular ceiling



21,5 x 5,8 x 5,8 cm
Black finish.

For Ref. 3627, 3630

Drop ceiling



Ø 3 cm
height 7 cm
for plaster
ceilings.
Black finish.



Ø 8 cm
height 6 cm
Black finish.

Regular ceiling



27 x 5,8 x 5,8 cm
Black finish.


Remote

Built-in






Floor Table

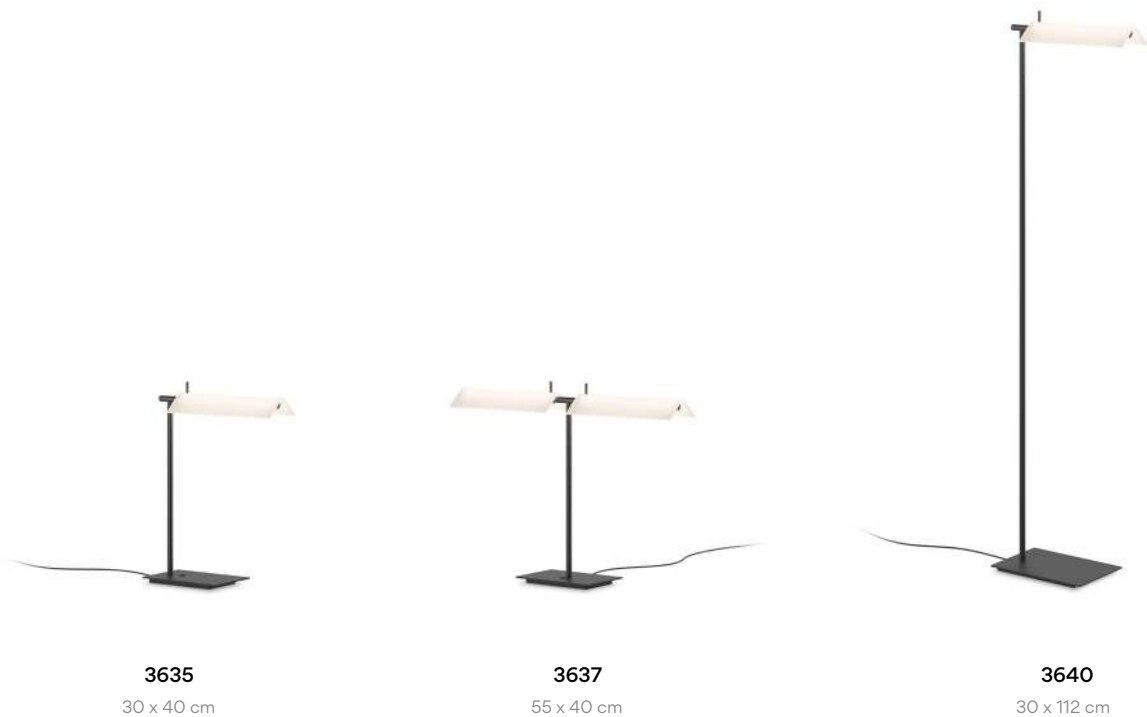

3635	Finishes	LED Colour Temperature	Control
	● 11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K - 331 lm	3635 _ _ / _ _
	● 23/ _ _ Warm White (NCS S 0502-Y50R)		_ _ / 15 Push
	● 25/ _ _ Beige D1 (NCS S 4005-Y50R)	CRI >90	_ _ / 1Z Casambi
Materials		Packaging	Notes
Shade: Lacquered glass. Body: Steel / Stainless steel. Diffuser: PC- Polycarbonate. External diffuser: Ultra-clear quartz glass.		1 Box 0,15 x 0,37 x 0,48 m Vol 0,027 m³ Gross weight 3,1 Kg Net weight 1,8 Kg	Cable length: 2,5 m.
Light Source and electronics		     	
1 x LED STRIP 24V 3,4W Constant Voltage 24V 100~240V. 50/60Hz			
3637	Finishes	LED Colour Temperature	Control
	● 11/ _ _ Black (NCS S 8500-N)	/1 _ 2700 K - 662 lm	3637 _ _ / _ _
	● 23/ _ _ Warm White (NCS S 0502-Y50R)		_ _ / 15 Push
	● 25/ _ _ Beige D1 (NCS S 4005-Y50R)	CRI >90	_ _ / 1Z Casambi
Materials		Packaging	Notes
Shade: Lacquered glass. Body: Steel / Stainless steel. Diffuser: PC- Polycarbonate. External diffuser: Ultra-clear quartz glass.		1 Box 0,20 x 0,49 x 0,64 m Vol 0,063 m³ Gross weight 4,5 Kg Net weight 2,2 Kg	Cable length: 2,5 m.
Light Source and electronics		     	
2 x LED STRIP 24V 3,4W Constant Voltage 24V 100~240V. 50/60Hz			

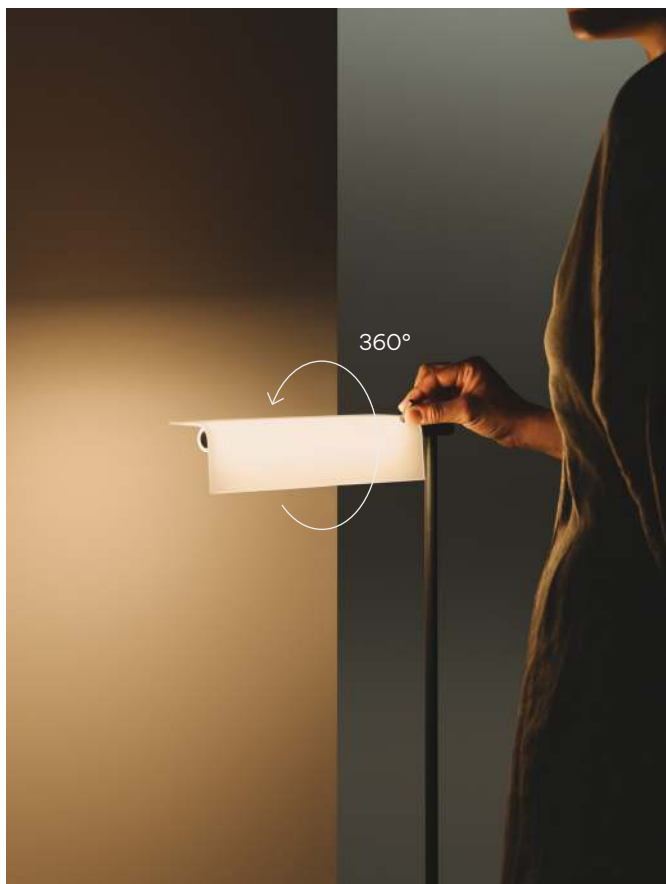

3640

- Finishes**
- 11/ _ _ Black
(NCS S 8500-N)
 - 23/ _ _ Warm White
(NCS S 0502-Y50R)
 - 25/ _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 331 lm
F >

CRI >90

Control

3640 _ _ / _ _

_ _ / 15 Push

_ _ / 12 Casambi

Materials

Shade: Lacquered glass.
Body: Steel / Stainless steel.
Diffuser: PC- Polycarbonate.
External diffuser: Ultra-clear quartz glass.

Light Source and electronics

1 x LED STRIP 24V 3,4W
Constant Voltage 24V
100-240V. 50/60Hz

Packaging

1 Box 0,30 x 1,27 x 0,45 m
Vol 0,171 m³
Gross weight 6,7 Kg Net weight 3,2 Kg

Notes

Cable length: 2,5 m.
Switch on the cable.

LED IP20 CE UK ENEC Bi-volt

Floor switch



Table switch



Alba

Design by Palomba Serafini Associati

Alba evokes dawn's first light with two softly balanced volumes, a glossy circular base and a luminous cylindrical diffuser, meeting in a subtle tangent to create a poetic, ethereal glow that blends form and illumination.

Floor Table



3780

Ø 20 cm

3780

Finishes

- 24/ _ _ Beige M1
(NCS S 2005-Y50R)
- 38/ _ _ Terra Dark
(NCS S 5040-Y70R)
- 56/ _ _ Green D1
(NCS S 7010-G30Y)

LED Colour Temperature

/1 _ 2700 K - 218 lm
F >

CRI >90

Control

3780 _ _ / _ _

_ _ / 15 Push

Materials

Body: Aluminium.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics

1 x LED 2,1W 700mA
Constant Voltage 24V
5V 2A 50/60Hz

Packaging

1 Box 0,13 x 0,31 x 0,13 m
Vol 0,0052 m³
Gross weight 0,9 Kg Net weight 0,6 Kg

Notes

Portable with battery.
Battery capacity 5.000mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
15h at 100% Intensity.
30h at 50% Intensity.
60h at 25% Intensity.
The first battery charge must be 12 h.
Cable length: 1,5 m

LED > IP20 CE UK ENE Bi-volt

A52280/00

USB-C charger
DC5V 2A 10W

Control

A52280 / 00



Nexum

Design by Arik Levy

Nexum reinterprets the chandelier with intertwining metal profiles, creating a balanced, three-dimensional light that fuses geometry and character into a striking statement.

Volumetric




5100
60 x 60 cm




5102
90 x 40 cm




5104
120 x 120 cm




5110
Ø 120 cm



5112
Ø 180 cm



5106
270 x 270 cm

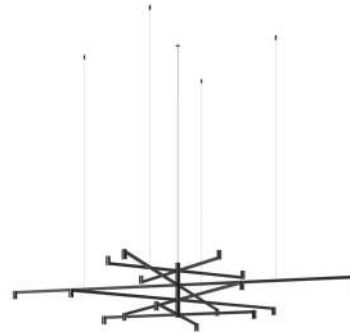

5114
Ø 270 cm

5100

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1212 lm
/2 _ 3000 K - 1268 lm
/3 _ 3500 K - 1312 lm
/4 _ 4000 K - 1340 lm
G
CRI >90

Control
5100 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Select Electrical connection



Surface



Built-in XS

Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics
4 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging
1 Box 0,19 x 0,56 x 0,56 m
Vol 0,059 m³
Gross weight 4,5 Kg Net weight 3 Kg

LED IP20 CE UK ENEC Multi-volt

5102

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1818 lm
/2 _ 3000 K - 1902 lm
/3 _ 3500 K - 1968 lm
/4 _ 4000 K - 2010 lm
G
CRI >90

Control
5102 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Select Electrical connection



Surface



Built-in XS

Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.


Light Source and electronics
6 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging
1 Box 0,51 x 0,42 x 1,1 m
Vol 0,235 m³
Gross weight 5 Kg Net weight 3,5 Kg

LED IP20 CE UK ENEC Multi-volt

5104		Finishes ● 11/ _ _ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 3636 lm /2 _ 3000 K - 3804 lm /3 _ 3500 K - 3936 lm /4 _ 4000 K - 4020 lm  CRI >90	Control 5104 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
		Select Electrical connection   Surface Built-in XS Remote Micro		
		Materials Body: Aluminium. Lens: PC- Polycarbonate. Canopy: Fe-Iron. Light Source and electronics 12 x LED 5W 250mA Constant Voltage 24V 90~305V. 50/60Hz		
		Packaging 1 Box 0,6 x 1,01 x 1,01 m Vol 0,612 m³ Gross weight 6,9 Kg Net weight 5 Kg      		

5106		Finishes ● 11/ _ _ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 4848 lm /2 _ 3000 K - 5072 lm /3 _ 3500 K - 5248 lm /4 _ 4000 K - 5360 lm  CRI >90	Control 5106 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
		Select Electrical connection   Surface Built-in XS Remote Micro		
		Materials Body: Aluminium. Lens: PC- Polycarbonate. Canopy: Fe-Iron. Light Source and electronics 16 x LED 5W 250mA Constant Voltage 24V 90~305V. 50/60Hz		
		Packaging 1 Box 0,07 x 0,53 x 2,9 m Vol 0,107 m³ Gross weight 9,9 Kg Net weight 7,5 Kg      		



5110

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4848 lm
/2 _ 3000 K - 5072 lm
/3 _ 3500 K - 5248 lm
/4 _ 4000 K - 5360 lm
G
CRI >90

Control
5110 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Select Electrical connection



Surface



Built-in XS

Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics
16 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging
1 Box 0,6 x 1,01 x 1,01 m
Vol 0,612 m³
Gross weight 7,9 Kg Net weight 5,7 Kg

LED IP20 CE UK ENE Multi-volt

5112

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4848 lm
/2 _ 3000 K - 5072 lm
/3 _ 3500 K - 5248 lm
/4 _ 4000 K - 5360 lm
G
CRI >90

Control
5112 _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

Select Electrical connection



Surface



Built-in XS

Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.


Light Source and electronics
16 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging
1 Box 0,73 x 1,25 x 1,25 m
Vol 1,140 m³
Gross weight 9,3 Kg Net weight 6,9 Kg

LED IP20 CE UK ENE Multi-volt



5114

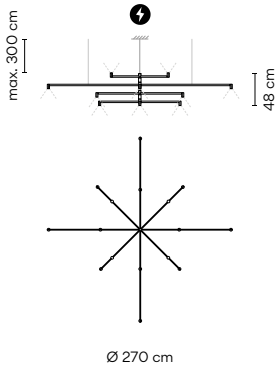

Finishes

●

11/

Black

(NCS S 8500-N)

LED Colour Temperature

/1_

2700 K

-

4848 lm

/2_

3000 K

-

5072 lm

/3_

3500 K

-

5248 lm

/4_

4000 K

-

5360 lm

G

CRI >90

Control

5114_/_/_

//_

1

DALI-2

//_

3

1-10V

//_

Z

Casambi

Select Electrical connection



Surface



Built-in XS

Remote Micro

_10

Surface

_23

Built-in XS

_31

Remote Micro

Materials

Body: Aluminium.

Lens: PC- Polycarbonate.

Canopy: Fe-Iron.

Light Source and electronics

16 x LED 5W 250mA

Constant Voltage 24V

90~305V. 50/60Hz

Packaging

1 Box 0,73 x 1,25 x 1,25 m

Vol 1,140 m³

Gross weight 10,8 Kg

Net weight 8,2 Kg

LED

IP20

Multi-volt

Select Electrical connection

Choose your preferred installation option according to your needs.

Drop ceiling

Ø 3 cm
height 7 cm
for plaster
ceilings.
Black finish.



Ø 8 cm
height 6 cm
Black finish.

Regular ceiling

Ø 28 cm
height 3,8 cm
Black finish.






Remote

Built-in





Lineal

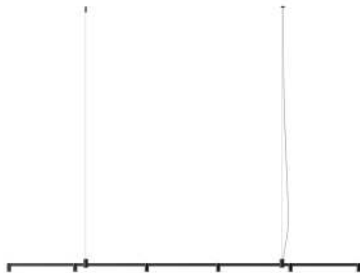

5120
120 cm

5122
180 cm

5124
270 cm

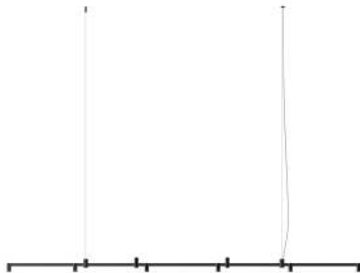


5150
120 cm

5152
180 cm

5154
270 cm

5120

Ceiling and Pendant Option



Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 909 lm
/2 _ 3000 K - 951 lm
/3 _ 3500 K - 984 lm
/4 _ 4000 K - 1005 lm
G
CRI >90

Control

5120 _ _ / _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Built-in XS Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

3 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 1,46 x 0,15 x 0,15 m
Vol 0,032 m³
Gross weight 5,2 Kg Net weight 4 Kg


Notes

Option to add extra spots (please consult us).

LED IP20 CE UK ENEC Multi-volt

5122

Ceiling and Pendant Option



Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1212 lm
/2 _ 3000 K - 1268 lm
/3 _ 3500 K - 1312 lm
/4 _ 4000 K - 1340 lm
G
CRI >90

Control

5122 _ _ / _
_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Built-in XS Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

4 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz





Packaging

1 Box 2,25 x 0,15 x 0,15 m
Vol 0,050 m³
Gross weight 5,6 Kg Net weight 4,3 Kg

Notes


Option to add extra spots (please consult us).

LED IP20 CE UK ENEC Multi-volt

5124	Ceiling and Pendant Option 		Finishes ● 11/ _ _ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 1818 lm /2 _ 3000 K - 1902 lm /3 _ 3500 K - 1968 lm /4 _ 4000 K - 2010 lm G CRI >90	Control 5124 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
	Select Electrical connection 				
Materials Body: Aluminium. Lens: PC- Polycarbonate. Canopy: Fe-Iron. Light Source and electronics 6 x LED 5W 250mA Constant Voltage 24V 90~305V. 50/60Hz				Packaging 1 Box 3,3 x 0,15 x 0,15 m Vol 0,074 m³ Gross weight 6 Kg Net weight 4,7 Kg Notes Option to add extra spots (please consult us). LED  IP20     Multi-volt	
5150			Finishes ● 11/ _ _ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 1212 lm /2 _ 3000 K - 1268 lm /3 _ 3500 K - 1312 lm /4 _ 4000 K - 1340 lm G CRI >90	Control 5150 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
	Select Electrical connection 				
Materials Body: Aluminium. Lens: PC- Polycarbonate. Canopy: Fe-Iron. Light Source and electronics 4 x LED 5W 250mA Constant Voltage 24V 90~305V. 50/60Hz				Packaging 1 Box 1,46 x 0,15 x 0,15 m Vol 0,032 m³ Gross weight 5,6 Kg Net weight 4,3 Kg Notes Option to add extra spots (please consult us). LED  IP20     Multi-volt	



5152



Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1818 lm
/2 _ 3000 K - 1902 lm
/3 _ 3500 K - 1968 lm
/4 _ 4000 K - 2010 lm
G
CRI >90

Control

5152 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Built-in XS Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics
6 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging


1 Box 2,25 x 0,15 x 0,15 m
Vol 0,050 m³
Gross weight 5,9 Kg Net weight 4,6 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 CE UK ENE Multi-volt

5154



Finishes
● 11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2424 lm
/2 _ 3000 K - 2536 lm
/3 _ 3500 K - 2624 lm
/4 _ 4000 K - 2680 lm
G
CRI >90

Control

5154 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Built-in XS Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics
8 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 3,3 x 0,15 x 0,15 m
Vol 0,074 m³
Gross weight 6,3 Kg Net weight 5 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 CE UK ENE Multi-volt


Rectangular




5130
120 cm



5132
180 cm




5134
270 cm



5160
120 cm




5162
180 cm



5164
270 cm

5130

Ceiling and Pendant Option



Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 2121 lm
 /2 _ 3000 K - 2219 lm
 /3 _ 3500 K - 2296 lm
 /4 _ 4000 K - 2345 lm
 G
 CRI >90

Control

5130 _ _ / _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Built-in XS Remote Micro

_10 Surface
 _23 Built-in XS
 _31 Remote Micro

Materials

Body: Aluminium.
 Lens: PC- Polycarbonate.
 Canopy: Fe-Iron.

Light Source and electronics

7 x LED 5W 250mA
 Constant Voltage 24V
 90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,35x 0,68 m
 Vol 0,166 m³
 Gross weight 6,9 Kg Net weight 4,8 Kg


Notes

Option to add extra spots (please consult us).

LED IP20 CE UK ENEC Multi-volt

5132

Ceiling and Pendant Option



Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 3030 lm
 /2 _ 3000 K - 3170 lm
 /3 _ 3500 K - 3280 lm
 /4 _ 4000 K - 3350 lm
 G
 CRI >90

Control

5132 _ _ / _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Built-in XS Remote Micro

_10 Surface
 _23 Built-in XS
 _31 Remote Micro

Materials

Body: Aluminium.
 Lens: PC- Polycarbonate.
 Canopy: Fe-Iron.

Light Source and electronics

10 x LED 5W 250mA
 Constant Voltage 24V
 90~305V. 50/60Hz



Packaging

1 Box 0,18 x 1,92x 0,68 m
 Vol 0,237 m³
 Gross weight 7,9 Kg Net weight 5,6 Kg

Notes


Option to add extra spots (please consult us).

LED IP20 CE UK ENEC Multi-volt

5134		Finishes ● 11/ _ _ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 4848 lm /2 _ 3000 K - 5072 lm /3 _ 3500 K - 5248 lm /4 _ 4000 K - 5360 lm  CRI >90	Control 5134 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
		Select Electrical connection  Surface Built-in XS Remote Micro		
		Materials Body: Aluminium. Lens: PC- Polycarbonate. Canopy: Fe-Iron. Light Source and electronics 16 x LED 5W 250mA Constant Voltage 24V 90~305V. 50/60Hz		
		Packaging 1 Box 0,18 x 1,92 x 0,68 m Vol 0,237 m³ Gross weight 11,2 Kg Net weight 8,3 Kg Notes Option to add extra spots (please consult us).      		
		_10 Surface _23 Built-in XS _31 Remote Micro		
5160		Finishes ● 11/ _ _ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 2424 lm /2 _ 3000 K - 2536 lm /3 _ 3500 K - 2624 lm /4 _ 4000 K - 2680 lm  CRI >90	Control 5160 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
		Select Electrical connection  Surface Built-in XS Remote Micro		
		Materials Body: Aluminium. Lens: PC- Polycarbonate. Canopy: Fe-Iron. Light Source and electronics 8 x LED 5W 250mA Constant Voltage 24V 90~305V. 50/60Hz		
		Packaging 1 Box 0,18 x 1,35 x 0,68 m Vol 0,166 m³ Gross weight 7,2 Kg Net weight 5,1 Kg Notes Option to add extra spots (please consult us).      		
		_10 Surface _23 Built-in XS _31 Remote Micro		



5162



Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 3636 lm
 /2 _ 3000 K - 3804 lm
 /3 _ 3500 K - 3936 lm
 /4 _ 4000 K - 4020 lm
 G
 CRI >90

Control

5162 _ _ / _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Built-in XS Remote Micro

_10 Surface
 _23 Built-in XS
 _31 Remote Micro

Materials
 Body: Aluminium.
 Lens: PC- Polycarbonate.
 Canopy: Fe-Iron.

Light Source and electronics
 12 x LED 5W 250mA
 Constant Voltage 24V
 90~305V. 50/60Hz

Packaging


1 Box 0,18 x 1,92 x 0,68 m
 Vol 0,237 m³
 Gross weight 8,3 Kg Net weight 5,9 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 CE UK ENE Multi-volt

5164



Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 5454 lm
 /2 _ 3000 K - 5706 lm
 /3 _ 3500 K - 5904 lm
 /4 _ 4000 K - 6030 lm
 G
 CRI >90

Control

5164 _ _ / _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Built-in XS Remote Micro

_10 Surface
 _23 Built-in XS
 _31 Remote Micro

Materials
 Body: Aluminium.
 Lens: PC- Polycarbonate.
 Canopy: Fe-Iron.

Light Source and electronics
 18 x LED 5W 250mA
 Constant Voltage 24V
 90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,92 x 0,68 m
 Vol 0,237 m³
 Gross weight 11,6 Kg Net weight 8,6 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 CE UK ENE Multi-volt



Select Electrical connection

Choose your preferred installation option according to your needs.

For Ref. 5120, 5122, 5124, 5130, 5150, 5122, 5124, 5160

Drop ceiling

Regular ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

Ø 8 cm
height 6 cm

Black finish.

28 x 4,5 x 9,6 cm

Black finish.

For Ref. 5132, 5134, 5162, 5164

Drop ceiling

Regular ceiling



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

Ø 8 cm
height 6 cm


Black finish.

40 x 4,5 x 9,6 cm

Black finish.

Remote

Built-in

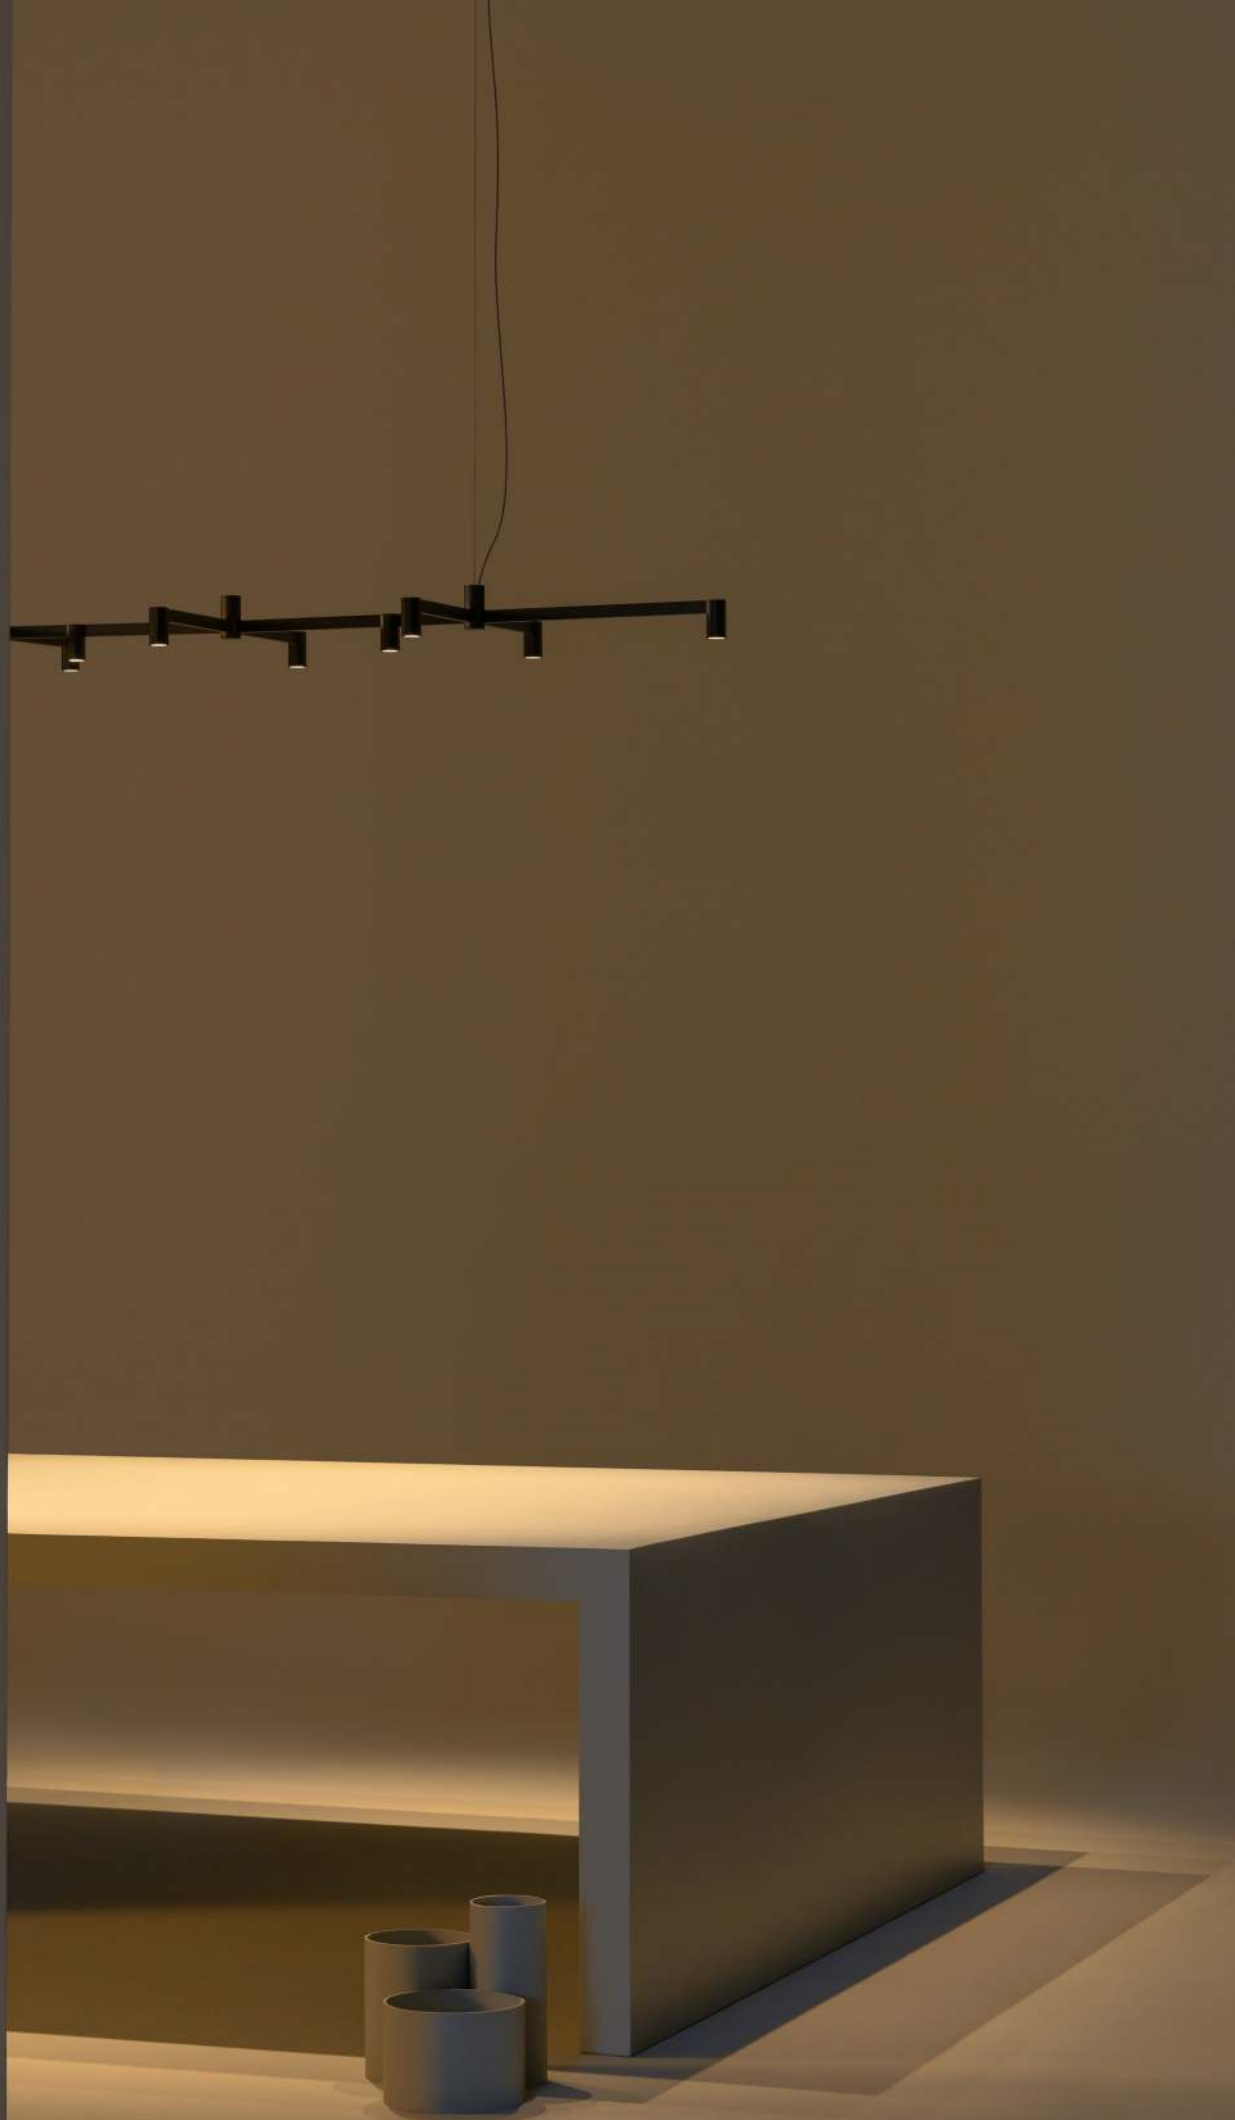


Square




5140
120 x 120 cm




5142
180 x 180 cm

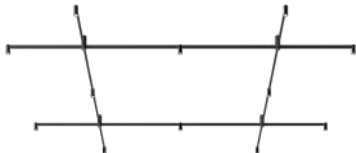

5144
270 x 270 cm

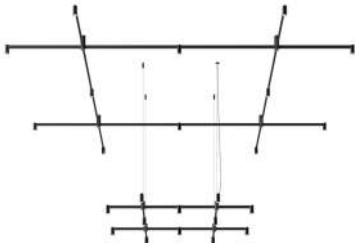

5146
120 x 120 cm
270 x 270 cm




5140
120 x 120 cm




5142
180 x 180 cm



5144
270 x 270 cm

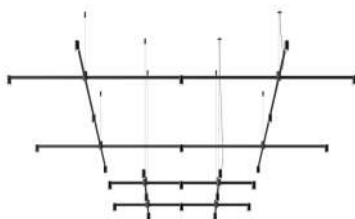


5146
120 x 120 cm
270 x 270 cm




5170
120 x 120 cm



5172
180 x 180 cm

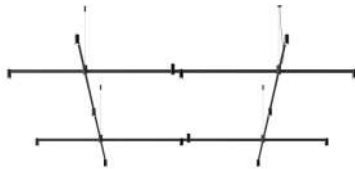



5174
270 x 270 cm

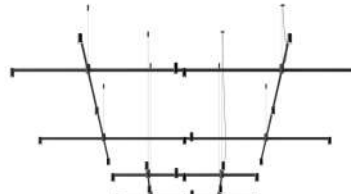

5176
120 x 120 cm
270 x 270 cm

5140

Ceiling and Pendant Option



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3636 lm
/2 _ 3000 K - 3804 lm
/3 _ 3500 K - 3936 lm
/4 _ 4000 K - 4020 lm

G →

CRI >90

Control

5140 _ _ / _ _

_ _ / _ 1 DALI-2

_ _ / _ 3 1-10V

_ _ / _ Z Casambi

Select Electrical connection



Surface

Built-in XS

Remote
Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

12 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging


1 Box 0,18 x 1,35 x 1,35 m
Vol 0,328 m³
Gross weight 8,3 Kg Net weight 6 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 CE ENEC ENEC Multi-volt

_10 Surface
_23 Built-in XS
_31 Remote
Micro

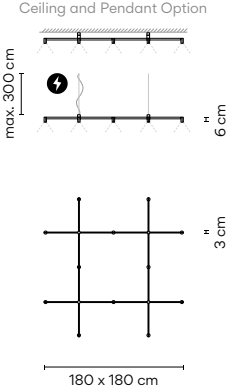5142	Ceiling and Pendant Option max. 300 cm 			Finishes ● 11/ _ _ Black (NCS S 8500-N)
------	---	--	--	--

LED Colour Temperature

/1 _ 2700 K - 3636 lm

/2 _ 3000 K - 3804 lm

/3 _ 3500 K - 3936 lm

/4 _ 4000 K - 4020 lm

G

CRI >90

Control


5142 _ _ / _ _

_ _ / _ 1 DALI-2

_ _ / _ 3 1-10V

_ _ / _ Z Casambi

5146

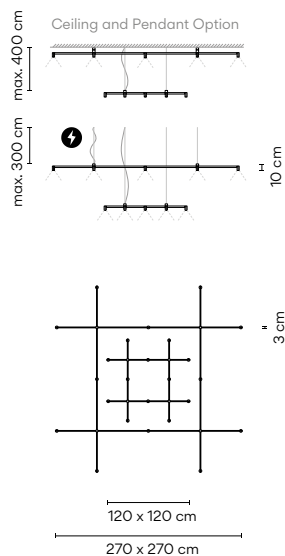

Finishes

- 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 7272 lm
- /2 _ 3000 K - 7608 lm
- /3 _ 3500 K - 7872 lm
- /4 _ 4000 K - 8040 lm

G

CRI >90

Control

5146 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ 3 1-10V
- _ _ / _ Z Casambi

Select Electrical connection



Surface Built-in XS Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

24 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

2 Boxes
Total Vol 0,508 m³
Gross weight 18 Kg Net weight 13,6 Kg


Notes

Option to add extra spots (please consult us).
Requires only one electrical connection.

LED IP20 CE UK ENE Multi-volt

_10 Surface
_23 Built-in XS
_31 Remote Micro

5170



Finishes

- 11/ _ _ Black (NCS S 8500-N)

LED Colour Temperature

- /1 _ 2700 K - 4242 lm
- /2 _ 3000 K - 4438 lm
- /3 _ 3500 K - 4592 lm
- /4 _ 4000 K - 4690 lm

G

CRI >90

Control

5170 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ 3 1-10V
- _ _ / _ Z Casambi

Select Electrical connection



Surface Built-in XS Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

14 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,35 x 1,35 m
Vol 0,328 m³
Gross weight 8,6 Kg Net weight 6,3 Kg

Notes

Option to add extra spots (please consult us).



LED IP20 CE UK ENE Multi-volt

_10 Surface
_23 Built-in XS
_31 Remote Micro

5172		Finishes	LED Colour Temperature	Control
		● 11/ _ Black (NCS S 8500-N)	/1 _ 2700 K - 4242 lm /2 _ 3000 K - 4438 lm /3 _ 3500 K - 4592 lm /4 _ 4000 K - 4690 lm CRI >90	5172 _ _ / _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
5174		Select Electrical connection		
		Surface	Built-in XS	Remote Micro
5172		Materials	Packaging	Notes
		Body: Aluminium. Lens: PC- Polycarbonate. Canopy: Fe-Iron. Light Source and electronics 14 x LED 5W 250mA Constant Voltage 24V 90~305V. 50/60Hz	1 Box 0,18 x 1,35 x 1,35 m Vol 0,328 m³ Gross weight 9,4 Kg Net weight 6,9 Kg Option to add extra spots (please consult us).	
5174		Finishes	LED Colour Temperature	Control
		● 11/ _ Black (NCS S 8500-N)	/1 _ 2700 K - 4242 lm /2 _ 3000 K - 4438 lm /3 _ 3500 K - 4592 lm /4 _ 4000 K - 4690 lm CRI >90	5174 _ _ / _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ Z Casambi
5174		Select Electrical connection		
		Surface	Built-in XS	Remote Micro
5174		Materials	Packaging	Notes
		Body: Aluminium. Lens: PC- Polycarbonate. Canopy: Fe-Iron. Light Source and electronics 14 x LED 5W 250mA Constant Voltage 24V 90~305V. 50/60Hz	1 Box 0,18 x 1,68 x 1,68 m Vol 0,508 m³ Gross weight 10,6 Kg Net weight 7,9 Kg Option to add extra spots (please consult us).	



5176



Finishes
11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K - 8484 lm
 /2 _ 3000 K - 8876 lm
 /3 _ 3500 K - 9184 lm
 /4 _ 4000 K - 9380 lm
G
 CRI >90

Control

5176 _ _ / _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

Select Electrical connection



Surface Built-in XS Remote
Micro

_10 Surface
 _23 Built-in XS
 _31 Remote
 Micro

Materials

Body: Aluminium.
 Lens: PC- Polycarbonate.
 Canopy: Fe-Iron.

Light Source and electronics

28 x LED 5W 250mA
 Constant Voltage 24V
 90~305V. 50/60Hz

Packaging

2 Boxes
 Total Vol 0,836 m³
 Gross weight 18 Kg Net weight 13,9 Kg

Notes

Option to add extra spots (please consult us).
 Requires only one electrical connection.

LED IP20 CE UK ENEC Multi-volt

Select Electrical connection

Choose your preferred installation option
 according to your needs.

For Refs. 5140, 5142, 5144, 5170, 5172, 5174

Drop ceiling

Regular ceiling



Ø 3 cm
 height 7 cm
 for plaster
 ceilings.
 Black finish.

Remote

Ø 8 cm
 height 6 cm
 Black finish.

Built-in

29 x 29 x 4 cm
 Black finish.

For Refs. 5146, 5176

Drop ceiling

Regular ceiling



Ø 3 cm
 height 7 cm
 for plaster
 ceilings.
 Black finish.


Ø 8 cm
 height 6 cm
 Black finish.

29 x 29 x 4 cm
 Black finish.


Use Guide

The Nexum collection is structured into four typologies: Lineal, Rectangular, Square and Volumetric. Each configuration responds to a specific geometry and a defined method of light distribution, providing solutions adapted to different spatial scales and lighting requirements. This user guide outlines the recommended application of each typology, supporting accurate specification according to the characteristics of the space and enabling the selection of the most appropriate illuminance level for each type of environment.

Nexum delivers even ground illumination from elevated heights, with precisely positioned spotlights and calibrated beam angles ensuring controlled, uniform light.



This diagram provides a general graphical reference on which the lighting calculations are based, considering two standard suspension heights (H1, H2). Depending on the typology, these heights may vary, as spatial integration and resulting illuminance levels differ according to the selected luminaire.

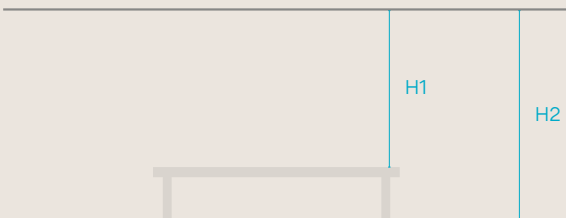

Lineal

The Lineal typology is ideal for longitudinal spaces where uniformity and precision are required.

Its distribution optimizes the lighting on continuous surfaces such as kitchen islands, workstations or corridors, ensuring visual comfort and a clean reading of the space.

It is particularly suitable for environments where functionality and light clarity are a priority, providing a balance between technical performance and discreet presence.

The **Downlighting & Uplighting** version enhances the perception of luminosity within the space. By illuminating the ceiling, it creates a more expansive ambient light with fewer light points.

* H1 = 1 m

Distance from the luminaire to a table or other surface to be illuminated

* H2 = 3 m

Distance from the luminaire to the floor

5120



5150




5122




5152



5124



5154





Rectangular

The Rectangular typology structures light within a defined perimeter, generating a sufficient volume of illumination over large and clearly delimited areas.

Suitable for large format tables, meeting/conference rooms requiring **500 lux**, as well as receptions or open workspaces with **300-500 lux** requirements.

Its configuration improves uniformity in wide rectangular planes and facilitates the fulfillment of average illuminance values, optimizing the relationship between number of light points and covered surface.

The **Downlighting & Uplighting** version enhances the overall luminosity of the space. Ideal for meeting rooms, it fosters an atmosphere of concentration and focus, while establishing a clear hierarchy of light that guides the user's gaze.


*** H1 = 1,5 m**

Distance from the luminaire to a table or other surface to be illuminated


*** H2 = 3 m**

Distance from the luminaire to the floor


5130




5160




5132




5162



5134



5164



Square


The Square typology is especially suitable for lounge areas, lobbies or medium-sized meeting rooms, where you want to prioritize a specific area without overloading the environment.

It allows reaching **300-500 lux** in meeting rooms, **300 lux** in lounge or hospitality areas for occasional work, and lower levels **200 lux** in transition or waiting zones.


Its configuration favors a balanced uniformity on the useful plane and reduces excessive contrasts, ensuring visual comfort and spatial consistency in medium-scale environments.

By illuminating the ceiling with the **Downlighting & Uplighting** luminaires, a greater sense of luminosity is achieved throughout the space, reducing the number of light points required. For large areas such as lobbies or spacious rooms, it offers an effective solution for creating a well-balanced lighting environment.


5140




5142




5144




5146

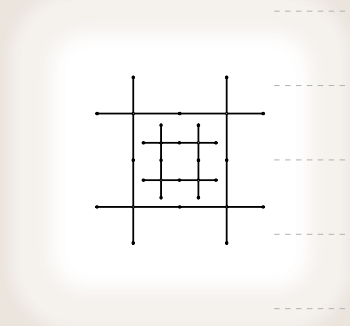


5170




5172



5174

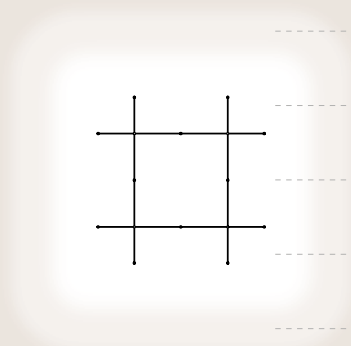

5176



Volumetric

The Volumetric typology incorporates a three-dimensional configuration that multiplies the emission points, allowing to extend the light coverage in larger spaces or with significant heights.

Pendant Downlighting references 5100 and 5102, of more contained dimensions, offer a suitable luminous flux to reach appropriate levels of illuminance in auxiliary tables, coffee tables or workstations of reduced scale, ensuring uniformity and visual comfort.

Downlighting & Uplighting references 5104, 5106, 5110, 5112 and 5114 are designed for larger applications, such as double heights, lobbies, restaurants or showrooms, where a greater coverage area and spatial presence is required.

Its configuration optimizes the distribution of the luminous flux in wide spaces, maintaining a light and architectural structural reading, and facilitating compliance with the lighting and visual comfort requirements specific to contract and representative environments.

*** H1 = 1,5 m**

Distance from the luminaire to a table or other surface to be illuminated

*** H2 = 3 m**

Distance from the luminaire to the floor

5100


Ø 1,5 m

5102

Ø 1,5 m


5104

Ø 2 m




5110

Ø 2,2 m




5106

Ø 3 m




5112

Ø 2,2 m



5114

Ø 2,5 m



Pro

Design by Holscher Design

The spotlight concept is reimagined with Pro. Three different diameters offer greater compositional freedom, combining various levels of high-performance luminous flux while ensuring visual harmony between luminaires of different sizes within a project. Pro shapes spaces, moods and atmospheres through dynamic light effects, expressed in a sculptural and refined geometry that integrates seamlessly into any interior project.

Ceiling - Accent Spotlight



Ø 7 cm

7000 Narrow
7002 Medium
7004 Wide



Ø 9 cm

7010 Narrow
7012 Medium
7014 Wide



Ø 12 cm

7020 Narrow
7022 Medium
7024 Wide



Ø 7 cm

7030 Narrow
7032 Medium
7034 Wide



Ø 9 cm

7040 Narrow
7042 Medium
7044 Wide



Ø 12 cm

7050 Narrow
7052 Medium
7054 Wide



Ø 7 cm

7030 Narrow
7032 Medium
7034 Wide



Ø 9 cm

7040 Narrow
7042 Medium
7044 Wide



Ø 12 cm

7050 Narrow
7052 Medium
7054 Wide

7000
SURFACE Narrow
7002
SURFACE Medium
7004
SURFACE Wide

Finishes
● **11/** _ _ Black
(NCS S 8500-N)
● **23/** _ _ Warm White
(NCS S 0502-Y50R)
● **24/** _ _ Beige M1
(NCS S 2005-Y50R)


LED Colour Temperature
Static White
/1 _ 2700 K - 1098 lm
/2 _ 3000 K - 1148 lm
/3 _ 3500 K - 1189 lm
/4 _ 4000 K - 1214 lm
F →

Control
7000 _ _ / _ _
7002 _ _ / _ _
7004 _ _ / _ _
_ _ / _ **O_10** On/ Off
_ _ / _ **D_10** Push; DALI-2
_ _ / _ **Z_10** Casambi

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.
Light Source and electronics
1 x LED 10,4W 600 mA
Constant Current 600 mA
220-240V. 50/60Hz

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,71 Kg Net weight 0,61 Kg

LED IP20 CE UK ENE

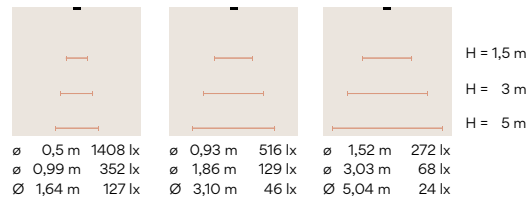

7010
SURFACE Narrow
7012
SURFACE Medium
7014
SURFACE Wide

Finishes
● **11/** _ _ Black
(NCS S 8500-N)
● **23/** _ _ Warm White
(NCS S 0502-Y50R)
● **24/** _ _ Beige M1
(NCS S 2005-Y50R)


LED Colour Temperature
Static White
/1 _ 2700 K - 1961 lm
/2 _ 3000 K - 2050 lm
/3 _ 3500 K - 2124 lm
/4 _ 4000 K - 2300 lm
E →

Control
7010 _ _ / _ _
7012 _ _ / _ _
7014 _ _ / _ _
_ _ / _ **O_10** On/ Off
_ _ / _ **D_10** Push; DALI-2
_ _ / _ **Z_10** Casambi

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.
Light Source and electronics
1 x LED 17,1W 500 mA
Constant Current 500 mA
220-240V. 50/60Hz

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,99 Kg Net weight 0,89 Kg

LED IP20 CE UK ENE

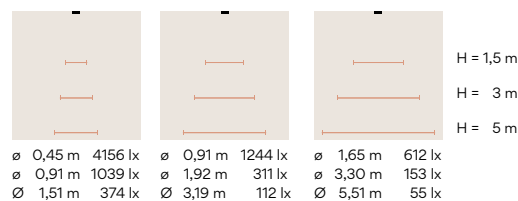

7020 SURFACE Narrow	Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature Static White /1 _ 2700 K - 2676 lm /2 _ 3000 K - 2798 lm /3 _ 3500 K - 2899 lm /4 _ 4000 K - 2960 lm E ➤	Control 7020 _ _ / _ _ 7022 _ _ / _ _ 7024 _ _ / _ _ _ _ / _ O _ 10 On/ Off _ _ / _ D _ 10 Push; DALI-2 _ _ / _ Z _ 10 Casambi
7022 SURFACE Medium			
7024 SURFACE Wide			
Materials Body: Aluminium. Lens: PC- Polycarbonate.		Packaging 1 Box 0,217 x 0,217 x 0,24 m Vol 0,0113 m³ Gross weight 2,49 Kg Net weight 2,34 Kg	
Light Source and electronics 1 x LED 24,8W 700 mA Constant Current 700 mA 220~240V. 50/60Hz		LED ⓘ IP20 CE UK ENE ⓘ	

			H = 1,5 m
			H = 3 m
			H = 5 m
Ø 0,45 m 5652 lx Ø 0,9 m 1413 lx Ø 1,49 m 509 lx	Ø 0,91 m 1660 lx Ø 1,92 m 415 lx Ø 3,20 m 150 lx	Ø 1,69 m 800 lx Ø 3,38 m 200 lx Ø 5,63 m 72 lx	



Luminous flux 800 - 2.800 lm

7030
Narrow
7032
Medium
7034
Wide

TRIM

Finishes
● 11/ _ _ Black
(NCS S 8500-N)
● 23/ _ _ Warm White
(NCS S 0502-Y50R)
● 24/ _ _ Beige M1
(NCS S 2005-Y50R)


LED Colour Temperature
Static White
/1_ 2700 K - 1098 lm
/2_ 3000 K - 1148 lm
/3_ 3500 K - 1189 lm
/4_ 4000 K - 1214 lm
Tunable White
/8_ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control
7030 _ _ / _ _
7032 _ _ / _ _
7034 _ _ / _ _

_ _ / _ _ O On/ Off
_ _ / _ _ D Push; DALI-2
_ _ / _ _ M Without driver
_ _ / _ _ Z Casambi

_ _ / 81 Tunable White +
DALI-2
_ _ / 8M Tunable White +
Without driver
_ _ / 8Z Tunable White +
Casambi

⚡ Select Electrical connection



Built-in
Trim

Built-in
Trimless

_2A Built-in
Trim
_2B Built-in
Trimless

TRIMLESS

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500 K - 4000 K:

1 x LED 10,4W 600 mA
Constant Current 600 mA
220-240V. 50/60Hz

Tunable White:

1 x LED 5,5 W 150 mA
Constant Current 150 mA
110-240V. 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,51 Kg Net weight 0,41 Kg

TRIM

LED IP20 CE UK ENE Ø 9 cm

TRIMLESS

LED IP20 CE UK ENE Ø 10,6 cm

			H = 1,5 m
			H = 3 m
			H = 5 m
ø 0,5 m 1408 lx	ø 0,93 m 516 lx	ø 1,52 m 272 lx	
ø 0,99 m 352 lx	ø 1,86 m 129 lx	ø 3,03 m 68 lx	
ø 1,64 m 127 lx	ø 3,10 m 46 lx	ø 5,04 m 24 lx	



7040 Narrow	Finishes ● 11/ _ _ Black (NCS S 8500-N) ● 23/ _ _ Warm White (NCS S 0502-Y50R) ● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	LED Colour Temperature Static White /1 _ 2700 K - 1961 lm /2 _ 3000 K - 2050 lm /3 _ 3500 K - 2124 lm /4 _ 4000 K - 2300 lm E	Control 7040 _ _ / _ _ 7042 _ _ / _ _ 7044 _ _ / _ _ _ _ / _ 0 On/ Off _ _ / _ D Push; DALI-2 _ _ / _ M Without driver _ _ / _ Z Casambi
7042 Medium		Tunable White /8 _ (1800 K - 4000 K) 571 lm - 895 lm F	
7044 Wide		CRI >90	_ _ / 81 Tunable White + DALI-2 _ _ / 8M Tunable White + Without driver _ _ / 8Z Tunable White + Casambi
TRIM			

TRIMLESS

⚡ Select Electrical connection



Built-in Trim



Built-in Triness

_ **2A** Built-in Trim
_ **2B** Built-in Triness

Materials Body: Aluminium. Lens: PC- Polycarbonate.	Packaging 1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³ Gross weight 0,84 Kg Net weight 0,74 Kg
Light Source and electronics 2700 K - 3000 K - 3500 K - 4000 K: 1 x LED 17,1W 500 mA Constant Current 500 mA 220~240V. 50/60Hz Tunable White: 1 x LED 8,9W 500 mA Constant Current 500 mA 110~240V. 50/60Hz	TRIM LED IP20 Ø 11,6 cm
	TRIMLESS LED IP20 Ø 13,2 cm

			H = 1,5 m
			H = 3 m
			H = 5 m
ø 0,45 m 4156 lx ø 0,91 m 1039 lx ø 1,51 m 374 lx	ø 0,91 m 1244 lx ø 1,92 m 311 lx ø 3,19 m 112 lx	ø 1,65 m 612 lx ø 3,30 m 153 lx ø 5,51 m 55 lx	

7050
Narrow
7052
Medium
7054
Wide

TRIM

Finishes
● **11/** _ _ Black
(NCS S 8500-N)
● **23/** _ _ Warm White
(NCS S 0502-Y50R)
● **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1_ 2700 K - 2676 lm
/2_ 3000 K - 2798 lm
/3_ 3500 K - 2899 lm
/4_ 4000 K - 2960 lm
E →
Tunable White
/8_ (1800 K - 4000 K)
735 lm - 1152 lm
F →
CRI >90

Control
7050 _ _ / _ _
7052 _ _ / _ _
7054 _ _ / _ _

_ _ / _ **O** On/ Off
_ _ / _ **D** Push; DALI-2
_ _ / _ **M** Without driver
_ _ / _ **Z** Casambi

_ _ / **81** Tunable White +
DALI-2
_ _ / **8M** Tunable White +
Without driver
_ _ / **8Z** Tunable White +
Casambi

⚡ Select Electrical connection



Built-in
Trim Built-in
Trimless

_2A Built-in
Trim
_2B Built-in
Trimless

TRIMLESS

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500 K - 4000 K:

1 x LED 24,8W 700 mA
Constant Current 700 mA
220-240V. 50/60Hz

Tunable White:

1 x LED 12,6W 700 mA
Constant Current 700 mA
110-240V. 50/60Hz

Packaging

1 Box 0,217 x 0,217 x 0,24 m
Vol 0,0113 m³
Gross weight 2,15 Kg Net weight 2,00 Kg

TRIM

LED IP20 CE UK ENE Ø 15,6 cm

TRIMLESS

LED IP20 CE UK ENE Ø 17,2 cm

			H = 1,5 m
			H = 3 m
			H = 5 m
ø 0,45 m 5652 lx ø 0,9 m 1413 lx ø 1,49 m 509 lx	ø 0,91 m 1660 lx ø 1,92 m 415 lx ø 3,20 m 150 lx	ø 1,69 m 800 lx ø 3,38 m 200 lx ø 5,63 m 72 lx	

Ceiling - Track-mounted - Accent Spotlight



Ø 7 cm
7060 Narrow
7062 Medium
7064 Wide



Ø 9 cm
7070 Narrow
7072 Medium
7074 Wide



Ø 12 cm
7080 Narrow
7082 Medium
7084 Wide



Ø 7 cm
7060 Narrow
7062 Medium
7064 Wide



Ø 9 cm
7070 Narrow
7072 Medium
7074 Wide



Ø 12 cm
7080 Narrow
7082 Medium
7084 Wide

7060
Narrow
7062
Medium
7064
Wide

Finishes
● **11/** _ _ Black
(NCS S 8500-N)
● **23/** _ _ Warm White
(NCS S 0502-Y50R)
● **24/** _ _ Beige M1
(NCS S 2005-Y50R)


LED Colour Temperature
Static White
/1 _ 2700 K - 1098 lm
/2 _ 3000 K - 1148 lm
/3 _ 3500 K - 1189 lm
/4 _ 4000 K - 1214 lm
F 

Control
7060 _ _ / _ _
7062 _ _ / _ _
7064 _ _ / _ _
_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **Z** Casambi

 **Select Electrical connection**



Track
Surface



Track
Trimless




_TX Track
Surface
_TZ Track
Trimless

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics
1 x LED 10,4W 600 mA
Constant Current 600 mA
48V. 50/60Hz

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,51 Kg Net weight 0,41 Kg

			H = 1,5 m
			H = 3 m
			H = 5 m
ø 0,5 m 1408 lx ø 0,99 m 352 lx Ø 1,64 m 127 lx	ø 0,93 m 516 lx ø 1,86 m 129 lx Ø 3,10 m 46 lx	ø 1,52 m 272 lx ø 3,03 m 68 lx Ø 5,04 m 24 lx	

7070 Narrow	Finishes	LED Colour Temperature	Control
7072 Medium	● 11/ _ _ Black (NCS S 8500-N)	Static White /1 _ 2700 K - 2676 lm	7070 _ _ / _ _
7074 Wide	● 23/ _ _ Warm White (NCS S 0502-Y50R)	/2 _ 3000 K - 2798 lm	7072 _ _ / _ _
	● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/3 _ 3500 K - 2899 lm	7074 _ _ / _ _
		/4 _ 4000 K - 2960 lm	
		IE >	
			_ _ / _ 0 On/ Off
			_ _ / _ 1 DALI-2
			_ _ / _ Z Casambi

Select Electrical connection



Track Surface Track Trimless

_TX Track Surface
_TZ Track Trimless

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics

1 x LED 17,1W 500 mA
Constant Current 500 mA
48V. 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,84 Kg Net weight 0,74 Kg

LED > IP20 CE UK ENE

			H = 1,5 m
			H = 3 m
			H = 5 m
ø 0,45 m 4156 lx	ø 0,91 m 1244 lx	ø 1,65 m 612 lx	
ø 0,91 m 1039 lx	ø 1,92 m 311 lx	ø 3,30 m 153 lx	
ø 1,51 m 374 lx	ø 3,19 m 112 lx	ø 5,51 m 55 lx	



7080
Narrow
7082
Medium
7084
Wide

Finishes
● **11/** _ _ Black
(NCS S 8500-N)
● **23/** _ _ Warm White
(NCS S 0502-Y50R)
● **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 2676 lm
/2 _ 3000 K - 2798 lm
/3 _ 3500 K - 2899 lm
/4 _ 4000 K - 2960 lm
E >

Control
7080 _ _ / _ _
7082 _ _ / _ _
7084 _ _ / _ _

_ _ / _ 0 On/ Off
_ _ / _ 1 DALI-2
_ _ / _ Z Casambi

Select Electrical connection



Track
Surface

Track
Trimless

_TX Track
Surface
_TZ Track
Trimless

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.
Light Source and electronics
1 x LED 24,8W 700 mA
Constant Current 700 mA
48V. 50/60Hz

Packaging
1 Box 0,217 x 0,217 x 0,024 m
Vol 0,0113 m³
Gross weight 2,15 Kg Net weight 2,00 Kg

LED IP20 CE UK ENE


			H = 1,5 m
			H = 3 m
			H = 5 m
ø 0,45 m 5652 lx ø 0,9 m 1413 lx ø 1,49 m 509 lx	ø 0,91 m 1660 lx ø 1,92 m 415 lx ø 3,20 m 150 lx	ø 1,69 m 800 lx ø 3,38 m 200 lx ø 5,63 m 72 lx	




Tracks and accessories

The Pro collection is complemented by a system of tracks and accessories designed to facilitate its integration into different architectural settings. Available in surface and trimless versions, the program includes tracks, end covers, electrical connectors and drivers that allow the installation to be configured with precision and technical coherence. These elements ensure visual continuity, reliable electrical supply and flexibility in mounting, adapting to the specific requirements of each project.




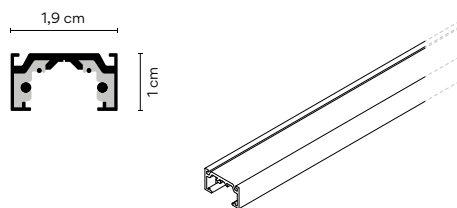


T001 11/OM Surface track 1 m
T002 11/OM Surface track 2 m
T003 11/OM Surface track 3 m

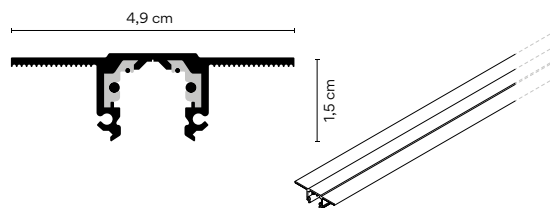


T011 11/OM Trimless track 1 m
T012 11/OM Trimless track 2 m
T013 11/OM Trimless track 3 m

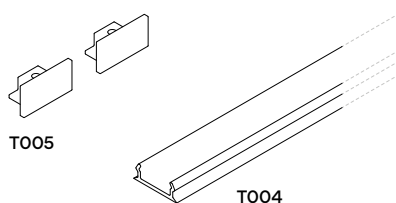


T004 11/OM Surface track cover 3 m
T005 11/OM End caps for surface track (set of 2)

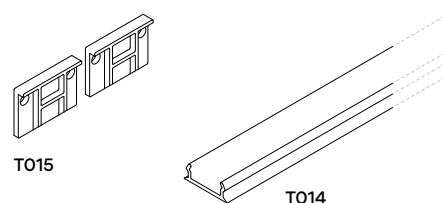



T014 11/OM Trimless track cover 3 m
T015 11/OM End caps for trimless track (set of 2)

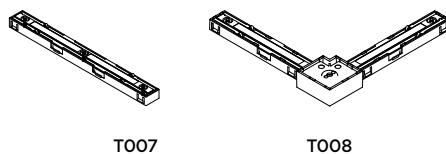


T007 11/OM Straight electrical joint
T008 11/OM L electrical joint for surface track

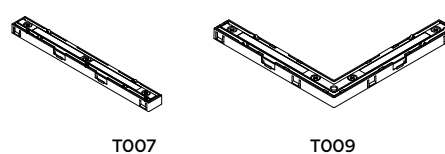

T007 11/OM Straight electrical joint
T009 11/OM L electrical joint for trimless track

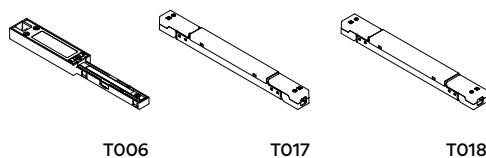

T010 11/OM Electrical connection 100W surface
T006 11/OM Remote feeder for surface track (Required with T017 and T018)
T017 80/OM Electrical connection 48W remote
T018 80/OM Electrical connection 84W remote

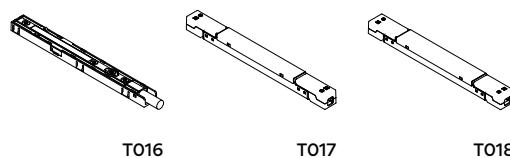

T016 11/OM Remote feeder for trimless track (Required with T017 and T018)
T017 80/OM Electrical connection 48W remote
T018 80/OM Electrical connection 84W remote

Stand-alone - Accent Spotlight



Ø 9 cm

7092 Medium



Ø 12 cm

7102 Medium



Ø 9 cm

7110 Narrow
7112 Medium
7114 Wide



Ø 12 cm

7120 Narrow
7122 Medium
7124 Wide

7092
 PLUG Medium

Finishes	LED Colour Temperature
● 11/ _ _ Black (NCS S 8500-N)	Static White
● 23/ _ _ Warm White (NCS S 0502-Y50R)	/1 _ 2700 K - 1961 lm
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 2050 lm
	/3 _ 3500 K - 2124 lm
	/4 _ 4000 K - 2300 lm
	E 

Control
7092 _ _ / _ _
_ _ / _ 5 Push
_ _ / _ Z Casambi

Materials
 Body: Aluminium.
 Lens: PC- Polycarbonate.


Light Source and electronics
 1 x LED 17,1W 500 mA
 Constant Current 500 mA
 100-240V. 50/60Hz

Packaging
 1 Box 0,272 x 0,161 x 0,148 m
 Vol 0,0064 m³
 Gross weight 1,29 Kg Net weight 1,09 Kg

Notes
 Cable length: 2,5 m.
 Switch on the cable.

LED  IP20  CE  UK  ENEC 

Dimmer  Bi-volt 



7102
 PLUG Medium

Finishes	LED Colour Temperature
● 11/ _ _ Black (NCS S 8500-N)	Static White
● 23/ _ _ Warm White (NCS S 0502-Y50R)	/1 _ 2700 K - 2676 lm
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 2798 lm
	/3 _ 3500 K - 2899 lm
	/4 _ 4000 K - 2960 lm
	E 

Control
7102 _ _ / _ _
_ _ / _ 5 Push
_ _ / _ Z Casambi

Materials
 Body: Aluminium.
 Lens: PC- Polycarbonate.


Light Source and electronics
 1 x LED 24,8W 700 mA
 Constant Current 700 mA
 100-240V. 50/60Hz

Packaging
 1 Box 0,217 x 0,217 x 0,318 m
 Vol 0,0149 m³
 Gross weight 2,79 Kg Net weight 2,64 Kg

Notes
 Cable length: 2,5 m.
 Switch on the cable.

LED  IP20  CE  UK  ENEC 

Dimmer  Bi-volt 



7110
BOLT-DOWN
Narrow

7112
BOLT-DOWN
Medium

7114
BOLT-DOWN
Wide

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **23/** _ _ Warm White
(NCS S 0502-Y50R)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 1961 lm
/2 _ 3000 K - 2050 lm
/3 _ 3500 K - 2124 lm
/4 _ 4000 K - 2300 lm

E 

Tunable White

/8 _ (1800 K - 4000 K)
571 lm - 895 lm

F 

CRI >90

Control

7110 _ _ / _ _
7112 _ _ / _ _
7114 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **Z** Casambi

_ _ / **81** Tunable White +
DALI-2
_ _ / **8Z** Tunable White +
Casambi

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500 K - 4000 K:

1 x LED 17,1W 500 mA
Constant Current 500 mA
220~240V. 50/60Hz


Tunable White:

1 x LED 8,9W 500 mA
Constant Current 700 mA
110~240V. 50/60Hz

Packaging

1 Box 0,25 x 0,161 x 0,148 m
Vol 0,0059 m³
Gross weight 1,29 Kg Net weight 1,09 Kg

LED  **IP20**    

			H = 5 m
			H = 3 m
			H = 1,5 m
ø 0,45 m 4156 lx ø 0,91 m 1039 lx ø 1,51 m 374 lx	ø 0,91 m 1244 lx ø 1,92 m 311 lx ø 3,19 m 112 lx	ø 1,65 m 612 lx ø 3,30 m 153 lx ø 5,51 m 55 lx	

7120
BOLT-DOWN
Narrow

7122
BOLT-DOWN
Medium

7124
BOLT-DOWN
Wide

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **23/** _ _ Warm White
(NCS S 0502-Y50R)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 2676 lm
/2 _ 3000 K - 2798 lm
/3 _ 3500 K - 2899 lm
/4 _ 4000 K - 2960 lm

E 

Tunable White

/8 _ (1800 K - 4000 K)
735 lm - 1152 lm

F 

CRI >90

Control

7120 _ _ / _ _
7122 _ _ / _ _
7124 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **Z** Casambi

_ _ / **81** Tunable White +
DALI-2
_ _ / **8Z** Tunable White +
Casambi

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500 K - 4000 K:

1 x LED 24,8W 700 mA
Constant Current 700 mA
220~240V. 50/60Hz




Tunable White:

1 x LED 12,6W 700 mA
Constant Current 700 mA
110~240V. 50/60Hz

Packaging

1 Box 0,217 x 0,217 x 0,30 m
Vol 0,0141 m³
Gross weight 2,79 Kg Net weight 2,64 Kg

LED  **IP20**    

			H = 5 m
			H = 3 m
			H = 1,5 m
ø 0,45 m 5652 lx ø 0,9 m 1413 lx ø 1,49 m 509 lx	ø 0,91 m 1244 lx ø 1,92 m 311 lx ø 3,20 m 112 lx	ø 1,69 m 800 lx ø 3,38 m 200 lx ø 5,63 m 72 lx	



Plusminus Essentials

Plusminus Essentials distills the Plusminus collection into its most essential expression. A simplified lighting system that reinterprets the concept of a lighting track through a plug-and-play approach.

At its core, a conductive textile ribbon allows luminaires to be positioned intuitively.



Compose your Plusminus Essentials in three steps

Select one of the four available toolboxes:

- + Belt finish
- + Control type
- + Electrical connection



Select luminaires:

- + Finish
- + LED colour temperature



Optional: add additional accessories


- + Counterweight
- + Wire connector

Each Toolbox includes all the components required to create different Plusminus Essentials compositions, including the conductive textile ribbon, as well as installation and electrical connection accessories. Additional units are also included to allow for adjustments during on-site installation.



TB01

Using a maximum of two ceiling anchoring points, the luminaires are suspended above the area to be illuminated: dining tables, kitchen islands or reading corners. A clear, lightweight lighting gesture that focuses illumination where activity takes place, with a subtle visual presence.

Possible compositions with TB01

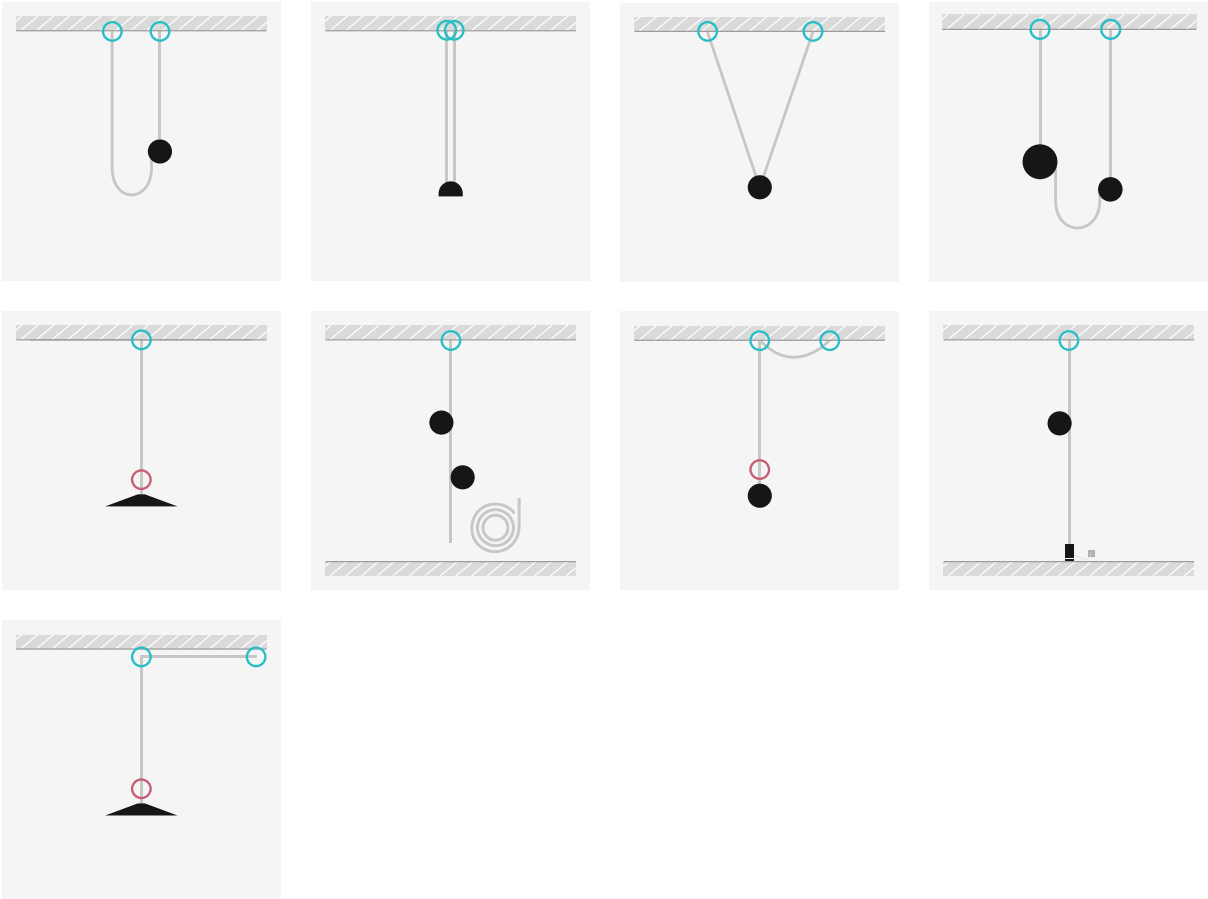

1. Fixed content

	Belt terminations		Fasten accessories
	Pendant End Cap 1 un.		Belt Support 2 un.

2. Select Belt finish

Belt (6m)

Finishes

- 11/ __ Black
- 24/ __ Beige
- 38/ __ Terra Red
- 42/ __ Blue
- 53/ __ Green


Belt

Polyester

Fire Hazard Testing. GW-960.

fulfills the requirements of:
standards EN 60695-2-10:2013;
EN 60695-2-11:2015;
EN 60695-2-12:2011 / A1:2014

3. Select Electrical Connection Accesories



Surface Canopy S
E1 Ø 205 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI;
Casambi.

Body: ABS.
Net weight 0,9 Kg.

TB01 __ / __

- __ / 00_10 On/ Off Surface
- __ / 01_10 DALI Surface
- __ / 03_10 1-10V Surface
- __ / 05_10 Push Surface
- __ / 0Z_10 Casambi Surface

IP20 CE UK ENE Dimmer Bi-volt



Built-in Canopy
E3 Ø 120 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI;
Casambi.


Body: ABS.
Net weight 1,08 - 1,860 Kg.

TB01 __ / __

- __ / 00_24 On/ Off Built-in
- __ / 01_24 DALI Built-in
- __ / 03_24 1-10V Built-in
- __ / 05_24 Push Built-in
- __ / 0Z_24 Casambi Built-in

25/40/60W

IP20 CE UK ENE Dimmer Bi-volt



Remote Built-in Canopy
E4 Ø 60 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI;
Casambi.


Body: ABS.
Net weight 0,87 - 1,65 Kg.

TB01 __ / __

- __ / 00_32 On/ Off Remote
- __ / 01_32 DALI Remote
- __ / 03_32 1-10V Remote
- __ / 05_32 Push Remote
- __ / 0Z_32 Casambi Remote

25/40/60W

IP20 CE UK ENE Dimmer Bi-volt



Plug-in Floor Switch
E6 Ø 90 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi.

Body: ABS.

TB01 __ / __

- __ / 00_50 On/ Off Plug-in
- __ / 05_50 Push Plug-in
- __ / 0Z_50 Casambi Plug-in


25/40/60W

IP20 CE UK ENE Dimmer Bi-volt




TB02

This combination of accessories enables the creation of robust, tensioned light paths that structure a specific area within a space. It provides general illumination while helping to establish visual hierarchies. It is particularly suitable for settings such as reading corners, corridors, dining areas or compact domestic environments, where light helps organise and define the space.

Possible compositions with TB02

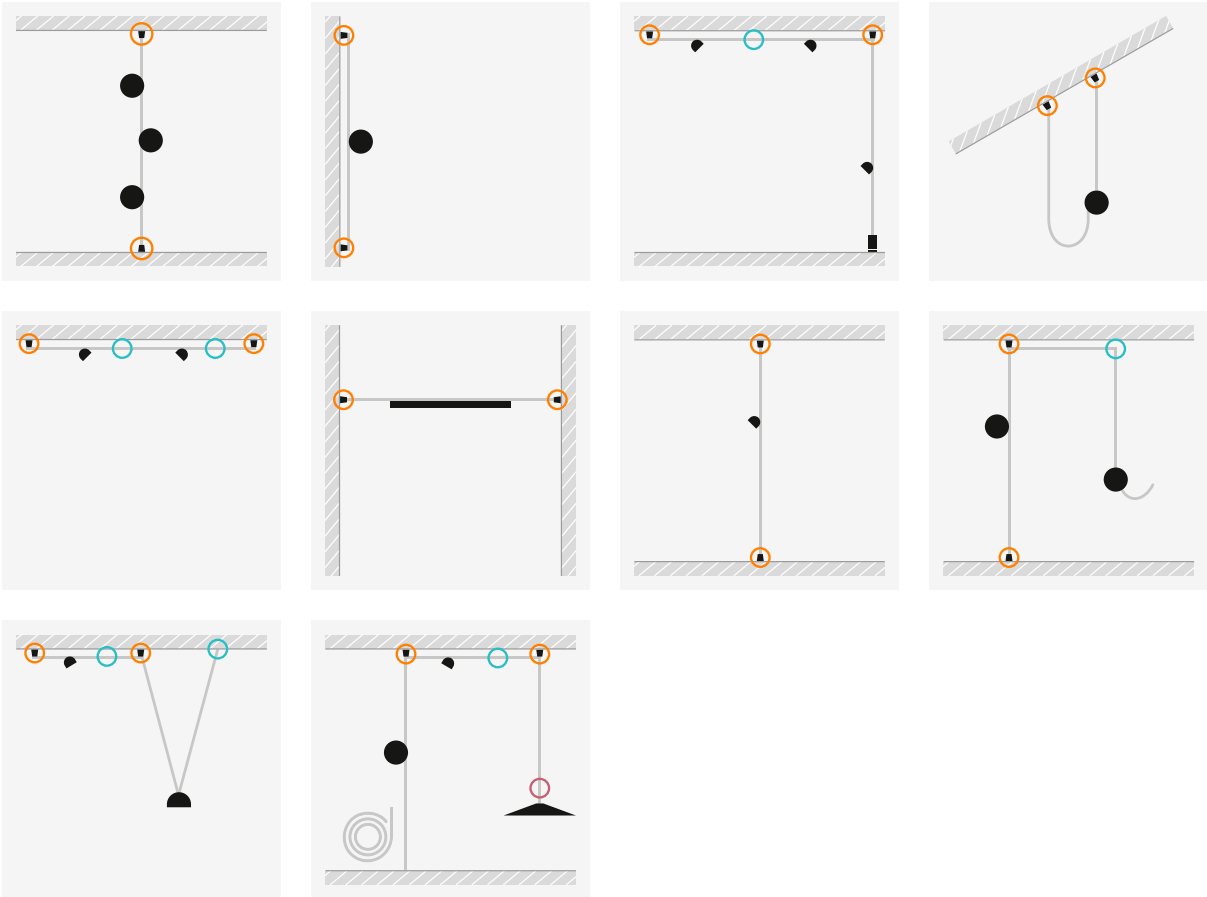

1. Fixed content

	 Belt terminations Pendant End Cap 1 un.		 Fasten accessories Belt Support 2 un.		 Fasten accessories Circular Ratchet 2 un.
--	---	---	---	---	---

2. Select Belt finish

Belt (6m)

Finishes

- 11/ __ Black
- 24/ __ Beige
- 38/ __ Terra Red
- 42/ __ Blue
- 53/ __ Green


Belt

Polyester

Fire Hazard Testing. GW-960.

fulfills the requirements of:
standards EN 60695-2-10:2013;
EN 60695-2-11:2015;
EN 60695-2-12:2011 / A1:2014

3. Select Electrical Connection Accesories



Surface Canopy S
E1 Ø 205 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI;
Casambi.

Body: ABS.
Net weight 0,9 Kg.

TB02 __ / __

- __ / 00_10 On/ Off Surface
- __ / 01_10 DALI Surface
- __ / 03_10 1-10V Surface
- __ / 05_10 Push Surface
- __ / 0Z_10 Casambi Surface

IP20 CE UK ENE Dimmer Bi-volt



Built-in Canopy
E3 Ø 120 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI;
Casambi.


Body: ABS.
Net weight 1,08 - 1,860 Kg.

TB02 __ / __

- __ / 00_24 On/ Off Built-in
- __ / 01_24 DALI Built-in
- __ / 03_24 1-10V Built-in
- __ / 05_24 Push Built-in
- __ / 0Z_24 Casambi Built-in

25/40/60W

IP20 CE UK ENE Dimmer Bi-volt



Remote Built-in Canopy
E4 Ø 60 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI;
Casambi.


Body: ABS.
Net weight 0,87 - 1,65 Kg.

TB02 __ / __

- __ / 00_32 On/ Off Remote
- __ / 01_32 DALI Remote
- __ / 03_32 1-10V Remote
- __ / 05_32 Push Remote
- __ / 0Z_32 Casambi Remote

25/40/60W

IP20 CE UK ENE Dimmer Bi-volt



Plug-in Floor Switch
E6 Ø 90 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi.

Body: ABS.

TB02 __ / __

- __ / 00_50 On/ Off Plug-in
- __ / 05_50 Push Plug-in
- __ / 0Z_50 Casambi Plug-in


25/40/60W

IP20 CE UK ENE Dimmer Bi-volt

TB03

Following the intention of illuminating focused, activity-based surfaces, this configuration uses a longer ribbon and additional supports to create sequences of light points that generate rhythm and continuity along the visual path. It is suitable for elongated surfaces such as long tables, kitchen islands, circulation areas or reading spots.

Possible compositions with TB03

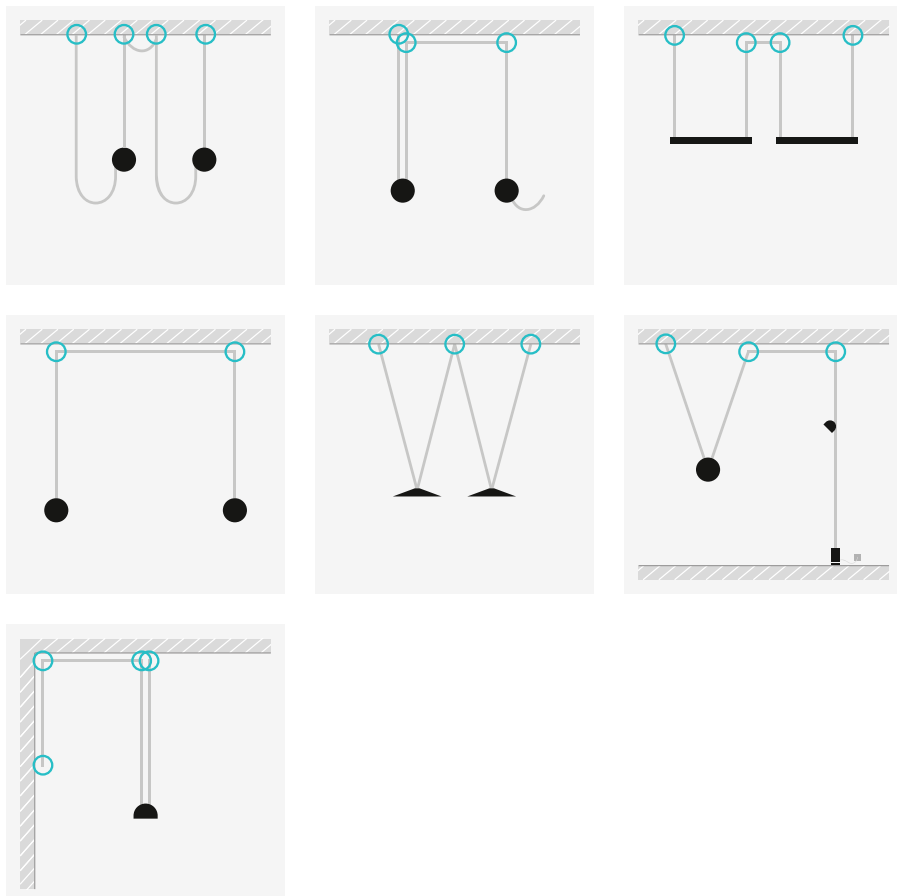

1. Fixed content



B5 Belt terminations

Pendant End Cap
1 un.



F3 Fasten accessories

Belt Support
4 un.

2. Select Belt finish

Belt (10m)

Finishes

- 11/ __ Black
- 24/ __ Beige
- 38/ __ Terra Red
- 42/ __ Blue
- 53/ __ Green


Belt

Polyester

Fire Hazard Testing. GW-960.

fulfills the requirements of:
standards EN 60695-2-10:2013;
EN 60695-2-11:2015;
EN 60695-2-12:2011 / A1:2014

3. Select Electrical Connection Accesories



Surface Canopy S
E1 Ø 205 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI;
Casambi.

Body: ABS.
Net weight 0,9 Kg.

TB03 __ / __

- __ / 00_10 On/ Off Surface
- __ / 01_10 DALI Surface
- __ / 03_10 1-10V Surface
- __ / 05_10 Push Surface
- __ / 0Z_10 Casambi Surface

IP20 CE UK ENE Dimmer Bi-volt



Built-in Canopy
E3 Ø 120 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI;
Casambi.


Body: ABS.
Net weight 1,08 - 1,860 Kg.

TB03 __ / __

- __ / 00_24 On/ Off Built-in
- __ / 01_24 DALI Built-in
- __ / 03_24 1-10V Built-in
- __ / 05_24 Push Built-in
- __ / 0Z_24 Casambi Built-in

25/40/60W

IP20 CE UK ENE Dimmer Bi-volt



Remote Built-in Canopy
E4 Ø 60 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI;
Casambi.


Body: ABS.
Net weight 0,87 - 1,65 Kg.

TB03 __ / __

- __ / 00_32 On/ Off Remote
- __ / 01_32 DALI Remote
- __ / 03_32 1-10V Remote
- __ / 05_32 Push Remote
- __ / 0Z_32 Casambi Remote

25/40/60W

IP20 CE UK ENE Dimmer Bi-volt



Plug-in Floor Switch
E6 Ø 90 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi.

Body: ABS.

TB03 __ / __

- __ / 00_50 On/ Off Plug-in
- __ / 05_50 Push Plug-in
- __ / 0Z_50 Casambi Plug-in


25/40/60W

IP20 CE UK ENE Dimmer Bi-volt


TB04

This configuration allows multiple points of light to be distributed along a longer ribbon, creating depth and visual hierarchies within the space. It combines the previous typologies, enabling the highlighting of specific points, providing general illumination and adapting to large, open spaces while structuring the overall spatial composition.


Possible compositions with TB04

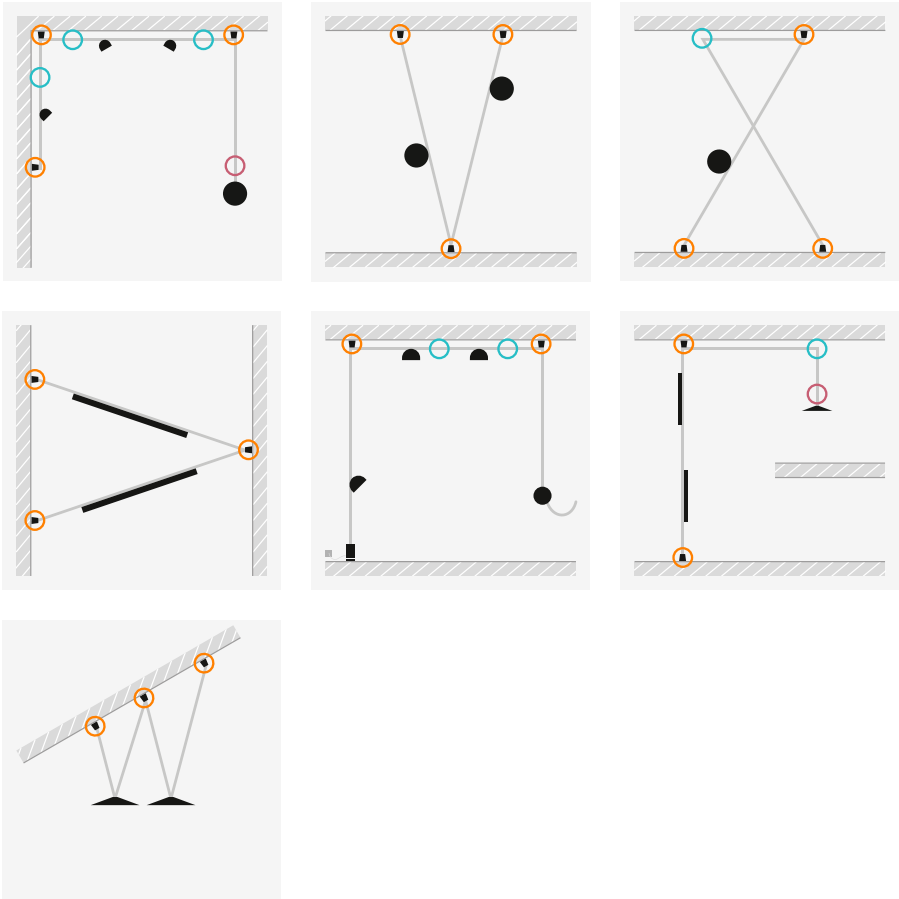

1. Fixed content



B5 Belt terminations
Pendant End Cap
1 un.



F3 Fasten accessories
Belt Support
3 un.



F1 Fasten accessories
Circular Ratchet
3 un.

2. Select Belt finish

Belt (10m)

Finishes

- 11/ __ Black
- 24/ __ Beige
- 38/ __ Terra Red
- 42/ __ Blue
- 53/ __ Green


Belt

Polyester

Fire Hazard Testing. GW-960.

fulfills the requirements of:
standards EN 60695-2-10:2013;
EN 60695-2-11:2015;
EN 60695-2-12:2011 / A1:2014

3. Select Electrical Connection Accesories



Surface Canopy S
E1 Ø 205 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI;
Casambi.

Body: ABS.
Net weight 0,9 Kg.

TB04 __ / __

- __ / 00_10 On/ Off Surface
- __ / 01_10 DALI Surface
- __ / 03_10 1-10V Surface
- __ / 05_10 Push Surface
- __ / 0Z_10 Casambi Surface

IP20 CE UK ENE Dimmer Bi-volt



Built-in Canopy
E3 Ø 120 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI;
Casambi.


Body: ABS.
Net weight 1,08 - 1,860 Kg.

TB04 __ / __

- __ / 00_24 On/ Off Built-in
- __ / 01_24 DALI Built-in
- __ / 03_24 1-10V Built-in
- __ / 05_24 Push Built-in
- __ / 0Z_24 Casambi Built-in

25/40/60W

IP20 CE UK ENE Dimmer Bi-volt



Remote Built-in Canopy
E4 Ø 60 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI;
Casambi.


Body: ABS.
Net weight 0,87 - 1,65 Kg.

TB04 __ / __

- __ / 00_32 On/ Off Remote
- __ / 01_32 DALI Remote
- __ / 03_32 1-10V Remote
- __ / 05_32 Push Remote
- __ / 0Z_32 Casambi Remote

25/40/60W

IP20 CE UK ENE Dimmer Bi-volt



Plug-in Floor Switch
E6 Ø 90 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi.

Body: ABS.

TB04 __ / __

- __ / 00_50 On/ Off Plug-in
- __ / 05_50 Push Plug-in
- __ / 0Z_50 Casambi Plug-in

25/40/60W

IP20 CE UK ENE Dimmer Bi-volt

Sphere



6230

Ø 20 cm



6235

Ø 30 cm

6230

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 846 lm
- /2 _ 3000 K - 884 lm
- /3 _ 3500 K - 916 lm

E

CRI >90

Control

6230 _ _ / _ _

_ _ / _ **O** On/Off

_ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics

1 x LED 7,9 W 450 mA

Packaging

1 Box 0,26 x 0,26 x 0,260 m
Vol 0,0175 m³
Gross weight 1,56 Kg Net weight 0,93 Kg

LED IP20 CE UK ENEC Dimmer

6235

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 1492 lm
- /2 _ 3000 K - 1569 lm
- /3 _ 3500 K - 1606 lm

F

CRI >90

Control

6235 _ _ / _ _

_ _ / _ **O** On/Off

_ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics

1 x LED 16 W 850 mA

Packaging

1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2,50 Kg Net weight 1,80 Kg

LED IP20 CE UK ENEC Dimmer

Semisphere



6220
Ø 20 cm



6225
Ø 30 cm

6220

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **37/** _ _ Terra Red
(NCS S 4040-Y70R)
 - **42/** _ _ Blue M1
(NCS S 5010-B10G)
 - **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm

E >

CRI >90

Control

6220 _ _ / _ _

_ _ / _ **O** On/Off
 _ _ / _ **F** Simultaneous line
 Push; 1-10V;
 Casambi; DALI

Materials

Shade: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA

Packaging

1 Box 0,26 x 0,26 x 0,26 m
 Vol 0,0175 m³
 Gross weight 1,20 Kg Net weight 0,78 Kg

LED IP20 CE ENEC ENEC Dimmer

6225

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **37/** _ _ Terra Red
(NCS S 4040-Y70R)
 - **42/** _ _ Blue M1
(NCS S 5010-B10G)
 - **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1492 lm
/2 _ 3000 K - 1569 lm
/3 _ 3500 K - 1606 lm

F >

CRI >90

Control

6225 _ _ / _ _

_ _ / _ **O** On/Off
 _ _ / _ **F** Simultaneous line
 Push; 1-10V;
 Casambi; DALI

Materials

Shade: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 16 W 850 mA

Packaging

1 Box 0,364 x 0,364 x 0,364 m
 Vol 0,0482 m³
 Gross weight 2 Kg Net weight 1,5 Kg

LED IP20 CE ENEC ENEC Dimmer

Cone



6240
Ø 60 cm



6245
Ø 80 cm

6240

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **37/** _ _ Terra Red
(NCS S 4040-Y70R)
 - **42/** _ _ Blue M1
(NCS S 5010-B10G)
 - **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 1492 lm
- /2 _ 3000 K - 1569 lm
- /3 _ 3500 K - 1606 lm

F >90

Control

6240 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source and electronics
1 x LED 16 W 850 mA

Packaging

0,727 x 0,727 x 0,32 m
Vol 0,1691 m³
Gross weight 5 Kg Net weight 2,5 Kg

LED IP20 CE UK ENEC Dimmer

6245

- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **37/** _ _ Terra Red
(NCS S 4040-Y70R)
 - **42/** _ _ Blue M1
(NCS S 5010-B10G)
 - **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 1492 lm
- /2 _ 3000 K - 1569 lm
- /3 _ 3500 K - 1606 lm

F >90

Control

6245 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source and electronics
1 x LED 16 W 850 mA

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,2488 m³
Gross weight 7 Kg Net weight 3,5 Kg

LED IP20 CE UK ENEC Dimmer

Spotlight



Spot Accent Light
6200 Narrow
Ø 10 cm



Spot Accent Light
6205 Medium
6210 Wide
Ø 10 cm



Spot Flat Diffuser
6215
Ø 10 cm

6200 Narrow

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 846 lm
- /2** _ 3000 K - 884 lm
- /3** _ 3500 K - 916 lm



CRI >90

Control

6200 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg



6205 Medium

Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 846 lm
- /2** _ 3000 K - 884 lm
- /3** _ 3500 K - 916 lm



CRI >90

Control

6205 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg



Select
luminaires

6210

Wide

11/ _ _ Black

(NCS S 8500-N)

24/ _ _ Beige M1

(NCS S 2005-Y50R)

37/ _ _ Terra Red

(NCS S 4040-Y70R)

42/ _ _ Blue M1

(NCS S 5010-B10G)

53/ _ _ Green M1

(NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 846 lm

/2 _ 3000 K - 884 lm

/3 _ 3500 K - 916 lm

E

CRI >90

Control

6210 _ _ / _ _

_ _ / _ 0 On/Off

_ _ / _ F Simultaneous line

Push; 1-10V;

Casambi; DALI

Materials

Shade: Aluminum.

Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m

Vol 0,0046 m³

Gross weight 0,719 Kg Net weight 0,51 Kg

LED

IP20

CE

UK

EAC

Dimmer

6215

Flat Diffuser

11/ _ _ Black

(NCS S 8500-N)

24/ _ _ Beige M1

(NCS S 2005-Y50R)

37/ _ _ Terra Red

(NCS S 4040-Y70R)

42/ _ _ Blue M1

(NCS S 5010-B10G)

53/ _ _ Green M1

(NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 491 lm

/2 _ 3000 K - 513 lm

/3 _ 3500 K - 532 lm

E

CRI >90

Control

6215 _ _ / _ _

_ _ / _ 0 On/Off

_ _ / _ F Simultaneous line

Push; 1-10V;

Casambi; DALI

Materials

Shade: Aluminum.

Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m

Vol 0,0046 m³

Gross weight 0,719 Kg Net weight 0,51 Kg

LED


IP20

CE

UK

EAC


Dimmer

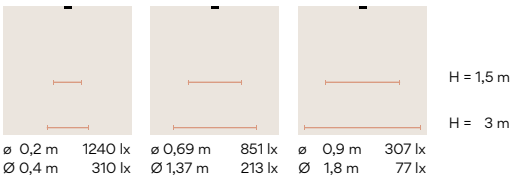

Spot Accent Light



Spot Flat Diffuser



Linear diffuser



6250



- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **37/** _ _ Terra Red
(NCS S 4040-Y70R)
 - **42/** _ _ Blue M1
(NCS S 5010-B10G)
 - **53/** _ _ Green M1
(NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 2544 lm
 - /2** _ 3000 K - 2628 lm
 - /3** _ 3500 K - 2712 lm
- CRI** >90

Control

- 6250** _ _ / _ _
- _ _ / _ **O** On/Off
 - _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,06 x 0,06 x 1,25 m
Vol 0,0057 m³
Gross weight 1,5 Kg Net weight 0,72 Kg

LED IP20 CE ENEC ENEC Dimmer

6255



- Finishes**
- **11/** _ _ Black
(NCS S 8500-N)
 - **24/** _ _ Beige M1
(NCS S 2005-Y50R)
 - **37/** _ _ Terra Red
(NCS S 4040-Y70R)
 - **42/** _ _ Blue M1
(NCS S 5010-B10G)
 - **53/** _ _ Green M1
(NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 5088 lm
 - /2** _ 3000 K - 5256 lm
 - /3** _ 3500 K - 5424 lm
- CRI** >90

Control

- 6255** _ _ / _ _
- _ _ / _ **O** On/Off
 - _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 41,3 W 24 V

Packaging

1 Box 0,06 x 0,06 x 2,24 m
Vol 0,0103 m³
Gross weight 2 Kg Net weight 1,45 Kg

LED IP20 CE ENEC ENEC Dimmer

Linear Low UGR - High-Comfort



6260

26,8 x 7 x 3 cm



6265

52,5 x 7 x 3 cm




6270

103,7 x 7 x 3 cm



6260



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 1281 lm
 - /2 _ 3000 K - 1323 lm
 - /3 _ 3500 K - 1366 lm
- >
- CRI >90

Control

6260 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics
1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m³
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19

LED IP20 CE UK ENEC Dimmer

6265



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 2562 lm
- /2 _ 3000 K - 2647 lm
- /3 _ 3500 K - 2731 lm

D >90

Control

6265 _ _ / _ _

_ _ / _ **O** On/Off
_ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19

LED IP20 CE UK ENE Dimmer

6270



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 5124 lm
- /2 _ 3000 K - 5293 lm
- /3 _ 3500 K - 5462 lm

D >90

Control

6270 _ _ / _ _

_ _ / _ **O** On/Off
_ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 41,3 W 24 V

Packaging

1 Box 0,08 x 0,11 x 1,10 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19

LED IP20 CE UK ENE Dimmer

Linear Low UGR - High-Efficiency




6275

26,8 x 7 x 3 cm




6280

52,5 x 7 x 3 cm

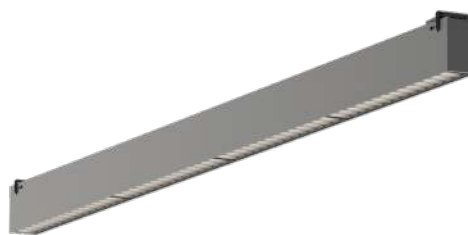


6285

103,7 x 7 x 3 cm



6275



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1_ 2700 K - 1281 lm
- /2_ 3000 K - 1323 lm
- /3_ 3500 K - 1366 lm

 CRI >90

Control

6275 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 10,3 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m³
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19

      Dimmer

6280



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 2562 lm
- /2 _ 3000 K - 2647 lm
- /3 _ 3500 K - 2731 lm

D >90

Control

6280 _ _ / _ _

_ _ / _ **O** On/Off
_ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,57 m

Vol 0,0050 m³


Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19

LED IP20 CE UK ENE Dimmer

6285



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1 _ 2700 K - 5124 lm
- /2 _ 3000 K - 5293 lm
- /3 _ 3500 K - 5462 lm

D >90

Control

6285 _ _ / _ _

_ _ / _ **O** On/Off
_ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 41,3 W 24V

Packaging

1 Box 0,08 x 0,11 x 1,102 m

Vol 0,0096 m³


Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19

LED IP20 CE UK ENE Dimmer

Optional,
add additional accessories




Wire Connector
E8 Ø 3,1 mm.
Wattage options:
< 60W.

Finishes
● 11/ _ _ Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 50/60Hz.

Materials
Body: ABS.

A52411/00



Counterweight
Finishes
● 11/ _ _ Black
(NCS S 8500-N)

Materials
Body: Cast Iron.

A52511/00





Glossary

CE

Product fulfills the requirements of the relevant European directives.

UK

Product fulfills the requirements of Great Britain relevant legislation.

EU

Product complying with TP TC 004/2011 and TP TC 020/2011. Custom Union Regulation

☞

Product that complies with the law N24-09 of the current Moroccan legislation.

IP

Level of protection. Electrical products are prepared to avoid solids and liquids from getting in contact with the electrical parts. Such resistance is expressed as IP followed by two digits: the first digit indicates the level of resistance to solid objects and the second one to liquids. The scale goes from IP20 to IP69.

IP20

Product protected against solid object as big as or bigger than 12 mm. No protection against water.

↑ IP20 ↓ IP40

Product protected against solid objects as big as or bigger than 12 mm in the built-in part. In the visible part of the luminaire, product protected against solid objects as big as or bigger than 1 mm. No protection against water.

IP64

Dust-tight product. Protected against water spray.

IP65

Dust-tight product. Protected against water trickles.

IP66

Dust-tight product. Protected against water spurts.

Insulation class

Ⓛ

Class I. Product with an additional protection cable (grounds).

□

Class II. Product protected against electric shock having a double insulation. No grounds.

Ⓜ

Class III. Product protected against electric shock based on a very-low voltage system. No grounds.

Bi-volt

Valid for the range 110V-230V, 50-60Hz.

Multi-volt

Valid for the range 110-277V, 50-60Hz.

Cut out



Property for embedding dimension.

Integrated Dimmer

Dimmer

Lamp that has a integrated dimmer.

EU Energetic label

More Efficacy

A

B

C

D

E

F

G

Less Efficacy

Light source information

CRI

Colour rendering index.

K

LED Colour Temperature.

lm


Lumen, unit of measurement of luminous flux.

lm/W


Light source performance. Relationship between the luminous flux (lm) and the power consumed (W) by the source.

Lighting control systems


1 Push control

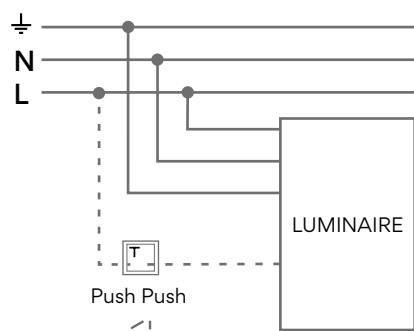


2 1-10V System control

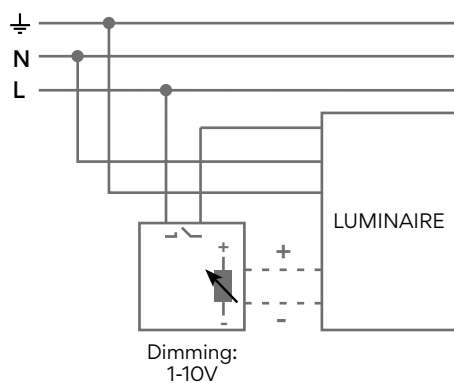


3 DALI System control

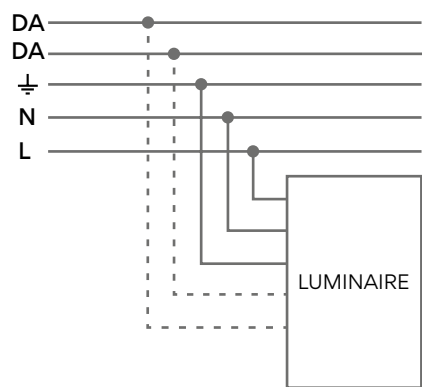


4 Casambi control

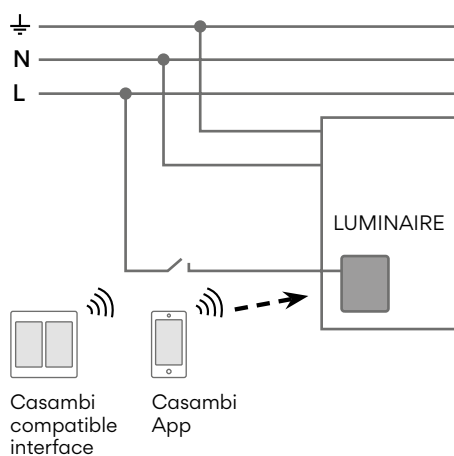

5 ProtoPixel control

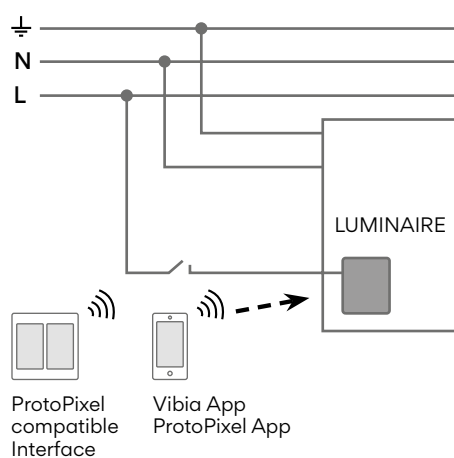

6 TRIAC control

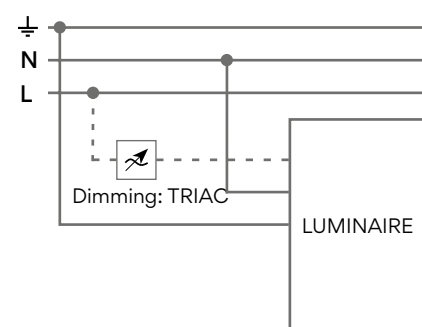

⏏	Ground	L	Line
N	Neutral	DA	DALI-Digital Signal

Very important

Vibia Lighting S.L.U. has the right to change any model or finish of the products included in the picture catalogue without any previous notice.

ACKNOWLEDGEMENTS

Yoyo Balagué
yoyobalague.com
@yoyobabcn
(Page 19)

Project: Espacio Home Design
(Page 64)

Vibia Lighting, S.L.U.

Office

Progrés 4-6.
08850 Gavà (Barcelona).
International Tel +34 934 796 971.

customer.service@vibia.com
vibia.com

COPYRIGHT© VIBIA LIGHTING S.L.U. ALL RIGHTS RESERVED.

